

Lichttechnischer Prüfbefund

Familie
Floodlight FL11

Bestell-Nr.: 5XA779615X01AB
EAN: 4069025142344

LP-Nummer
59552_105

Kegelmantelkurven in cd/klm


KMK 60°

KMK 57,5°

KMK 55°

KMK 52,5°

siteco

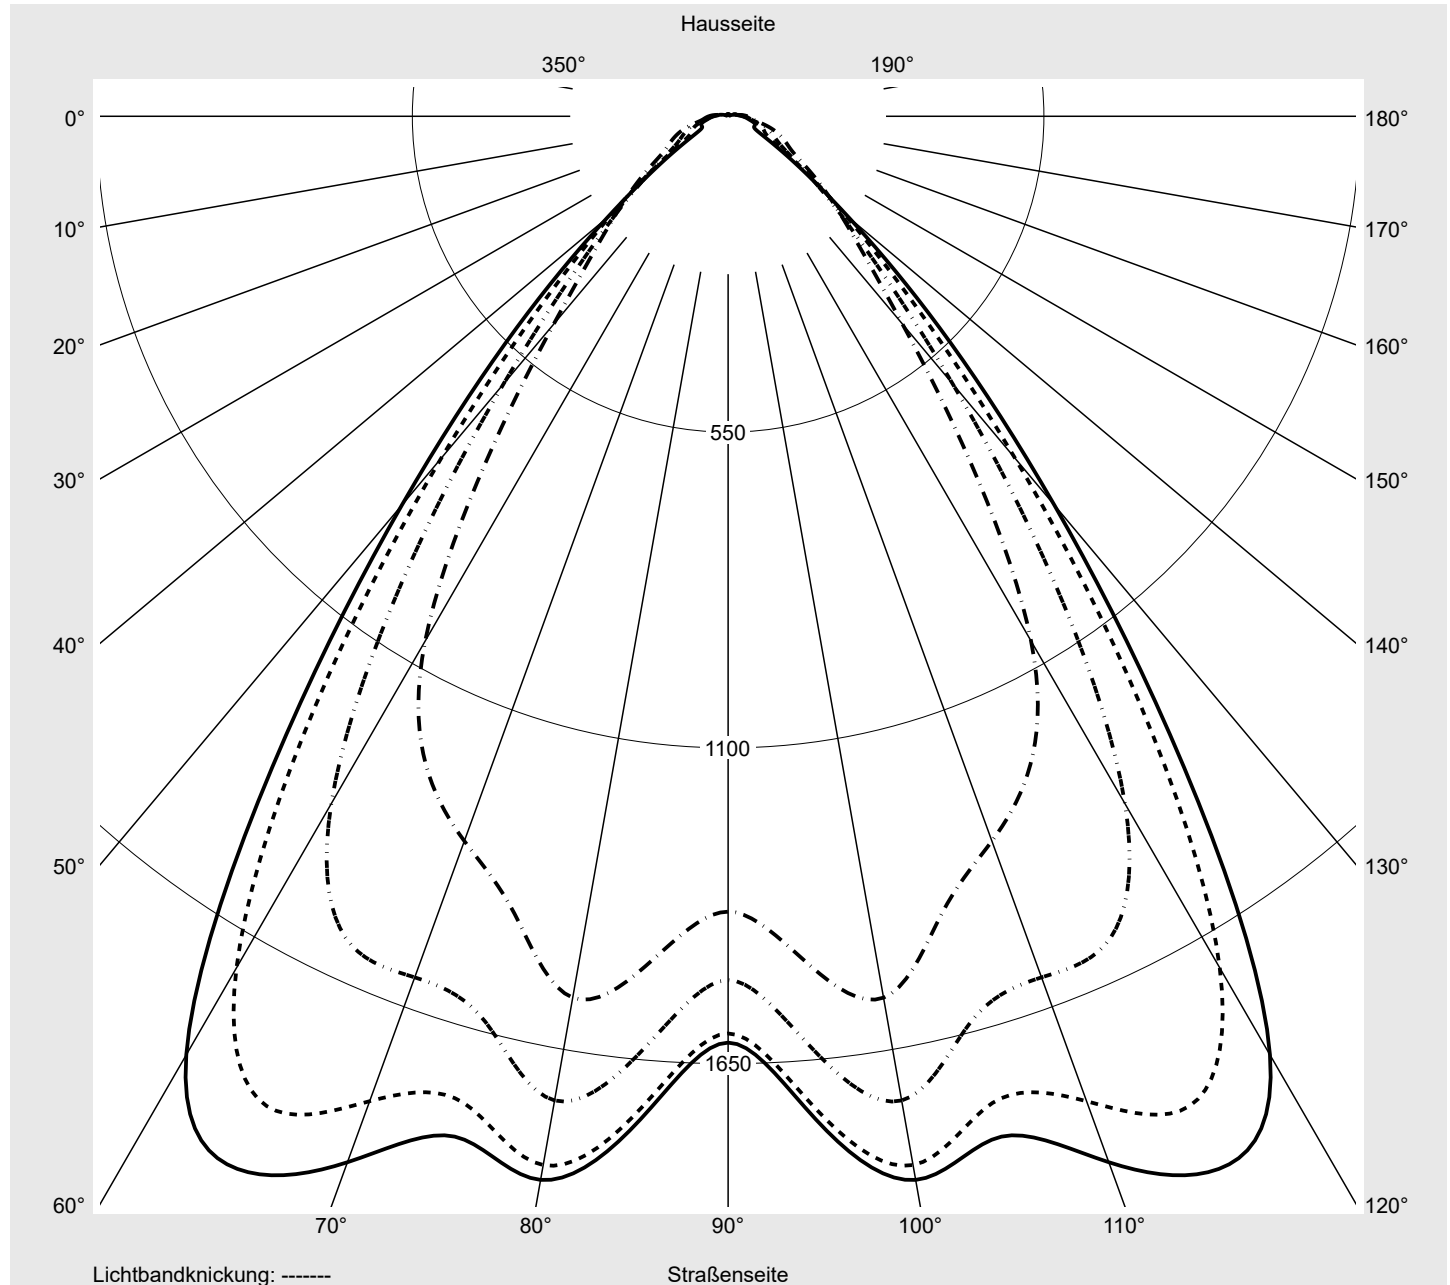

Lichttechnischer Prüfbefund

Familie Floodlight FL11				Bestell-Nr.: 5XA779615X01AB EAN: 4069025142344								LP-Nummer 59552_105	
Wertetabelle Lichtstärkemessung										Maximale Lichtstärke		siteco	
C- Ebenen	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Lichtstärke in cd/klm												
0,0°	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5
2,5°	94.9	95.1	96.2	97.4	98.7	100.0	101.3	102.5	103.7	104.9	106.1	107.2	108.2
5,0°	92.9	94.1	96.5	99.1	101.9	105.1	108.5	112.1	115.8	119.4	122.8	126.1	129.2
7,5°	89.6	91.7	95.3	99.5	104.6	110.3	116.4	122.5	128.8	135.2	141.4	147.7	153.3
10,0°	85.3	88.2	93.2	99.7	107.2	115.3	123.7	132.3	141.2	151.1	161.1	171.3	181.3
12,5°	81.4	85.5	92.1	100.5	109.7	119.7	130.4	142.6	155.6	169.6	184.6	199.3	214.2
15,0°	80.0	85.8	94.3	104.4	114.9	126.4	140.3	156.1	173.8	193.0	211.9	228.4	243.5
17,5°	79.9	87.6	98.4	110.1	122.0	136.6	153.6	172.7	192.5	211.0	228.3	246.4	266.9
20,0°	78.4	87.8	100.5	114.2	129.7	148.2	168.9	189.8	207.9	225.3	246.3	271.3	300.7
22,5°	74.7	85.7	100.2	117.0	137.8	161.0	183.4	203.6	224.9	249.5	278.2	308.8	340.0
25,0°	69.8	81.5	97.2	117.7	143.2	168.1	190.1	215.3	243.0	274.3	308.6	339.3	365.4
27,5°	64.6	75.9	92.4	116.7	146.1	172.4	200.1	232.6	264.3	294.6	321.2	341.9	361.1
30,0°	60.0	70.6	88.4	117.6	151.0	183.3	218.3	257.9	288.5	303.1	310.4	320.4	340.0
32,5°	56.2	66.8	86.9	121.5	159.4	198.1	242.6	290.3	311.0	304.6	295.6	304.3	335.0
35,0°	53.4	64.6	87.2	121.2	163.4	211.4	264.4	309.9	316.0	300.7	293.9	312.3	353.0
37,5°	51.2	64.5	85.1	114.4	163.4	220.4	274.9	303.6	301.2	295.9	301.3	326.5	377.6
40,0°	50.2	64.4	80.3	109.5	160.7	219.2	266.0	276.8	283.6	300.2	315.2	342.8	395.9
42,5°	48.7	63.2	77.3	110.4	162.0	212.2	245.7	253.1	280.4	311.7	330.6	358.7	415.7
45,0°	45.3	60.5	74.0	109.5	158.2	193.8	215.1	238.0	286.5	321.9	342.6	384.6	471.8
47,5°	41.2	55.5	66.2	99.4	140.4	164.7	185.9	226.5	280.1	321.5	356.5	444.4	591.0
50,0°	37.3	48.0	58.4	87.0	116.9	136.3	160.4	207.7	260.3	316.2	394.3	561.6	793.7
52,5°	33.8	41.1	51.6	74.9	95.6	112.8	135.7	183.4	244.2	326.9	472.6	736.5	1055.3
55,0°	29.9	36.4	45.6	64.2	78.8	91.2	111.3	158.3	238.2	366.9	608.8	990.5	1382.4
57,5°	26.4	33.2	42.1	56.2	65.5	72.4	95.1	156.0	263.2	448.0	777.4	1252.6	1712.6
60,0°	24.7	31.8	39.1	47.7	48.9	51.7	77.0	142.7	275.1	520.5	884.1	1384.8	1887.5
62,5°	23.9	29.7	35.4	38.9	34.8	37.6	60.5	121.7	256.3	497.9	841.5	1324.2	1876.0
65,0°	20.0	24.7	30.4	33.6	26.6	27.4	47.5	97.4	195.0	387.8	667.7	1054.4	1586.9
67,5°	15.3	20.0	25.2	23.9	17.3	18.9	30.0	58.8	119.5	239.3	427.2	690.4	1052.9
70,0°	10.8	15.1	19.9	16.4	11.8	10.8	15.6	32.7	72.2	146.6	268.8	415.2	555.3
72,5°	7.1	10.6	13.8	9.8	6.8	6.6	9.5	18.7	41.9	83.9	143.4	210.1	267.5
75,0°	4.2	6.7	6.9	5.1	3.9	4.4	6.7	10.9	21.3	43.9	73.5	88.1	92.5
77,5°	2.7	4.3	3.1	2.5	2.1	2.6	4.1	6.5	11.6	10.8	10.2	10.4	11.7
80,0°	1.3	1.9	1.3	1.0	0.9	1.4	2.5	3.2	3.6	3.8	4.0	4.6	6.1
82,5°	0.5	0.6	0.5	0.4	0.4	0.8	1.3	1.5	1.6	1.8	2.0	2.3	2.9
85,0°	0.4	0.4	0.4	0.3	0.2	0.4	0.6	0.7	0.7	0.8	0.9	1.0	1.1
87,5°	0.2	0.2	0.2	0.1	0.1	0.1	0.2	0.2	0.3	0.3	0.4	0.4	0.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Lichttechnischer Prüfbefund

Familie Floodlight FL11					Bestell-Nr.: 5XA779615X01AB EAN: 4069025142344							LP-Nummer 59552_105		
Wertetabelle Lichtstärkemessung												Maximale Lichtstärke		siteco
C- Ebenen	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°	
γ	Lichtstärke in cd/klm													
0,0°	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	
2,5°	109.3	109.9	110.5	111.0	111.2	111.3	93.3	92.6	91.8	91.1	90.5	89.8	89.3	
5,0°	132.1	134.7	136.4	137.8	138.8	139.3	90.5	89.0	87.5	86.2	85.0	84.0	82.9	
7,5°	158.8	163.8	167.5	170.6	172.4	173.0	86.8	84.6	82.7	81.0	79.2	77.4	75.6	
10,0°	191.1	199.5	206.7	212.1	215.3	216.1	82.0	79.5	77.1	74.6	72.2	69.6	66.7	
12,5°	228.1	239.7	249.1	255.9	259.8	261.6	77.7	74.9	71.9	68.8	65.5	61.3	55.2	
15,0°	258.2	272.7	286.2	297.9	310.0	308.4	74.9	71.2	67.1	63.1	57.8	50.4	42.5	
17,5°	289.6	311.9	333.0	351.5	364.1	368.7	73.0	68.0	62.9	57.3	49.3	40.4	32.1	
20,0°	330.2	356.3	375.0	388.5	395.9	398.0	69.9	63.4	56.9	49.1	39.9	30.8	24.7	
22,5°	366.7	382.4	385.6	381.7	376.1	372.4	65.2	57.4	49.0	39.6	31.0	24.2	20.9	
25,0°	381.5	385.8	377.8	364.8	353.0	347.6	59.3	50.2	39.7	30.3	24.2	20.2	12.5	
27,5°	378.0	385.2	381.5	374.3	367.8	366.1	54.0	43.5	31.6	24.0	20.5	13.5	10.4	
30,0°	366.9	393.0	405.7	407.0	407.2	408.3	49.9	38.4	25.1	20.4	16.8	10.8	9.6	
32,5°	374.5	415.0	442.0	451.1	453.3	456.5	46.8	34.3	20.9	18.2	12.4	9.9	8.8	
35,0°	398.7	441.7	472.8	485.0	487.9	490.9	44.1	30.6	18.4	16.2	11.0	9.3	7.9	
37,5°	428.7	463.9	492.4	505.1	507.0	508.7	41.7	27.4	16.7	13.2	10.3	8.3	7.2	
40,0°	454.1	493.9	515.9	532.4	536.8	537.9	38.9	24.3	15.6	11.9	9.5	7.4	6.8	
42,5°	489.2	550.5	586.8	619.0	623.4	622.3	35.5	20.4	14.0	11.4	8.8	7.1	6.6	
45,0°	576.4	669.3	735.8	795.0	792.8	786.0	32.2	16.7	12.3	11.3	8.4	6.6	6.1	
47,5°	733.6	852.2	946.3	1030.3	1010.7	986.2	29.1	14.5	12.0	11.0	7.9	5.9	5.3	
50,0°	969.9	1092.1	1200.2	1308.1	1257.4	1205.0	26.9	14.0	12.7	11.1	7.6	5.2	4.6	
52,5°	1245.8	1343.3	1437.7	1558.8	1471.9	1385.3	24.6	14.9	13.8	10.9	7.1	4.4	4.1	
55,0°	1577.6	1596.0	1633.0	1740.5	1624.7	1504.5	22.4	14.8	12.9	10.2	5.4	3.9	3.7	
57,5°	1901.9	1825.5	1779.0	1854.7	1733.5	1597.4	20.0	14.4	11.6	8.8	4.0	3.5	3.4	
60,0°	2022.8	1938.6	1839.7	1881.0	1753.9	1613.4	18.1	14.8	10.3	6.6	3.5	3.2	3.0	
62,5°	1861.2	1678.3	1551.2	1598.4	1499.9	1383.8	16.1	14.5	8.7	4.0	3.1	2.8	2.6	
65,0°	1528.6	1268.7	1152.1	1165.0	1093.8	1008.1	13.1	13.4	6.7	3.1	2.6	2.3	2.2	
67,5°	1045.8	751.9	631.8	585.7	520.1	465.0	9.9	10.0	3.9	2.4	2.0	1.9	2.1	
70,0°	540.3	336.9	231.7	193.6	156.7	132.9	7.1	6.6	2.5	1.8	1.6	1.6	1.9	
72,5°	188.4	85.8	58.9	49.2	41.0	36.1	4.3	3.3	1.9	1.4	1.3	1.4	1.7	
75,0°	40.5	29.7	31.6	30.9	24.4	21.3	2.4	2.0	1.3	1.1	1.1	1.2	1.4	
77,5°	15.4	17.6	18.3	19.8	14.5	12.2	1.5	1.2	0.9	0.8	0.8	0.9	1.2	
80,0°	8.9	9.5	9.4	11.9	8.5	7.0	0.8	0.7	0.5	0.5	0.5	0.7	0.9	
82,5°	3.8	4.3	4.1	5.6	4.2	3.3	0.4	0.4	0.3	0.3	0.3	0.5	0.7	
85,0°	1.4	1.4	1.3	1.6	1.4	1.2	0.3	0.3	0.2	0.2	0.3	0.3	0.4	
87,5°	0.4	0.4	0.4	0.4	0.4	0.4	0.2	0.2	0.1	0.1	0.1	0.2	0.2	
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	

Lichttechnischer Prüfbefund

Familie Floodlight FL11				Bestell-Nr.: 5XA779615X01AB EAN: 4069025142344								LP-Nummer 59552_105	
Wertetabelle Lichtstärkemessung												siteco	
C- Ebenen	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-Zone	Summe Phi-Zone
γ	Lichtstärke in cd/klm											Lichtstrom in lm/klm	
0,0°	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	0.1	0.1
2,5°	88.8	88.4	87.9	87.7	87.4	87.2	87.1	86.9	86.8	86.8	86.7	1.2	1.3
5,0°	82.0	81.1	80.2	79.5	78.7	78.0	77.4	77.0	76.7	76.5	76.4	2.4	3.7
7,5°	73.7	71.9	69.7	67.6	65.2	62.9	60.8	59.3	58.0	57.3	57.0	3.7	7.4
10,0°	62.9	58.0	52.9	48.1	43.7	40.2	37.5	35.4	34.0	33.2	32.9	5.0	12.3
12,5°	48.5	41.5	35.6	30.9	27.6	25.6	24.4	23.7	23.3	23.2	23.1	6.5	18.8
15,0°	35.0	29.2	25.3	23.6	22.8	21.8	19.4	16.8	14.8	13.7	13.9	8.3	27.1
17,5°	26.3	23.7	22.1	17.2	13.0	11.5	10.9	10.6	10.3	10.2	10.2	10.3	37.4
20,0°	22.3	16.7	11.8	10.7	10.2	9.8	9.5	9.3	9.1	9.1	9.0	12.4	49.8
22,5°	13.5	10.8	10.0	9.5	9.1	8.9	8.6	8.4	8.3	8.2	8.2	14.4	64.2
25,0°	10.4	9.6	9.0	8.6	8.3	8.1	7.9	7.8	7.7	7.6	7.6	16.0	80.2
27,5°	9.5	8.7	8.2	7.9	7.6	7.5	7.4	7.3	7.2	7.2	7.1	17.7	97.9
30,0°	8.7	8.0	7.6	7.3	7.1	7.0	6.9	6.8	6.8	6.7	6.7	19.6	117.4
32,5°	7.8	7.4	7.0	6.8	6.6	6.5	6.3	6.2	6.1	6.0	6.0	21.9	139.4
35,0°	7.2	6.9	6.6	6.3	6.1	5.9	5.8	5.6	5.5	5.5	5.5	24.4	163.8
37,5°	6.8	6.4	6.1	5.8	5.5	5.4	5.3	5.2	5.1	5.0	5.0	26.5	190.2
40,0°	6.4	6.0	5.6	5.3	5.2	5.1	5.0	5.0	4.9	4.8	4.8	28.6	218.8
42,5°	6.1	5.7	5.4	5.1	4.9	5.0	4.9	4.8	4.6	4.5	4.5	31.9	250.7
45,0°	5.6	5.2	5.0	4.8	4.7	4.8	4.7	4.5	4.4	4.3	4.2	37.7	288.5
47,5°	5.0	4.7	4.5	4.4	4.4	4.4	4.4	4.3	4.2	4.2	4.1	45.9	334.4
50,0°	4.4	4.3	4.2	4.1	4.1	4.2	4.2	4.2	4.1	4.1	4.1	56.8	391.1
52,5°	4.0	4.0	3.9	3.9	4.0	4.0	4.0	4.0	4.0	4.0	4.0	69.1	460.2
55,0°	3.6	3.6	3.8	3.8	3.9	3.9	3.9	3.9	4.0	4.0	3.9	82.6	542.8
57,5°	3.2	3.4	3.6	3.8	3.8	3.8	3.9	3.9	3.9	3.9	3.9	96.3	639.1
60,0°	2.9	3.1	3.5	3.7	3.8	3.8	3.8	3.8	3.8	3.8	3.7	103.9	743.1
62,5°	2.6	3.0	3.4	3.5	3.7	3.7	3.6	3.6	3.6	3.6	3.6	95.6	838.6
65,0°	2.5	3.0	3.3	3.4	3.5	3.5	3.4	3.4	3.4	3.4	3.4	75.8	914.5
67,5°	2.4	2.8	3.0	3.1	3.2	3.2	3.2	3.2	3.2	3.2	3.2	46.2	960.7
70,0°	2.2	2.5	2.7	2.9	3.0	3.0	3.0	3.0	2.9	2.9	2.9	22.7	983.4
72,5°	2.0	2.3	2.5	2.7	2.9	2.7	2.6	2.6	2.6	2.5	2.5	9.5	992.9
75,0°	1.7	2.0	2.2	2.3	2.3	2.3	2.2	2.2	2.2	2.1	2.1	4.2	997.1
77,5°	1.4	1.6	1.7	1.7	1.8	1.8	1.8	1.8	1.8	1.7	1.7	1.5	998.6
80,0°	1.1	1.2	1.3	1.3	1.3	1.4	1.4	1.4	1.4	1.4	1.3	0.8	999.4
82,5°	0.8	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.4	999.8
85,0°	0.5	0.5	0.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.2	999.9
87,5°	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Lichttechnischer Prüfbefund

Familie Floodlight FL11	Bestell-Nr.: 5XA779615X01AB EAN: 4069025142344	LP-Nummer 59552_105
Dimmstufen-Tabelle Umgebungstemperatur: 0°C		

Lichtstrom [%]	Dimmstufe linear	Dimmstufe logarithmisch	Lichtstrom [lm]	Systemleistung [W]
100	----	----	----	----
99	251	254	110402	1069.8
95	237	251	105666	1010.0
90	221	249	100100	941.7
85	206	246	94622	877.9
80	191	244	88913	814.5
75	177	241	83431	755.1
70	164	238	78144	700.8
65	150	235	72496	642.2
60	136	231	66619	584.1
55	124	228	61402	534.2
50	111	224	55599	480.6
45	99	219	50107	431.2
40	87	215	44510	382.0
35	75	209	38758	333.1
30	64	204	33216	288.6
25	53	197	27743	244.3
20	42	188	22145	201.1
15	31	177	16522	153.1
10	21	163	11330	107.9
5	10	136	5447	58.5
1	3	91	1528	28.7

Dimmstufen-Tabelle	Umgebungstemperatur: 25°C
---------------------------	---------------------------

Lichtstrom [%]	Dimmstufe linear	Dimmstufe logarithmisch	Lichtstrom [lm]	Systemleistung [W]
100	----	----	----	----
95	----	----	----	----
90	----	----	----	----
85	----	----	----	----
80	----	----	----	----
75	----	----	----	----
74	170	239	77472	717.2
70	160	237	73701	675.7
65	146	234	68362	617.9
60	133	230	63200	564.2
55	120	227	57893	510.9
50	108	223	52859	461.7
45	96	219	47543	413.1
40	84	214	42121	364.3
35	73	208	37027	320.3
30	62	202	31706	276.4
25	51	195	26343	232.7
20	40	186	20892	190.1
15	30	176	15894	145.5
10	20	161	10721	102.2
5	10	136	5427	57.5
1	3	92	1526	28.2

Lichttechnischer Prüfbefund

Familie Floodlight FL11	Bestell-Nr.: 5XA779615X01AB EAN: 4069025142344	LP-Nummer 59552_105
Lichtstrom-Tabelle		siteco

Temperatur °C	Lichtstrom lm	Systemleistung W
0.0	111350.0	1082.7
25.0	78200.0	725.2