

Lichttechnischer Prüfbefund

Familie Silica® 21	Bestell-Nr.: 51MX20DB32BB EAN: 4058352898628	LP-Nummer 60289_13
Wertetabelle Lichtstärkemessung	Maximale Lichtstärke	siteco

C- Ebenen	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-Zone	Summe Phi-Zone
γ	Lichtstärke in cd/klm							Lichtstrom in lm/klm	
0,0°	354.8	354.8	354.8	354.8	354.8	354.8	354.8	0.5	0.5
2,5°	356.1	354.8	352.5	354.0	355.5	355.5	355.7	4.2	4.8
5,0°	354.8	353.6	351.3	352.8	354.4	354.3	354.5	8.4	13.2
7,5°	352.6	351.6	349.3	350.8	352.4	352.4	352.6	12.6	25.8
10,0°	349.6	348.7	346.4	347.9	349.6	349.5	349.8	16.6	42.4
12,5°	345.9	345.1	342.8	344.3	346.0	346.1	346.3	20.5	62.9
15,0°	341.1	340.5	338.2	339.7	341.5	341.5	341.8	24.2	87.0
17,5°	335.7	335.3	333.0	334.5	336.3	336.5	336.8	27.6	114.7
20,0°	329.7	329.5	327.3	328.8	330.6	330.8	331.2	30.9	145.6
22,5°	322.7	322.7	320.5	321.8	323.8	324.1	324.6	33.9	179.4
25,0°	315.2	315.4	313.2	314.5	316.5	316.9	317.4	36.5	216.0
27,5°	306.8	307.2	305.0	306.3	308.3	308.8	309.3	38.9	254.9
30,0°	298.1	298.7	296.7	297.9	300.0	300.4	301.1	41.0	295.8
32,5°	288.4	289.2	287.3	288.3	290.3	291.0	291.7	42.6	338.5
35,0°	278.3	279.3	277.6	278.6	280.5	281.2	282.0	44.0	382.4
37,5°	267.6	268.7	267.4	268.1	269.9	270.9	271.7	44.9	427.3
40,0°	256.7	257.8	256.8	257.2	259.2	260.2	261.2	45.5	472.8
42,5°	245.1	246.2	245.5	245.9	247.7	248.9	250.2	45.7	518.6
45,0°	232.6	233.7	233.4	233.7	235.5	236.5	238.2	45.5	564.1
47,5°	220.2	221.3	221.5	221.8	223.4	224.3	226.1	45.0	609.1
50,0°	206.9	207.8	208.6	208.9	210.4	211.2	213.1	44.0	653.1
52,5°	193.6	194.4	195.5	195.9	197.4	198.1	200.0	42.7	695.8
55,0°	179.3	180.3	181.6	182.1	183.6	184.1	186.0	41.0	736.7
57,5°	165.5	166.5	167.9	168.6	170.2	170.7	172.6	39.0	775.8
60,0°	150.7	151.9	153.3	154.2	155.7	156.4	157.9	36.6	812.4
62,5°	136.1	137.6	139.1	140.1	141.6	142.5	143.6	34.1	846.5
65,0°	121.4	123.0	124.5	125.7	127.6	128.3	129.2	31.2	877.7
67,5°	105.8	107.6	108.8	110.4	112.5	113.4	114.1	28.0	905.7
70,0°	90.4	92.3	93.2	95.3	97.3	98.6	99.1	24.5	930.2
72,5°	74.6	76.3	77.1	79.6	81.4	83.0	83.4	20.8	951.0
75,0°	59.7	61.0	61.9	64.2	66.4	67.9	68.3	17.0	968.0
77,5°	44.5	45.5	46.7	48.5	50.7	52.4	53.0	13.0	981.0
80,0°	30.9	31.6	32.8	34.2	36.1	37.8	38.5	9.3	990.3
82,5°	18.3	18.8	19.8	20.9	22.6	24.0	24.6	5.8	996.1
85,0°	8.6	8.8	9.5	10.4	11.4	12.6	13.2	2.9	999.0
87,5°	2.4	2.6	2.9	3.4	4.1	4.7	5.1	1.0	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Lichttechnischer Prüfbefund


Familie Silica® 21			Bestell-Nr.: 51MX20DB32BB EAN: 4058352898628						LP-Nummer 60289_13		
UGR-Tabelle			Standardraum						siteco		
Reflexionsgrad Decke		0,7	0,7	0,5	0,5	0,3	0,7	0,7	0,5	0,5	0,3
Reflexionsgrad Wände		0,5	0,3	0,5	0,3	0,3	0,5	0,3	0,5	0,3	0,3
Reflexionsgrad Boden		0,2	0,2	0,2	0,2	0,2	0,2	0,2	0,2	0,2	0,2
Raumabmessungen		Blickrichtung quer zur Leuchte (C0)					Blickrichtung längs zur Leuchte (C90)				
x	y										
2H	2H	21,2	22,8	21,5	23,2	23,5	21,3	23,0	21,7	23,3	23,6
	3H	22,7	24,2	23,1	24,6	24,9	23,0	24,5	23,4	24,8	25,2
	4H	23,3	24,7	23,7	25,0	25,4	23,6	25,1	24,0	25,4	25,8
	6H	23,6	24,9	24,0	25,3	25,7	24,1	25,4	24,5	25,8	26,2
	8H	23,7	25,0	24,1	25,3	25,7	24,2	25,5	24,7	25,9	26,3
	12H	23,7	24,9	24,2	25,3	25,7	24,3	25,5	24,7	25,9	26,3
4H	2H	21,9	23,4	22,3	23,7	24,1	22,1	23,5	22,5	23,9	24,2
	3H	23,7	24,9	24,1	25,3	25,7	23,9	25,1	24,3	25,5	25,9
	4H	24,3	25,4	24,8	25,8	26,3	24,7	25,8	25,1	26,2	26,6
	6H	24,8	25,7	25,2	26,1	26,6	25,2	26,2	25,7	26,6	27,1
	8H	24,9	25,7	25,3	26,2	26,7	25,4	26,3	25,9	26,7	27,2
	12H	24,9	25,7	25,4	26,2	26,7	25,5	26,3	26,0	26,7	27,2
8H	4H	24,7	25,5	25,1	26,0	26,4	25,0	25,8	25,4	26,3	26,7
	6H	25,2	25,9	25,7	26,4	26,9	25,6	26,3	26,1	26,8	27,3
	8H	25,3	26,0	25,8	26,4	27,0	25,8	26,5	26,3	26,9	27,5
	12H	25,4	25,9	25,9	26,4	27,0	26,0	26,5	26,5	27,0	27,5
12H	4H	24,7	25,5	25,2	25,9	26,4	25,0	25,8	25,5	26,2	26,7
	6H	25,3	25,9	25,8	26,4	26,9	25,7	26,3	26,2	26,8	27,3
	8H	25,4	26,0	25,9	26,4	27,0	25,9	26,4	26,4	26,9	27,5

Leuchtdichten-Tabelle		Max. für $\gamma \geq 65^\circ$		Lichttechnische Abmessungen in mm:		L = 1500 B = 50	
C- Ebenen	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Leuchtdichte in cd/m²						
45,0°	13160.1	13222.6	13203.5	13219.7	13323.3	13379.9	13476.2
50,0°	12877.6	12934.2	12979.5	13000.5	13092.7	13144.4	13262.5
55,0°	12506.8	12573.9	12661.7	12698.0	12802.2	12841.2	12974.4
60,0°	12052.0	12151.8	12263.0	12334.7	12457.4	12509.4	12634.1
65,0°	11491.6	11642.8	11786.7	11895.0	12077.0	12141.0	12231.9
70,0°	10576.8	10798.7	10901.9	11143.6	11385.2	11526.6	11585.8
75,0°	9225.4	9420.3	9562.8	9920.3	10261.7	10492.7	10555.0
80,0°	7111.6	7282.3	7551.8	7875.0	8326.7	8713.0	8865.5
85,0°	3924.0	4055.3	4347.2	4770.8	5242.1	5790.6	6058.6

Lichttechnischer Prüfbefund

Familie Silica® 21	Bestell-Nr.: 51MX20DB32BB EAN: 4058352898628	LP-Nummer 60289_13
Leuchtdichten in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85°		

siteco

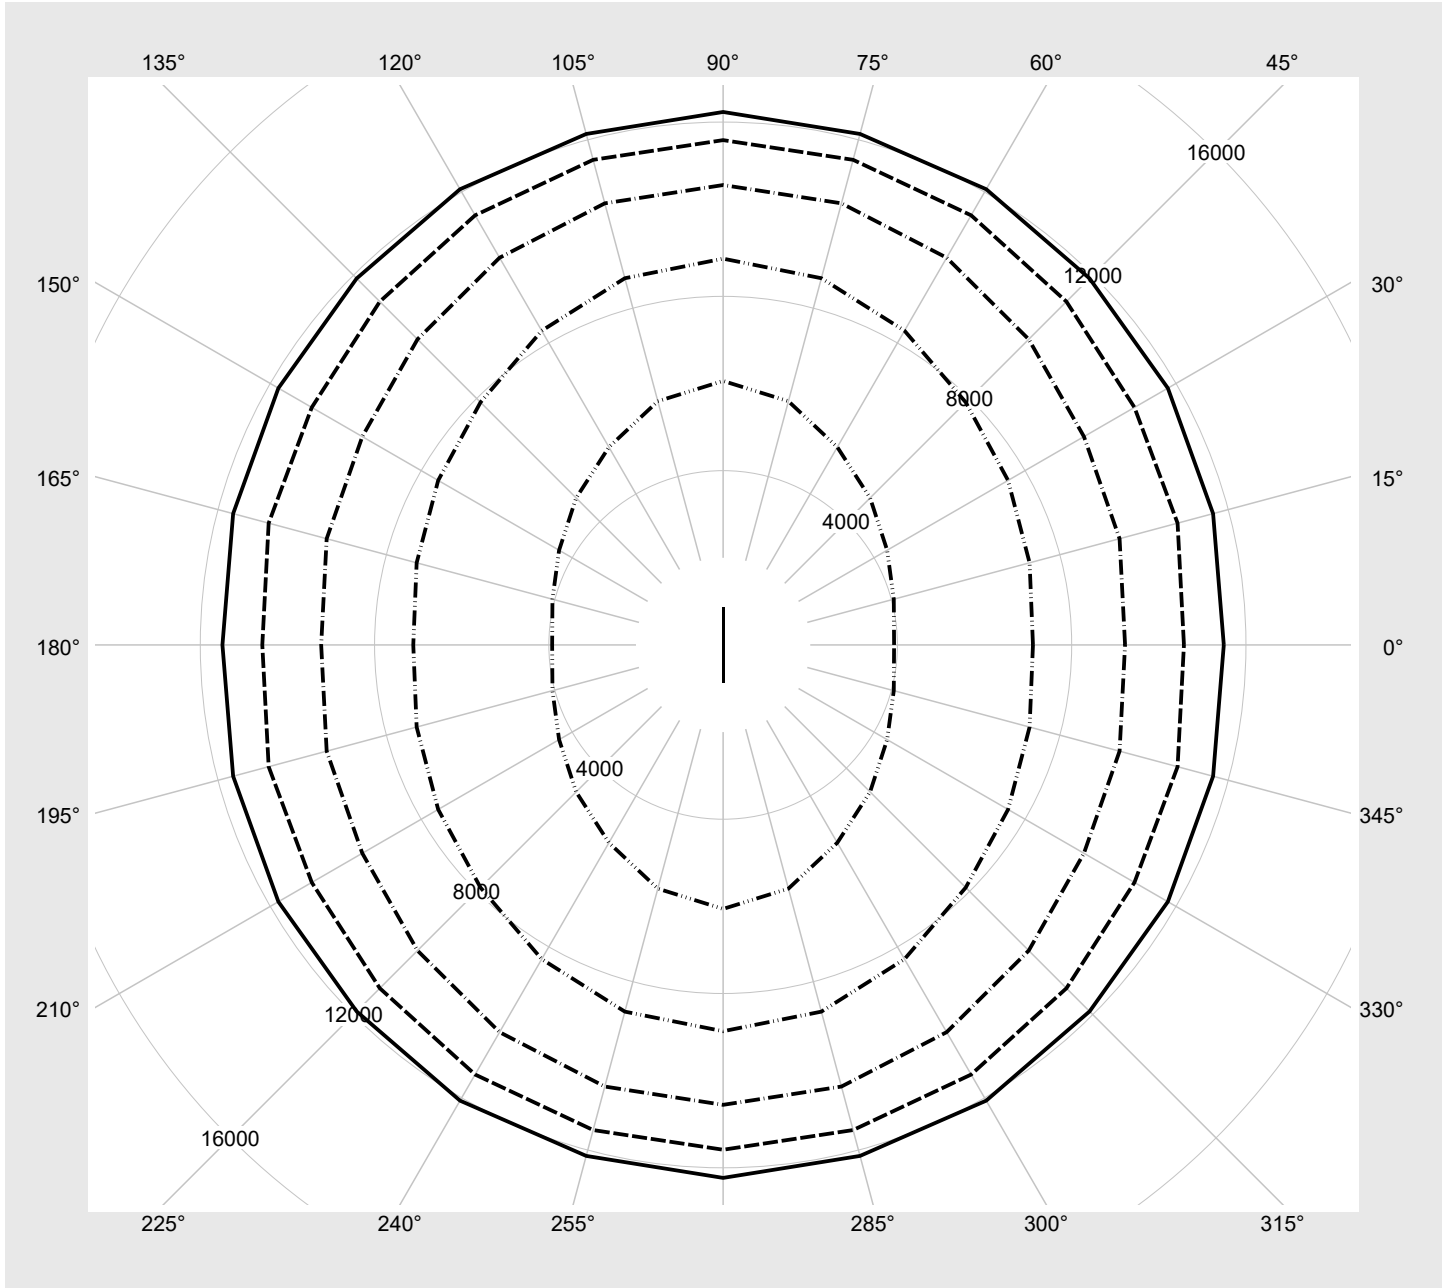

Lichttechnischer Prüfbefund

Familie
Silica® 21

Bestell-Nr.: 51MX20DB32BB
EAN: 4058352898628

LP-Nummer
60289_13

Dimmstufen-Tabelle

Umgebungstemperatur: 25°C

siteco

Lichtstrom [%]	Dimmstufe linear	Dimmstufe logarithmisch	Lichtstrom [lm]	Systemleistung [W]
100	254	254	3000	20.2
95	241	252	2851	19.2
90	228	250	2701	18.2
85	215	248	2551	17.1
80	202	246	2401	16.1
75	189	243	2250	15.1
70	176	241	2098	14.1
65	163	238	1946	13.1
60	151	235	1805	12.2
55	138	232	1651	11.2
50	125	228	1497	10.2
45	113	224	1355	9.4
40	100	220	1200	8.5
35	87	215	1044	7.5
30	75	209	901	6.6
25	63	203	755	5.7
20	50	194	598	4.8
15	38	184	453	3.9
10	25	169	295	2.9
5	13	145	148	1.6