

Photometric test report

Family
Apollon® 21

Order number: 51MQ17WD2412
EAN: 4058352490754

LP number
59193_3



Version recessed luminaire for lay-in mounting, linear, wide distribution

Lamps LED 4000 K | CRI ≥ 80

Controlgear ECG-DALI

Rated values Net luminous flux = 7200 lm
Power consumption = 60.0 W
Luminous efficacy = 120 lm/W

serial
documentation
30.07.2021


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 441 cd/klm

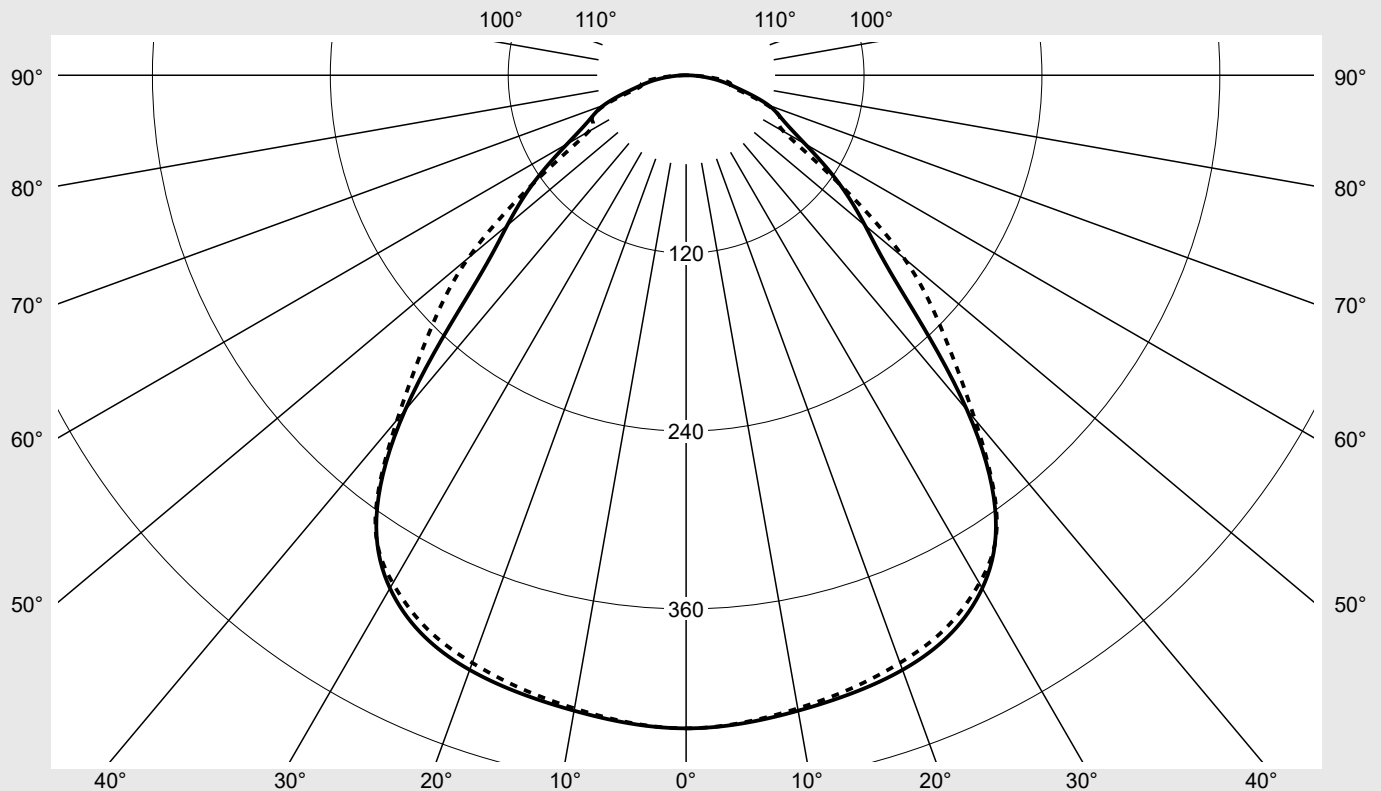

Classifications

DIN 5040 A 5 0
CIE N1=61 N2=87 N3=97
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Apollon® 21	Order number: 51MQ17WD2412 EAN: 4058352490754	LP number 59193_3
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	440.5	440.5	440.5	440.5	440.5	440.5	440.5	2.6	2.6
5°	438.8	438.8	438.6	438.5	438.5	438.3	438.3	21.0	23.6
10°	435.2	435.1	434.7	434.4	434.1	433.8	433.7	41.3	64.9
15°	431.6	431.4	430.4	429.9	429.6	429.0	428.4	61.0	125.9
20°	426.8	426.3	425.0	424.1	423.4	422.6	421.8	79.5	205.5
25°	417.7	417.7	416.7	414.8	413.3	412.5	412.4	96.1	301.6
30°	399.5	400.5	401.0	397.6	394.4	394.6	395.6	109.0	410.6
35°	364.2	367.4	370.3	365.2	360.1	362.1	365.4	114.8	525.4
40°	294.8	297.9	307.7	297.1	292.2	294.7	303.1	105.0	630.4
45°	205.1	222.7	247.3	222.6	200.5	217.8	244.8	86.3	716.7
50°	157.5	177.3	190.7	176.7	153.0	173.1	191.8	73.2	789.8
55°	124.7	136.0	121.5	132.7	125.1	133.7	122.3	57.8	847.6
60°	92.7	98.6	77.8	97.8	93.3	98.2	76.0	43.5	891.2
65°	72.5	74.6	71.4	73.3	71.5	72.7	70.1	36.0	927.2
70°	59.2	55.7	56.1	55.6	60.5	55.5	57.5	29.3	956.5
75°	38.8	40.1	34.7	40.4	39.9	39.1	33.8	20.3	976.8
80°	24.7	28.1	28.6	29.3	23.8	29.2	29.9	15.0	991.8
85°	11.2	14.7	15.9	14.6	10.8	15.0	16.0	7.7	999.5
90°	0.9	1.5	1.3	1.2	0.5	0.6	0.3	0.5	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Apollon® 21	Order number: 51MQ17WD2412 EAN: 4058352490754	LP number 59193_3
------------------------------	--	-----------------------------

UGR-Table	Standard room	siteco	
-----------	---------------	--------	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	16.8	18.4	17.2	18.7	19.0	16.7	18.3	17.1	18.6	18.9
	3H	17.9	19.3	18.2	19.6	19.9	17.7	19.1	18.1	19.5	19.8
	4H	18.3	19.6	18.7	20.0	20.3	18.1	19.5	18.5	19.8	20.2
	6H	18.7	19.9	19.1	20.3	20.7	18.6	19.8	19.0	20.2	20.6
	8H	18.9	20.0	19.3	20.4	20.8	18.9	20.0	19.3	20.4	20.8
	12H	19.0	20.0	19.4	20.4	20.8	19.1	20.1	19.5	20.5	21.0
4H	2H	17.3	18.6	17.7	18.9	19.3	17.2	18.5	17.6	18.8	19.2
	3H	18.5	19.6	18.9	20.0	20.4	18.4	19.5	18.9	19.9	20.3
	4H	19.1	20.0	19.5	20.4	20.9	19.0	20.0	19.4	20.4	20.8
	6H	19.6	20.5	20.1	20.9	21.4	19.6	20.5	20.1	20.9	21.4
	8H	19.8	20.6	20.3	21.1	21.5	19.9	20.7	20.4	21.2	21.6
	12H	20.0	20.7	20.5	21.2	21.7	20.2	20.9	20.7	21.4	21.9
8H	4H	19.3	20.1	19.8	20.5	21.0	19.3	20.0	19.7	20.5	21.0
	6H	20.1	20.7	20.5	21.2	21.7	20.0	20.6	20.5	21.1	21.6
	8H	20.4	21.0	20.9	21.4	22.0	20.4	21.0	20.9	21.4	22.0
	12H	20.7	21.2	21.2	21.7	22.2	20.8	21.2	21.3	21.7	22.3
12H	4H	19.4	20.0	19.9	20.5	21.0	19.3	20.0	19.8	20.5	21.0
	6H	20.2	20.7	20.7	21.2	21.7	20.1	20.7	20.6	21.1	21.7
	8H	20.6	21.0	21.1	21.5	22.1	20.5	21.0	21.0	21.5	22.0

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1498 B = 260
-----------------	---------------------------------	-------------------------------	---------------------

C-planes	γ	0° 180°	15°	30°	45°	60°	75°	90° 270°
			165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°	
Luminance in cd/m²								
45°		5362.4	5822.3	6464.4	5818.8	5241.4	5692.9	6399.2
50°		4530.6	5099.8	5485.6	5081.4	4401.5	4978.6	5516.7
55°		4017.4	4382.9	3915.1	4278.3	4030.6	4307.7	3942.2
60°		3425.7	3646.8	2877.2	3616.1	3447.9	3630.9	2810.6
65°		3170.5	3263.9	3124.5	3206.9	3126.7	3180.1	3068.4
70°		3198.1	3009.2	3031.3	3005.9	3268.5	3001.0	3108.8
75°		2771.7	2861.1	2481.2	2883.3	2846.8	2789.6	2414.7
80°		2625.4	2989.0	3047.7	3124.4	2528.4	3106.3	3186.3
85°		2379.6	3119.0	3367.6	3093.6	2286.1	3172.0	3399.4

Photometric test report

Family Apollon® 21	Order number: 51MQ17WD2412 EAN: 4058352490754	LP number 59193_3
-------------------------------------	--	------------------------------------



Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

