


Photometric test report

Family Spot 21	Order number: 51SE64MBD5B EAN: 4058352769942	LP number 59386_9
Version	reflector, cover panel, PC, wide distribution	serial documentation 14.02.2023
Lamps	LED 4000 K CRI ≥ 90	
Controlgear	ECG Multilumen	
Setting	factory setting: DIP-Step=14	
Rated values	Net luminous flux = 5270 lm Power consumption = 39.5 W Luminous efficacy = 133.4 lm/W	



Luminous intensity in cd/klm C180-0 **Imax: 1760 cd/klm**

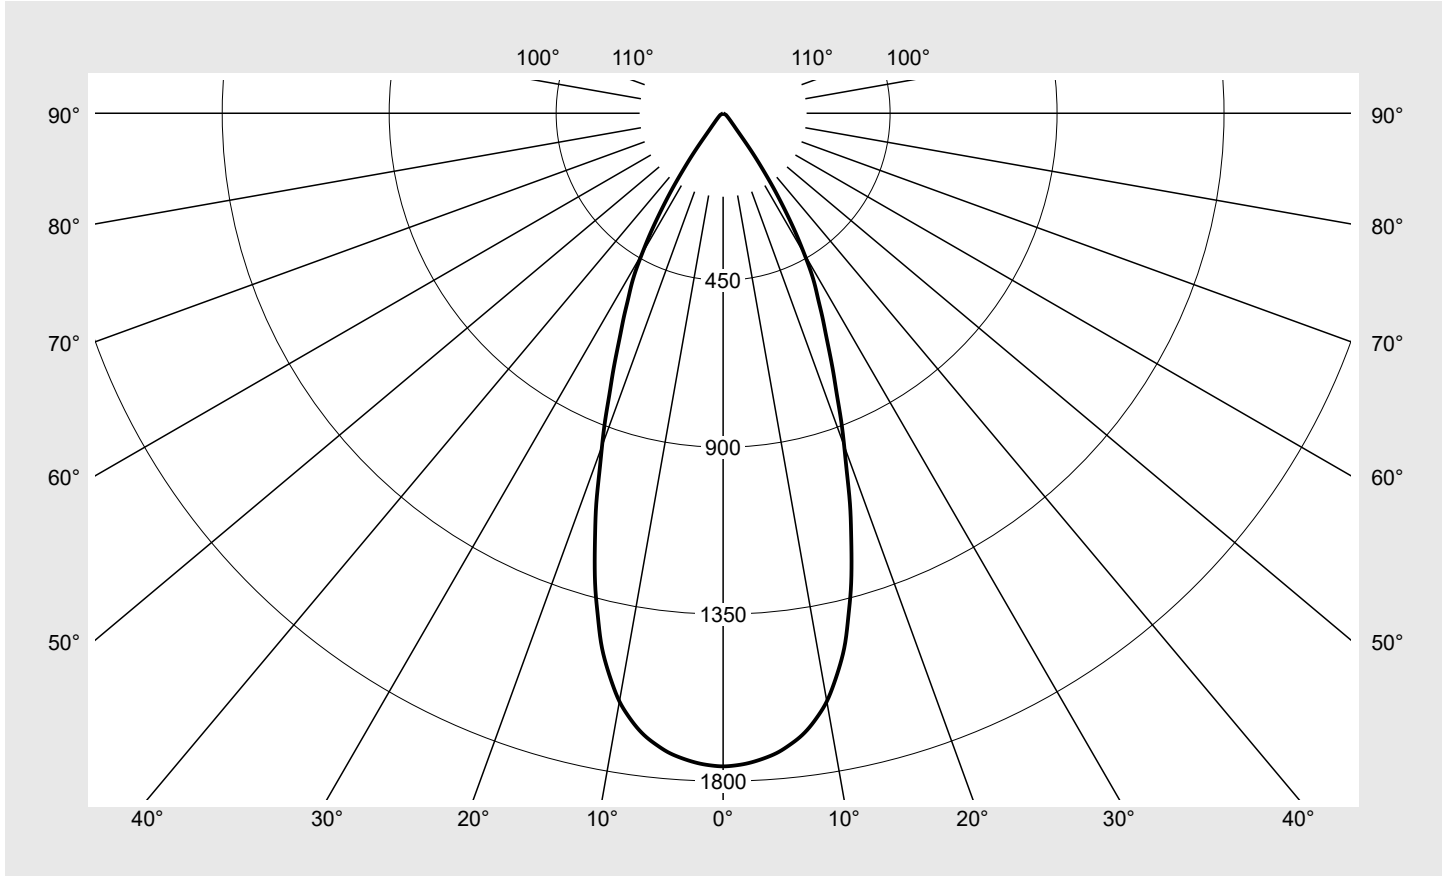

Classifications	
DIN 5040	A 7 0
CIE	N1=96 N2=99 N3=100 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Spot 21	Order number: 51SE64MBD5B EAN: 4058352769942	LP number 59386_9
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	1760.1	0.4	0.4
1°	1758.2	3.4	3.8
2°	1754.1	6.7	10.5
3°	1747.3	10.0	20.5
4°	1738.6	13.3	33.8
5°	1727.5	16.5	50.3
6°	1712.0	19.6	70.0
7°	1694.4	22.6	92.6
8°	1671.3	25.5	118.1
9°	1642.7	28.2	146.3
10°	1609.5	30.6	176.9
11°	1565.8	32.8	209.7
12°	1518.0	34.6	244.3
13°	1463.5	36.1	280.4
14°	1395.9	37.0	317.5
15°	1329.8	37.7	355.2
16°	1255.6	38.0	393.1
17°	1179.7	37.8	431.0
18°	1106.2	37.5	468.5
19°	1025.0	36.6	505.0
20°	954.0	35.8	540.8
21°	887.6	34.9	575.7
22°	818.8	33.6	609.3
23°	761.0	32.6	642.0
24°	704.7	31.4	673.4
25°	653.5	30.3	703.7
26°	609.7	29.3	733.0
27°	565.7	28.2	761.1
28°	528.8	27.2	788.4
29°	487.3	25.9	814.3
30°	436.9	24.0	838.2
31°	388.6	21.9	860.2
32°	338.1	19.6	879.8
33°	288.5	17.2	897.1
34°	242.2	14.9	911.9
35°	194.7	12.2	924.2
36°	154.7	10.0	934.1
37°	117.6	7.8	941.9
38°	85.4	5.8	947.6
39°	64.8	4.5	952.1
40°	52.3	3.7	955.8
41°	44.6	3.2	959.0
42°	38.1	2.8	961.8
43°	33.3	2.5	964.3
44°	29.9	2.3	966.6
45°	26.7	2.1	968.6
46°	24.0	1.9	970.5

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
47°	21.9	1.8	972.3
48°	19.9	1.6	973.9
49°	18.3	1.5	975.4
50°	16.9	1.4	976.9
51°	15.6	1.3	978.2
52°	14.5	1.2	979.4
53°	13.4	1.2	980.6
54°	12.4	1.1	981.7
55°	11.7	1.1	982.8
56°	11.0	1.0	983.8
57°	10.3	1.0	984.7
58°	9.8	0.9	985.6
59°	9.2	0.9	986.5
60°	8.8	0.8	987.3
61°	8.4	0.8	988.1
62°	8.0	0.8	988.9
63°	7.6	0.7	989.6
64°	7.3	0.7	990.4
65°	7.0	0.7	991.0
66°	6.7	0.7	991.7
67°	6.4	0.6	992.4
68°	6.1	0.6	993.0
69°	5.9	0.6	993.6
70°	5.6	0.6	994.2
71°	5.4	0.6	994.7
72°	5.2	0.5	995.3
73°	4.9	0.5	995.8
74°	4.7	0.5	996.3
75°	4.5	0.5	996.8
76°	4.2	0.4	997.2
77°	4.0	0.4	997.6
78°	3.8	0.4	998.0
79°	3.5	0.4	998.4
80°	3.2	0.3	998.8
81°	2.9	0.3	999.1
82°	2.5	0.3	999.3
83°	2.0	0.2	999.6
84°	1.6	0.2	999.7
85°	1.1	0.1	999.9
86°	0.8	0.1	999.9
87°	0.4	0.0	1000.0
88°	0.1	0.0	1000.0
89°	0.0	0.0	1000.0
90°	0.0	0.0	1000.0

Photometric test report

Family Spot 21	Order number: 51SE64MBD5B EAN: 4058352769942	LP number 59386_9
-------------------	---	----------------------

UGR-Table	Standard room	sitEco
-----------	---------------	--------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	21.6	22.7	22.0	23.0	23.4	21.6	22.7	22.0	23.0	23.4
	3H	21.7	22.6	22.1	23.0	23.3	21.7	22.6	22.1	23.0	23.3
	4H	21.7	22.6	22.1	23.0	23.3	21.7	22.6	22.1	23.0	23.3
	6H	21.9	22.6	22.3	23.0	23.4	21.9	22.6	22.3	23.0	23.4
	8H	22.0	22.6	22.4	23.0	23.4	22.0	22.6	22.4	23.0	23.4
	12H	22.0	22.6	22.5	23.0	23.4	22.0	22.6	22.5	23.0	23.4
4H	2H	21.5	22.4	21.9	22.7	23.1	21.5	22.4	21.9	22.7	23.1
	3H	21.6	22.3	22.0	22.7	23.1	21.6	22.3	22.0	22.7	23.1
	4H	21.7	22.4	22.2	22.8	23.2	21.7	22.4	22.2	22.8	23.2
	6H	21.9	22.4	22.4	22.9	23.4	21.9	22.4	22.4	22.9	23.4
	8H	22.0	22.5	22.5	22.9	23.4	22.0	22.5	22.5	22.9	23.4
	12H	22.1	22.4	22.6	22.9	23.4	22.1	22.4	22.6	22.9	23.4
8H	4H	21.7	22.2	22.2	22.6	23.1	21.7	22.2	22.2	22.6	23.1
	6H	22.0	22.4	22.5	22.8	23.4	22.0	22.4	22.5	22.8	23.4
	8H	22.1	22.4	22.6	22.9	23.4	22.1	22.4	22.6	22.9	23.4
	12H	22.2	22.4	22.7	22.9	23.5	22.2	22.4	22.7	22.9	23.5
12H	4H	21.8	22.1	22.3	22.6	23.1	21.8	22.1	22.3	22.6	23.1
	6H	22.0	22.3	22.5	22.8	23.3	22.0	22.3	22.5	22.8	23.3
	8H	22.1	22.4	22.7	22.9	23.4	22.1	22.4	22.7	22.9	23.4

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 79
-----------------	---------------------------------	--------------------------------------

C-planes	0°
γ	Luminance in cd/m ²
45°	40558.9
50°	28192.1
55°	21957.4
60°	18894.6
65°	17731.7
70°	17682.2
75°	18502.1
80°	19812.8
85°	13964.2


Photometric test report

Family Spot 21	Order number: 51SE64MBD5B EAN: 4058352769942	LP number 59386_9
---------------------------------	---	------------------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

siteco

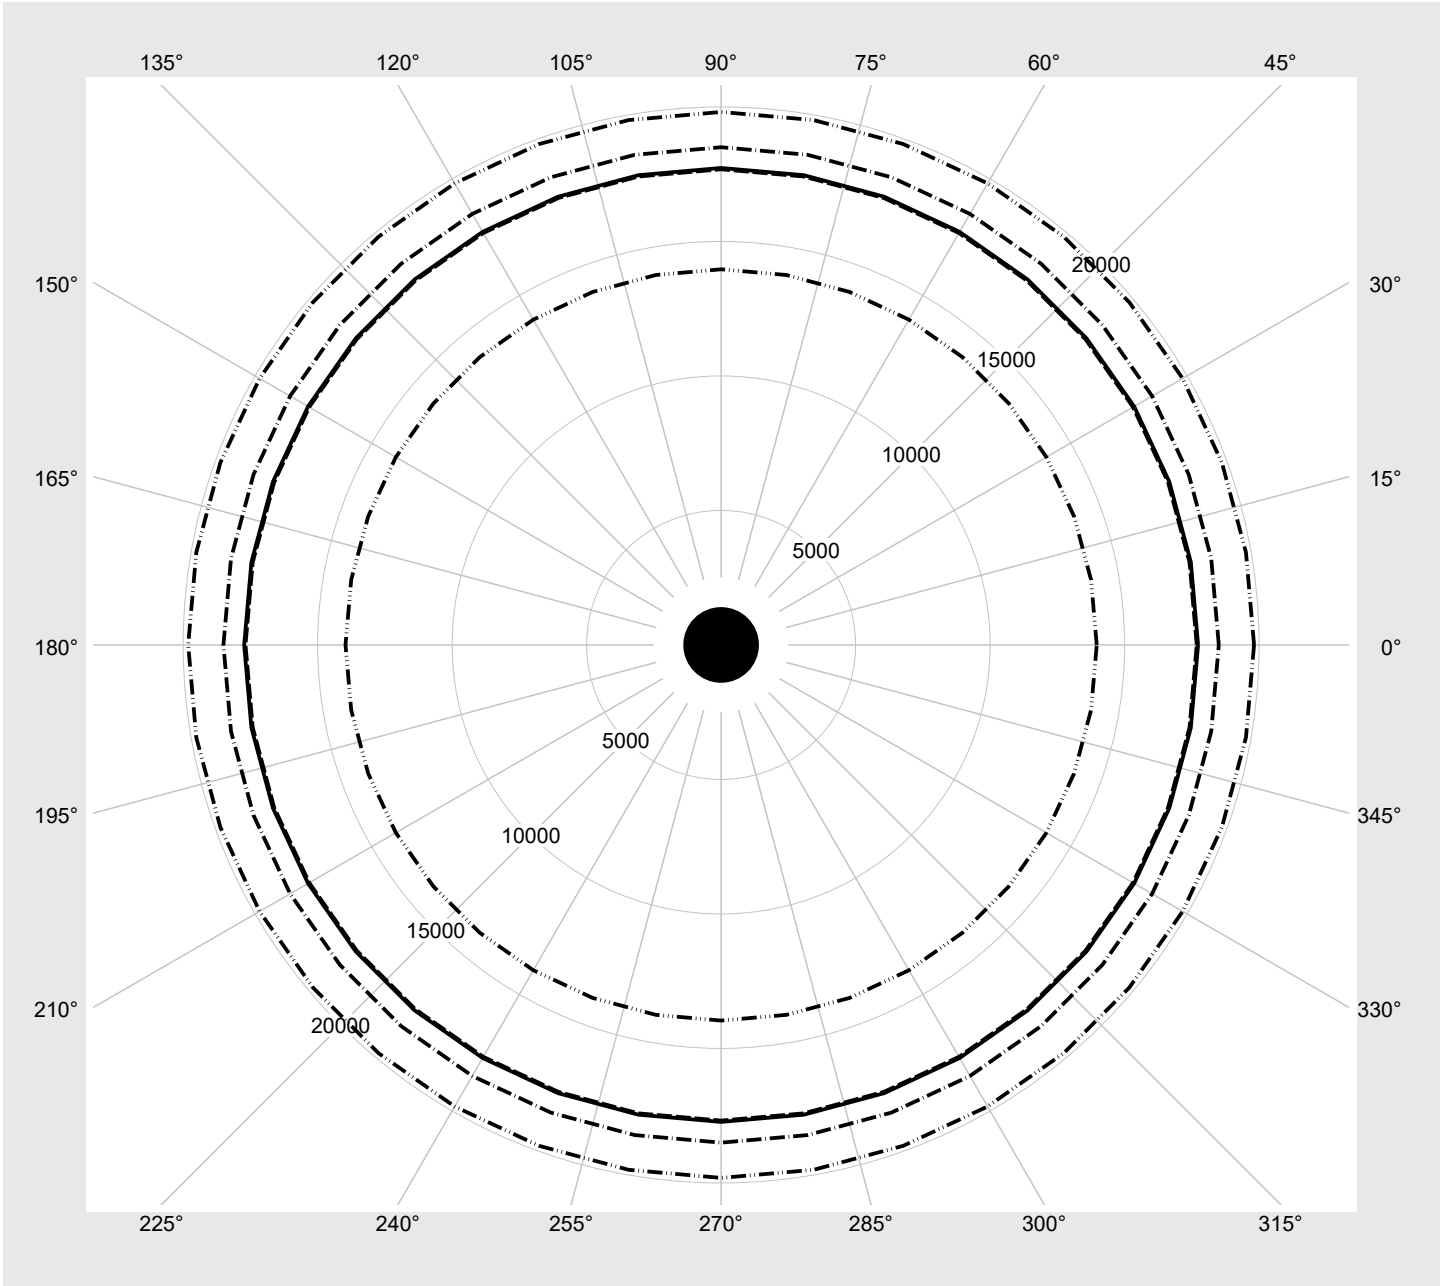

Photometric test report

Family Spot 21	Order number: 51SE64MBD5B EAN: 4058352769942	LP number 59386_9
--------------------------	---	-----------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting				Luminous flux [lm]	Power consumption [W]
	1	2	3	4		
15	ON	ON	ON	ON	5490	41.5
14	ON	ON	ON	OFF	5270	39.5
13	ON	ON	OFF	ON	5060	37.5
12	ON	ON	OFF	OFF	4840	35.5
11	ON	OFF	ON	ON	4580	33.4
10	ON	OFF	ON	OFF	4350	31.4
9	ON	OFF	OFF	ON	4100	29.4
8	ON	OFF	OFF	OFF	3850	27.3
7	OFF	ON	ON	ON	3650	25.8
6	OFF	ON	ON	OFF	3400	23.9
5	OFF	ON	OFF	ON	3140	21.9
4	OFF	ON	OFF	OFF	2890	20.0
3	OFF	OFF	ON	ON	2570	17.8
2	OFF	OFF	ON	OFF	2310	15.9
1	OFF	OFF	OFF	ON	2020	13.8
0	OFF	OFF	OFF	OFF	1740	12.0