

# Photometric test report


<b>Family</b> <b>CITY-LIGHT ELEGANCE LED</b>	<b>Order number:</b> 5XA5265KF14H + 5XA54000XSA <b>EAN:</b> 4058352834893 + 4058352161326	<b>LP number</b> <b>59106_28</b>
	<b>Version</b> post-top- or mounting to wall arm, spreader element, amber <b>Optic</b> asymmetric, wide distribution (ST1.2a) <b>Cover</b> cover transparent, PMMA <b>Lamps</b> LED 4000 K   CRI ≥ 70 <b>Controlgear</b> ECG SITECO iQ <b>Rated values</b> Net luminous flux = 1030 lm Power consumption = 10.0 W Luminous efficacy = 103 lm/W	<b>serial documentation</b> <b>07.07.2022</b>







**Luminous intensity in cd/klm**
C180-0
C205-25
C210-30
C270-90
**Imax: 635 cd/klm**

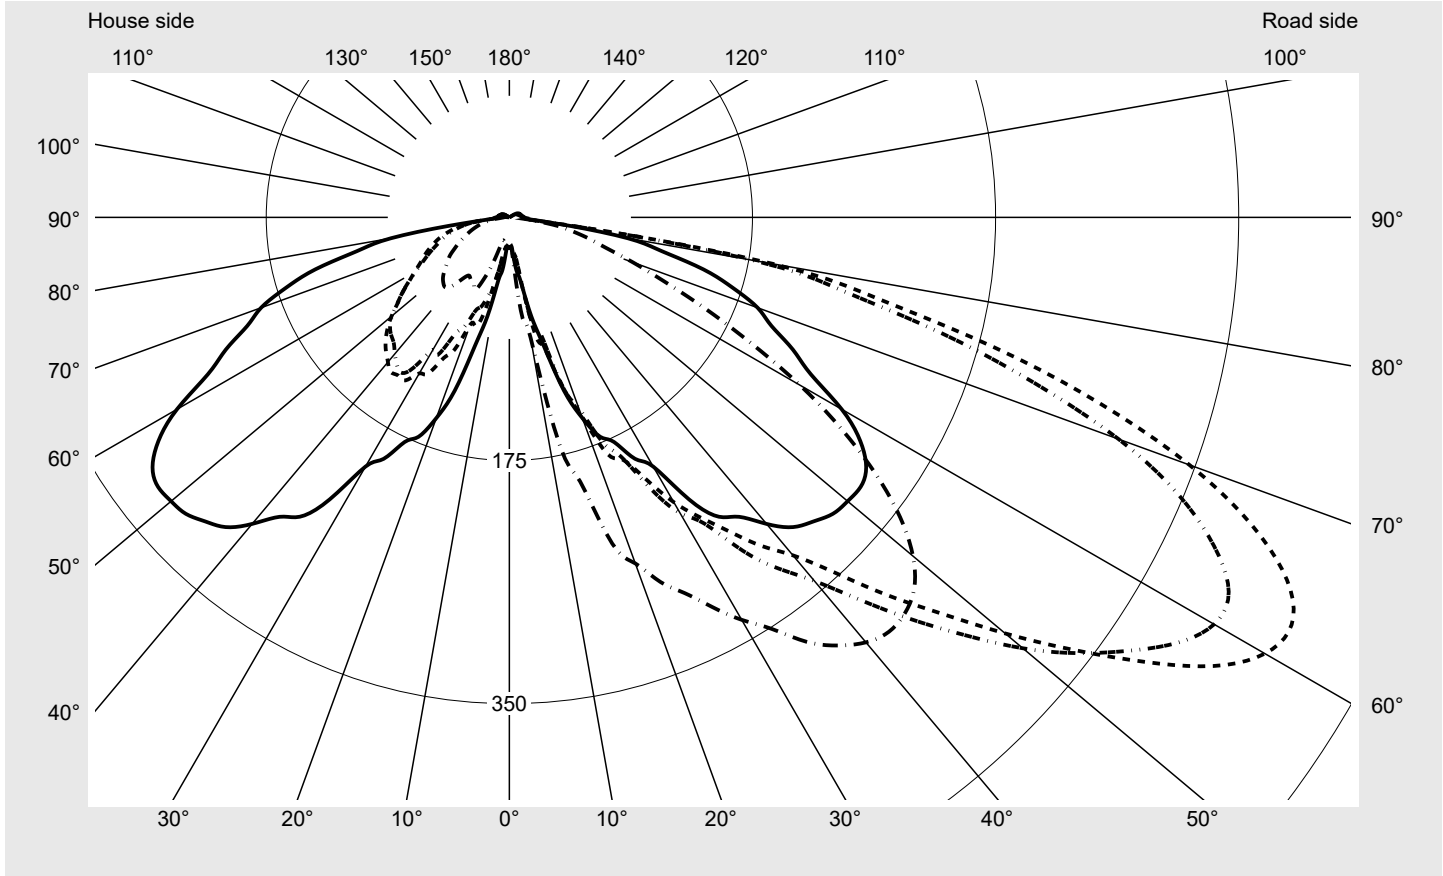

**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	97.8%
Eta 90° - 180°	2.2%

**Luminous intensity class acc. to EN13201-2**

Class:	G1
Imax 70°	521.0
Imax 80°	192.8
Imax 90°	10.9
Imax >90°	10.3
Imax >95°	9.2


**Measurement conditions**

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> CITY-LIGHT ELEGANCE LED	<b>Order number:</b> 5XA5265KF14H + 5XA54000XSA <b>EAN:</b> 4058352834893 + 4058352161326	<b>LP number</b> 59106_28
--	--	------------------------------

**Envelope curve in cd/klm**      **KMK 62.5°**    **KMK 60°**    **KMK 57.5°**    **KMK 55°**      **siteco**

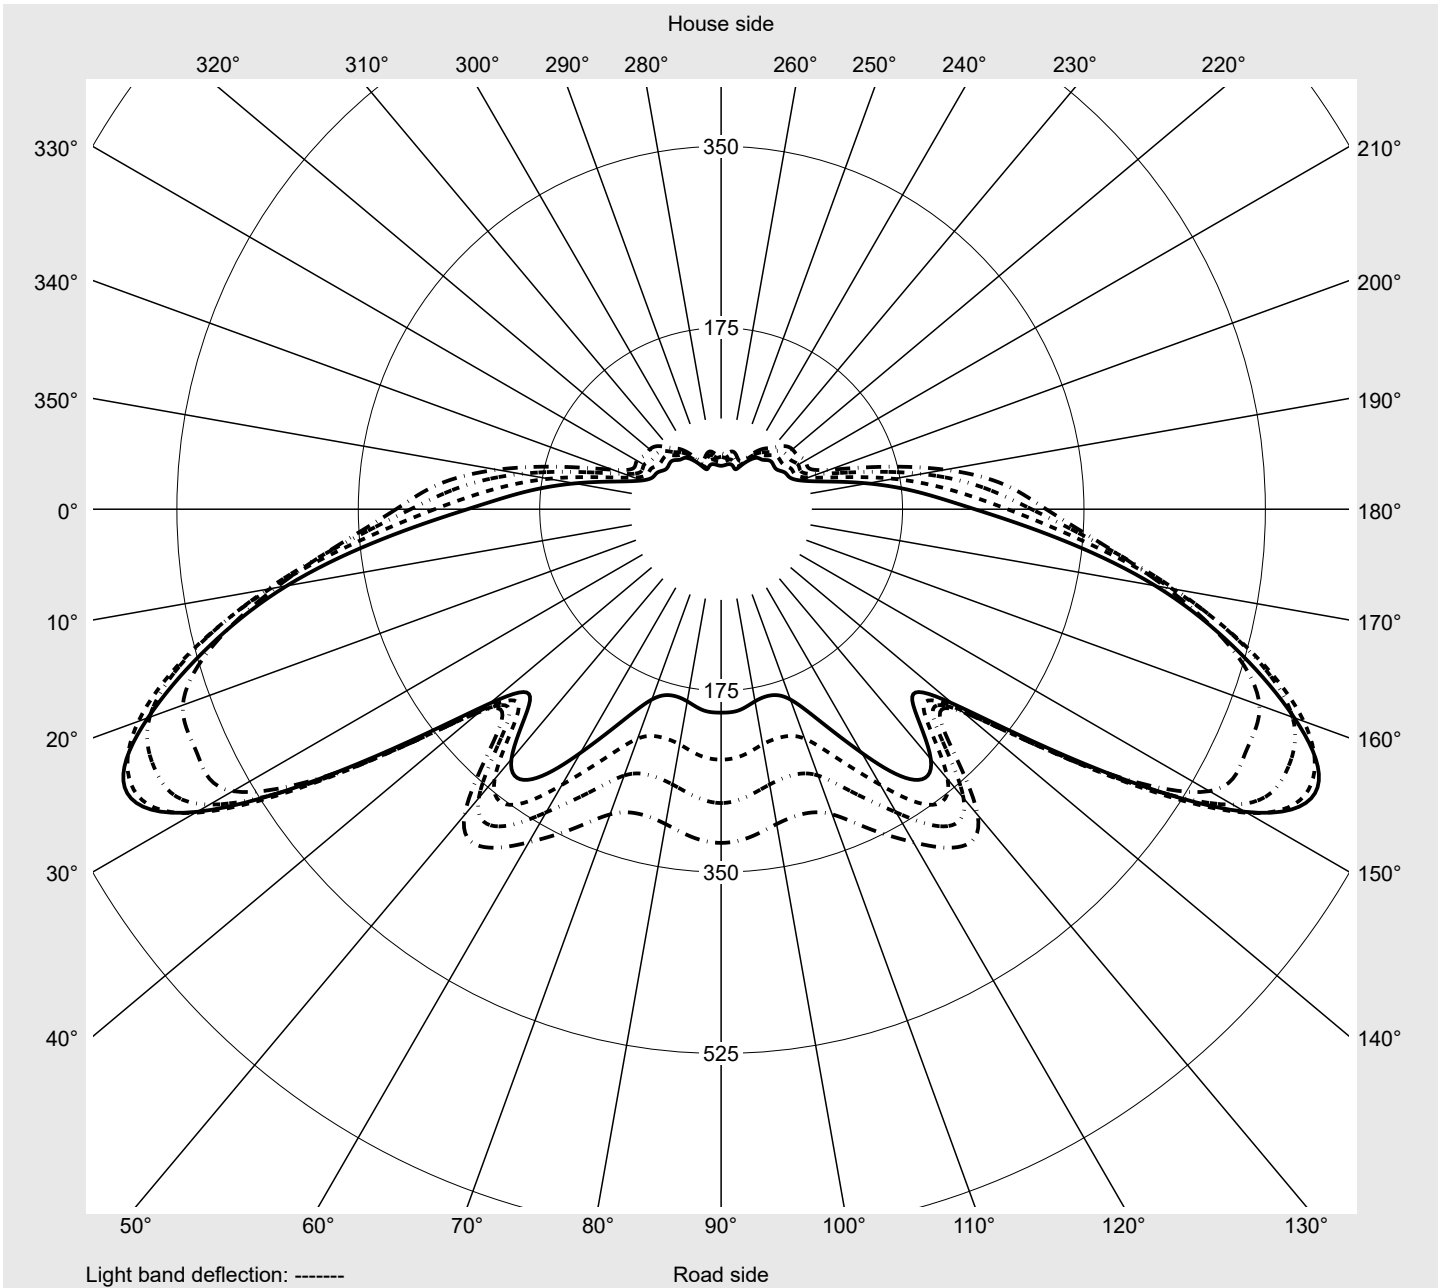

## Photometric test report

<b>Family</b> <b>CITY-LIGHT ELEGANCE LED</b>	<b>Order number: 5XA5265KF14H + 5XA54000XSA</b> <b>EAN: 4058352834893 + 4058352161326</b>	<b>LP number</b> <b>59106_28</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	21.9	21.9	21.9	21.9	21.9	21.9	21.9	21.9	21.9	21.9	21.9	21.9	21.9
2,5°	21.8	21.8	21.5	21.8	21.5	21.8	21.2	21.8	21.8	21.8	21.8	21.8	21.8
5,0°	22.7	23.0	23.5	24.4	25.2	26.1	26.7	26.7	27.3	27.5	28.7	29.5	30.7
7,5°	38.2	40.2	41.6	41.3	37.3	32.1	29.0	28.4	30.7	35.9	42.7	49.6	54.2
10,0°	46.5	43.3	44.2	45.6	45.9	41.6	37.0	40.2	52.2	68.0	82.6	90.7	97.0
12,5°	72.9	74.9	82.0	88.1	91.2	86.6	83.5	78.6	85.5	91.2	96.4	107.6	119.3
15,0°	95.8	93.5	97.0	101.6	105.0	97.0	86.1	82.6	91.8	115.6	133.1	148.9	165.5
17,5°	130.8	137.7	132.0	128.8	137.4	128.8	128.2	125.1	118.5	139.7	158.1	156.3	177.0
20,0°	153.8	160.9	163.2	165.0	168.4	152.3	146.0	135.4	130.2	155.5	176.7	182.4	208.8
22,5°	171.0	184.5	190.5	193.6	208.0	184.2	174.7	163.8	145.2	168.4	197.7	198.5	217.4
25,0°	178.4	194.2	193.6	192.5	199.9	192.2	189.9	176.4	154.0	179.6	207.1	211.7	242.7
27,5°	195.9	208.8	216.0	218.3	228.1	212.0	220.0	206.5	164.4	193.9	232.1	236.7	265.1
30,0°	207.1	224.6	235.2	242.1	244.4	236.7	245.8	220.6	181.6	220.6	265.9	269.1	293.8
32,5°	240.7	255.3	261.1	264.8	270.2	256.2	261.3	241.8	196.8	241.3	299.5	296.3	319.3
35,0°	263.1	278.8	280.0	282.6	287.7	276.0	292.9	262.8	211.7	264.5	323.9	325.3	351.7
37,5°	271.7	289.2	292.3	295.8	304.1	298.1	318.7	279.4	218.9	282.0	348.8	357.2	379.8
40,0°	288.0	305.5	313.8	319.3	322.4	317.6	341.7	303.2	235.5	295.5	375.5	384.1	400.2
42,5°	302.4	320.4	336.2	347.7	349.1	346.8	373.2	327.0	247.9	314.1	397.3	404.2	416.0
45,0°	309.5	331.0	356.3	379.5	387.8	384.4	409.1	350.8	265.4	325.0	409.1	418.5	426.6
47,5°	315.8	342.5	380.4	414.0	426.0	422.3	445.2	376.7	276.8	327.9	414.5	426.6	428.3
50,0°	317.9	353.4	404.5	447.5	465.3	465.9	482.5	401.3	289.7	324.4	412.2	425.1	418.0
52,5°	318.7	361.7	422.3	479.1	509.2	511.2	515.2	420.0	298.6	316.7	402.2	414.5	398.2
55,0°	313.5	366.3	436.3	507.2	552.5	557.7	543.9	432.9	304.4	305.5	385.0	397.9	370.9
57,5°	299.5	362.6	444.4	527.0	586.6	601.0	570.0	436.0	302.9	292.0	363.8	373.5	337.6
60,0°	276.3	350.3	441.8	529.0	598.1	628.0	585.8	437.2	300.4	277.1	339.9	348.0	307.0
62,5°	244.7	327.3	425.4	511.5	588.4	634.8	583.8	428.6	291.7	260.8	314.7	317.9	271.4
65,0°	225.2	305.8	402.5	483.4	560.0	617.6	559.7	405.3	277.1	241.3	286.0	284.3	235.2
67,5°	204.3	285.4	372.6	443.5	515.2	578.3	521.2	369.2	254.7	216.9	256.2	250.7	199.7
70,0°	190.2	268.2	346.0	402.5	464.7	521.0	466.7	328.8	230.4	194.2	226.1	220.9	181.0
72,5°	168.7	241.0	306.4	352.6	400.5	446.1	396.2	279.7	201.1	165.5	193.9	202.0	150.3
75,0°	144.6	203.4	255.6	293.5	329.9	361.2	322.2	229.5	166.4	135.1	154.0	164.4	125.9
77,5°	112.5	158.1	197.4	226.3	252.2	273.4	247.6	176.1	125.4	97.8	121.1	139.7	123.9
80,0°	86.6	115.3	142.6	162.9	179.3	192.8	179.0	130.0	94.7	76.9	90.1	108.2	91.8
82,5°	35.0	39.3	41.9	44.5	40.7	39.0	37.0	30.7	24.7	21.8	23.8	26.7	27.3
85,0°	12.9	12.9	14.1	14.3	14.1	13.8	13.2	12.3	10.9	9.8	10.6	12.0	12.6
87,5°	10.9	11.5	12.3	12.3	12.0	12.0	11.5	10.6	9.8	8.6	9.2	10.9	11.5
90,0°	9.8	9.8	10.6	10.9	10.3	10.3	10.0	9.5	8.6	7.7	8.0	9.5	10.3
92,5°	8.9	9.5	9.8	9.8	9.8	9.5	9.2	8.9	7.7	7.5	7.7	8.9	9.5
95,0°	8.3	8.9	9.2	9.2	9.2	8.9	8.6	8.3	7.7	7.2	7.5	8.3	8.9
97,5°	8.0	8.0	8.6	8.6	8.3	8.0	8.0	7.7	7.2	6.9	7.2	7.7	8.6
100,0°	7.5	7.7	8.0	8.0	8.0	7.7	7.5	7.2	6.9	6.9	6.9	7.2	8.0
102,5°	7.5	7.5	7.7	7.7	7.5	7.5	7.2	6.9	6.9	6.3	6.9	7.2	7.7
105,0°	6.9	6.9	7.5	7.5	7.2	6.9	6.9	6.6	6.3	6.3	6.3	6.9	7.2
107,5°	6.3	6.9	6.9	6.9	6.6	6.6	6.3	6.3	6.3	6.3	6.3	6.6	7.2
110,0°	6.3	6.3	6.3	6.6	6.3	6.3	6.0	6.0	5.7	6.3	6.3	6.3	6.9
112,5°	5.7	6.3	6.3	6.3	6.0	5.7	5.7	5.7	5.7	5.7	5.7	6.3	6.3

## Photometric test report

<b>Family</b> <b>CITY-LIGHT ELEGANCE LED</b>	<b>Order number: 5XA5265KF14H + 5XA54000XSA</b> <b>EAN: 4058352834893 + 4058352161326</b>	<b>LP number</b> <b>59106_28</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

**siteco**

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	21.9	21.9	21.9	21.9	21.9	21.9	21.9	21.9	21.9	21.9	21.9	21.9	21.9
2,5°	21.8	21.8	21.8	21.8	22.1	21.8	21.8	21.8	21.8	21.8	21.8	21.8	21.8
5,0°	31.0	31.3	31.3	31.0	31.0	31.0	22.1	22.1	21.8	21.8	21.8	21.5	21.5
7,5°	57.4	60.8	64.5	68.6	71.7	73.4	34.1	29.5	26.1	24.4	22.7	22.1	21.5
10,0°	98.4	96.1	93.8	90.4	87.8	87.8	48.2	50.8	46.8	41.0	34.4	28.4	24.7
12,5°	138.3	151.5	158.4	165.5	167.2	168.7	68.6	53.9	40.4	40.7	46.2	48.5	43.6
15,0°	181.6	187.9	191.3	196.5	199.1	196.8	94.7	87.5	82.0	76.9	72.6	58.2	55.9
17,5°	196.5	216.0	230.6	238.1	242.7	246.1	117.3	107.6	106.7	97.2	82.0	67.4	57.4
20,0°	228.9	237.8	247.3	257.3	263.1	265.1	154.9	137.1	112.5	92.4	82.0	71.7	68.8
22,5°	242.1	255.9	270.2	280.8	284.3	284.0	157.5	137.1	124.2	115.6	103.0	85.8	73.4
25,0°	269.9	280.0	287.7	294.9	298.3	298.3	174.4	160.4	146.9	131.4	111.6	92.7	76.3
27,5°	293.2	301.5	309.0	315.0	316.7	316.1	186.8	169.0	154.9	141.4	126.8	111.6	92.4
30,0°	318.4	325.9	330.5	333.1	333.9	334.5	199.9	179.9	159.5	144.3	129.7	110.2	89.5
32,5°	342.5	348.8	352.0	352.8	351.7	351.1	232.4	205.4	179.0	158.1	139.1	128.2	107.6
35,0°	374.9	373.8	370.1	367.5	370.1	372.9	249.3	218.0	186.5	160.6	139.1	136.3	125.6
37,5°	395.9	387.3	381.5	381.5	385.3	388.4	257.3	224.9	191.9	165.0	140.3	133.1	126.5
40,0°	407.6	397.9	392.7	391.6	395.6	399.3	273.4	235.8	198.5	165.0	136.0	128.2	125.9
42,5°	421.4	407.9	397.9	395.6	400.5	404.5	286.3	243.6	202.2	161.5	131.4	123.1	122.2
45,0°	427.7	407.1	393.9	393.6	399.6	402.8	294.6	249.3	202.2	155.8	125.9	120.2	119.9
47,5°	420.8	395.3	382.7	384.7	392.2	395.3	298.9	250.2	198.2	146.9	119.1	116.5	114.5
50,0°	401.3	374.9	363.8	366.9	375.8	379.2	296.0	245.8	187.0	134.3	110.7	110.2	107.3
52,5°	374.7	347.7	337.4	340.8	350.3	354.6	289.2	236.1	174.1	122.8	101.3	101.6	98.4
55,0°	340.5	313.3	304.4	308.4	317.6	321.9	274.0	219.5	157.8	111.3	93.5	93.8	90.4
57,5°	301.5	273.4	265.6	269.7	278.6	283.4	251.0	196.2	138.3	99.5	85.5	85.8	82.3
60,0°	265.1	235.5	227.5	230.4	238.4	241.5	220.3	169.0	119.1	89.2	78.9	78.0	74.3
62,5°	225.5	195.4	185.9	188.2	194.8	196.2	190.5	143.4	103.3	81.2	72.9	70.9	66.3
65,0°	186.5	156.1	146.6	149.5	156.1	156.1	166.7	123.4	92.1	75.4	68.3	65.1	60.0
67,5°	154.0	124.5	114.5	115.6	118.8	121.1	146.6	107.6	83.2	70.3	64.0	59.7	53.4
70,0°	129.1	100.1	90.1	90.1	91.5	94.7	132.0	96.1	76.3	64.8	59.1	54.5	48.2
72,5°	106.1	80.3	69.7	68.0	70.0	72.9	115.0	85.2	68.8	59.4	54.5	50.2	42.7
75,0°	88.6	64.5	55.4	53.4	55.4	59.7	97.5	73.7	61.1	53.1	49.1	45.0	37.9
77,5°	73.4	51.9	43.9	41.9	43.6	47.0	79.5	61.7	52.5	46.2	42.7	39.6	33.0
80,0°	56.8	41.0	34.4	32.4	33.3	35.0	62.0	49.9	43.6	39.0	36.4	33.6	28.4
82,5°	25.5	22.4	20.4	19.2	18.1	17.8	31.0	28.7	27.5	26.1	25.8	25.0	22.1
85,0°	13.2	13.2	13.2	13.2	13.2	13.2	13.5	13.5	13.2	13.5	13.2	13.2	12.3
87,5°	11.5	11.8	12.0	11.8	11.8	11.5	11.5	11.2	11.2	10.6	10.0	9.8	9.2
90,0°	10.3	10.9	10.9	10.9	10.9	10.9	9.5	9.5	9.2	8.9	8.3	7.7	7.5
92,5°	9.8	10.3	10.3	10.3	10.3	10.3	8.9	8.6	8.3	7.7	7.5	7.2	6.6
95,0°	9.2	9.5	9.8	9.8	9.8	9.8	8.0	8.0	7.7	7.2	6.9	6.6	6.0
97,5°	8.6	9.2	9.2	9.2	9.2	9.2	7.7	7.5	7.2	6.9	6.6	6.0	5.5
100,0°	8.3	8.6	8.9	8.6	8.6	8.6	7.5	7.2	6.9	6.6	6.0	5.7	5.5
102,5°	8.0	8.0	8.6	8.6	8.6	8.6	6.9	6.9	6.6	6.3	6.0	5.5	5.2
105,0°	7.5	8.0	8.0	8.0	8.0	8.0	6.9	6.3	6.3	5.7	5.5	5.2	4.9
107,5°	7.5	7.5	8.0	8.0	8.0	8.0	6.3	6.3	6.0	5.7	5.2	5.2	4.9
110,0°	7.2	7.5	7.5	7.5	7.5	7.5	6.0	5.7	5.7	5.2	5.2	4.6	4.6
112,5°	6.9	6.9	7.5	7.5	7.5	7.5	5.7	5.5	5.2	4.9	4.6	4.6	4.3

## Photometric test report

<b>Family</b> <b>CITY-LIGHT ELEGANCE LED</b>	<b>Order number: 5XA5265KF14H + 5XA54000XSA</b> <b>EAN: 4058352834893 + 4058352161326</b>	<b>LP number</b> <b>59106_28</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	21.9	21.9	21.9	21.9	21.9	21.9	21.9	21.9	21.9	21.9	21.9	0.0	0.0
2,5°	21.8	21.8	21.8	21.8	21.8	21.8	21.8	21.8	22.1	21.8	21.8	0.3	0.3
5,0°	21.8	21.8	21.5	21.8	21.8	21.8	21.8	21.5	21.5	21.5	21.2	0.6	0.9
7,5°	21.5	21.2	21.2	21.2	21.2	21.2	21.2	20.9	20.9	20.7	20.7	1.3	2.1
10,0°	22.4	21.2	20.7	20.4	20.1	20.1	19.8	19.5	19.2	18.9	18.9	2.3	4.4
12,5°	37.6	31.3	25.2	21.8	20.1	19.5	19.5	18.4	17.5	17.5	17.8	4.3	8.7
15,0°	54.2	52.8	47.9	41.9	31.8	21.5	20.1	18.4	17.8	17.2	17.2	6.6	15.3
17,5°	49.3	42.2	39.6	34.1	37.9	37.6	30.1	28.1	23.2	22.1	22.4	9.2	24.5
20,0°	63.1	53.9	49.3	42.2	42.5	31.8	26.7	30.7	38.7	39.3	36.7	12.0	36.6
22,5°	60.8	51.9	46.5	42.7	43.3	38.2	34.4	41.3	45.3	47.9	48.2	15.0	51.6
25,0°	59.7	50.2	44.5	44.2	43.0	41.3	39.6	46.2	49.6	55.1	57.4	17.7	69.2
27,5°	68.6	53.9	48.2	46.2	46.5	46.5	50.2	56.2	51.4	53.9	55.1	21.2	90.4
30,0°	71.7	62.5	55.1	50.5	47.0	44.5	47.0	54.5	52.8	53.6	53.4	24.7	115.0
32,5°	90.7	74.6	59.4	54.8	52.5	51.4	51.4	53.9	51.6	51.1	52.2	29.0	144.1
35,0°	114.7	97.5	81.5	72.0	64.8	55.1	49.6	54.2	52.5	50.5	51.1	33.5	177.6
37,5°	121.3	107.3	92.1	82.9	70.6	58.8	51.9	59.4	58.8	55.4	56.2	37.5	215.1
40,0°	120.5	104.4	91.8	84.9	72.3	60.8	57.7	66.0	67.1	64.0	64.8	41.5	256.6
42,5°	119.1	104.1	92.7	84.6	72.6	62.0	58.2	66.0	69.1	66.6	68.3	45.3	301.9
45,0°	117.6	104.1	91.2	83.8	72.3	62.0	58.5	64.5	68.3	65.7	67.1	48.8	350.7
47,5°	112.7	101.6	90.1	83.2	71.4	60.8	57.7	63.4	65.7	63.1	64.8	51.7	402.4
50,0°	105.9	96.7	86.1	79.5	68.3	58.5	55.7	61.4	62.5	60.0	61.4	53.9	456.3
52,5°	97.5	91.5	82.3	76.0	66.0	55.9	53.1	57.9	59.4	55.9	57.4	55.2	511.6
55,0°	89.8	86.1	77.5	71.1	62.5	53.1	50.2	54.8	56.5	53.4	53.9	55.8	567.3
57,5°	82.0	79.5	72.0	66.8	59.4	50.5	47.0	51.1	53.1	49.9	50.5	55.2	622.6
60,0°	74.0	73.4	67.7	64.0	56.8	48.5	43.9	47.0	48.8	46.5	45.9	53.8	676.4
62,5°	66.0	66.3	62.3	60.5	54.8	47.0	41.0	43.3	44.2	42.7	41.9	51.1	727.5
65,0°	60.0	60.2	57.7	57.7	52.2	45.3	38.7	39.9	40.4	39.3	37.9	47.7	775.2
67,5°	53.6	54.5	53.1	54.5	49.9	43.3	36.1	36.4	36.7	35.0	33.9	43.7	818.9
70,0°	48.2	49.3	48.8	50.5	46.8	40.7	33.6	33.0	33.0	31.0	30.4	39.7	858.6
72,5°	42.5	43.6	43.6	45.6	42.5	37.0	31.6	30.1	29.3	27.5	27.0	34.8	893.5
75,0°	36.7	37.3	37.6	39.3	36.4	32.1	28.4	27.0	25.8	24.1	23.5	29.3	922.8
77,5°	31.3	31.0	30.4	32.1	30.1	27.0	23.8	23.0	22.4	20.4	20.1	23.5	946.3
80,0°	25.8	25.2	24.4	25.8	24.7	22.4	20.4	19.2	18.6	16.9	16.1	17.9	964.2
82,5°	20.1	19.2	18.4	20.4	19.5	18.1	16.4	15.8	14.6	13.2	12.6	6.9	971.2
85,0°	10.9	10.0	9.8	11.2	11.5	10.6	10.3	10.0	9.5	8.0	7.5	3.3	974.4
87,5°	7.7	6.6	5.7	7.2	7.7	7.5	7.2	7.2	6.6	5.7	5.2	2.7	977.1
90,0°	6.3	5.2	4.6	5.5	5.7	5.5	5.5	5.2	4.9	4.3	4.0	2.3	979.4
92,5°	5.7	4.6	4.0	4.9	5.2	4.9	4.9	4.6	4.6	4.0	4.0	2.1	981.5
95,0°	5.5	4.6	4.0	4.3	4.6	4.6	4.6	4.6	4.3	3.7	3.4	2.0	983.5
97,5°	4.9	4.3	4.0	4.0	4.3	4.0	4.0	4.0	4.0	3.7	3.4	1.8	985.3
100,0°	4.9	4.3	4.0	4.0	4.0	4.0	4.0	4.0	4.0	3.7	3.4	1.7	987.1
102,5°	4.9	4.3	4.0	3.7	4.0	4.0	4.0	4.0	3.7	3.4	3.4	1.7	988.8
105,0°	4.6	4.3	3.7	3.4	4.0	3.4	3.4	4.0	3.7	3.4	3.4	1.6	990.3
107,5°	4.3	4.3	3.7	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	1.5	991.8
110,0°	4.3	4.0	3.7	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	1.4	993.2
112,5°	4.0	3.7	3.7	3.2	3.2	3.2	3.2	3.4	3.4	3.2	3.4	1.3	994.6

## Photometric test report

<b>Family</b> CITY-LIGHT ELEGANCE LED	<b>Order number:</b> 5XA5265KF14H + 5XA54000XSA <b>EAN:</b> 4058352834893 + 4058352161326	<b>LP number</b> 59106_28
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	5.7	5.7	5.7	5.7	5.7	5.5	5.5	5.2	5.7	5.7	5.7	5.7	6.0
117,5°	5.2	5.2	5.2	5.2	5.2	4.6	4.9	4.9	5.2	5.2	5.2	5.2	5.5
120,0°	4.3	4.3	4.3	4.3	4.0	4.0	4.0	4.0	4.0	4.0	4.3	4.3	4.6
122,5°	2.9	2.9	3.2	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9
125,0°	2.0	2.0	2.3	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
127,5°	1.7	1.7	1.7	1.7	1.7	1.7	1.4	1.7	1.7	1.4	1.7	1.4	1.7
130,0°	1.7	1.7	1.7	1.4	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1
132,5°	1.4	1.1	1.4	1.4	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1
135,0°	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	0.9	0.9	0.6	0.6	0.6
137,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> CITY-LIGHT ELEGANCE LED	<b>Order number:</b> 5XA5265KF14H + 5XA54000XSA <b>EAN:</b> 4058352834893 + 4058352161326	<b>LP number</b> 59106_28
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
115,0°	6.3	6.6	6.9	6.9	6.9	6.9	5.5	5.2	5.2	4.6	4.6	4.3	4.0
117,5°	5.7	6.0	6.3	6.3	6.3	6.3	4.9	4.6	4.6	4.3	4.0	4.0	4.0
120,0°	4.6	4.9	5.2	5.2	5.2	5.2	4.0	4.0	3.7	3.7	3.4	3.4	3.2
122,5°	2.9	3.2	3.2	3.4	3.4	3.4	2.9	2.9	2.9	2.9	2.6	2.3	2.6
125,0°	1.7	1.7	1.7	1.7	1.7	1.7	2.0	2.0	2.0	2.0	2.0	1.7	2.0
127,5°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
130,0°	1.1	1.1	1.1	1.1	1.1	1.1	1.7	1.7	1.7	1.7	1.7	1.7	1.7
132,5°	1.1	1.1	1.1	1.1	1.1	1.1	1.7	1.7	1.7	1.7	1.7	1.7	1.7
135,0°	0.6	0.6	0.6	0.6	0.6	0.6	1.1	1.1	1.1	1.4	1.4	1.7	1.7
137,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>CITY-LIGHT ELEGANCE LED</b>	<b>Order number: 5XA5265KF14H + 5XA54000XSA</b> <b>EAN: 4058352834893 + 4058352161326</b>	<b>LP number</b> <b>59106_28</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	4.0	3.7	3.4	3.2	2.9	2.9	2.9	3.2	2.9	3.2	3.4	1.2	995.8
117,5°	3.7	3.4	3.4	2.9	2.9	2.9	2.9	2.9	2.9	3.2	3.4	1.1	996.9
120,0°	3.2	2.9	2.9	2.9	2.6	2.3	2.3	2.3	2.3	2.9	2.9	0.9	997.8
122,5°	2.3	2.3	2.3	2.3	2.3	2.0	2.0	2.3	2.3	2.3	2.3	0.6	998.4
125,0°	2.0	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	2.0	2.3	0.4	998.8
127,5°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	0.4	999.2
130,0°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	0.3	999.5
132,5°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.4	1.7	1.7	1.7	0.3	999.8
135,0°	1.4	1.7	1.1	1.4	1.4	1.1	1.1	1.1	1.1	1.1	1.1	0.2	1000.0
137,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
142,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0



## Photometric test report

<b>Family</b> CITY-LIGHT ELEGANCE LED	<b>Order number:</b> 5XA5265KF14H + 5XA54000XSA <b>EAN:</b> 4058352834893 + 4058352161326	<b>LP number</b> 59106_28
--	--	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1030	10.0	10.4	10.2
95	241	252	977	9.5	9.9	9.7
90	229	250	929	9.0	9.3	9.2
85	216	248	876	8.5	8.8	8.6
80	203	246	823	8.0	8.3	8.2
75	190	243	770	7.6	7.7	7.6
70	178	241	722	7.1	7.3	7.2
65	165	238	669	6.6	6.8	6.7
60	152	235	616	6.1	6.4	6.2
55	140	232	568	5.7	5.9	5.8
50	127	229	515	5.3	5.5	5.4
45	114	225	462	4.8	5.0	4.9
40	102	221	414	4.4	4.6	4.5
35	89	216	361	4.0	4.1	4.0
30	76	210	308	3.6	3.7	3.6
30	75	209	304	3.5	3.7	3.6