




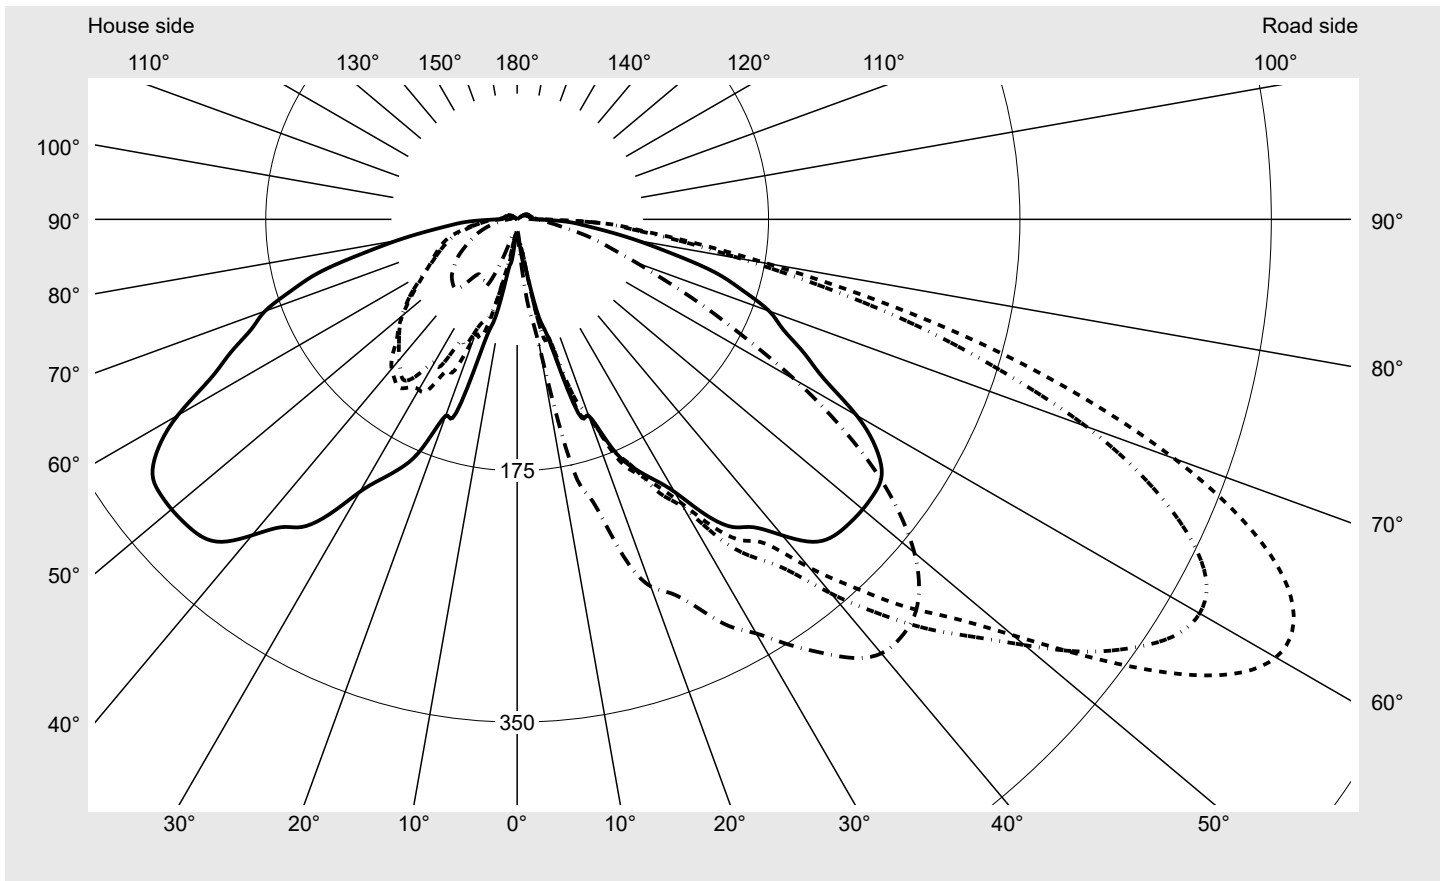
Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275KF14H + 5XA54000XSA EAN: 4058352835258 + 4058352161326	LP number 59107_28
	Version post-top- or mounting to wall arm, spreader element, amber Optic asymmetric, wide distribution (ST1.2a) Cover cover transparent, PMMA Lamps LED 4000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 1030 lm Power consumption = 10.0 W Luminous efficacy = 103 lm/W	serial documentation 07.07.2022



Luminous intensity in cd/klm
C180-0
C205-25
C210-30
C270-90
Imax: 610 cd/klm




Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	97.2%
Eta 90° - 180°	2.8%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G1
Imax 70°	486.7
Imax 80°	176.6
Imax 90°	16.1
Imax >90°	12.6
Imax >95°	10.8

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275KF14H + 5XA54000XSA EAN: 4058352835258 + 4058352161326	LP number 59107_28
--------------------------------------	--	------------------------------

Envelope curve in cd/klm **KMK 60°** **KMK 57.5°** **KMK 55°** **KMK 52.5°** **siteco**

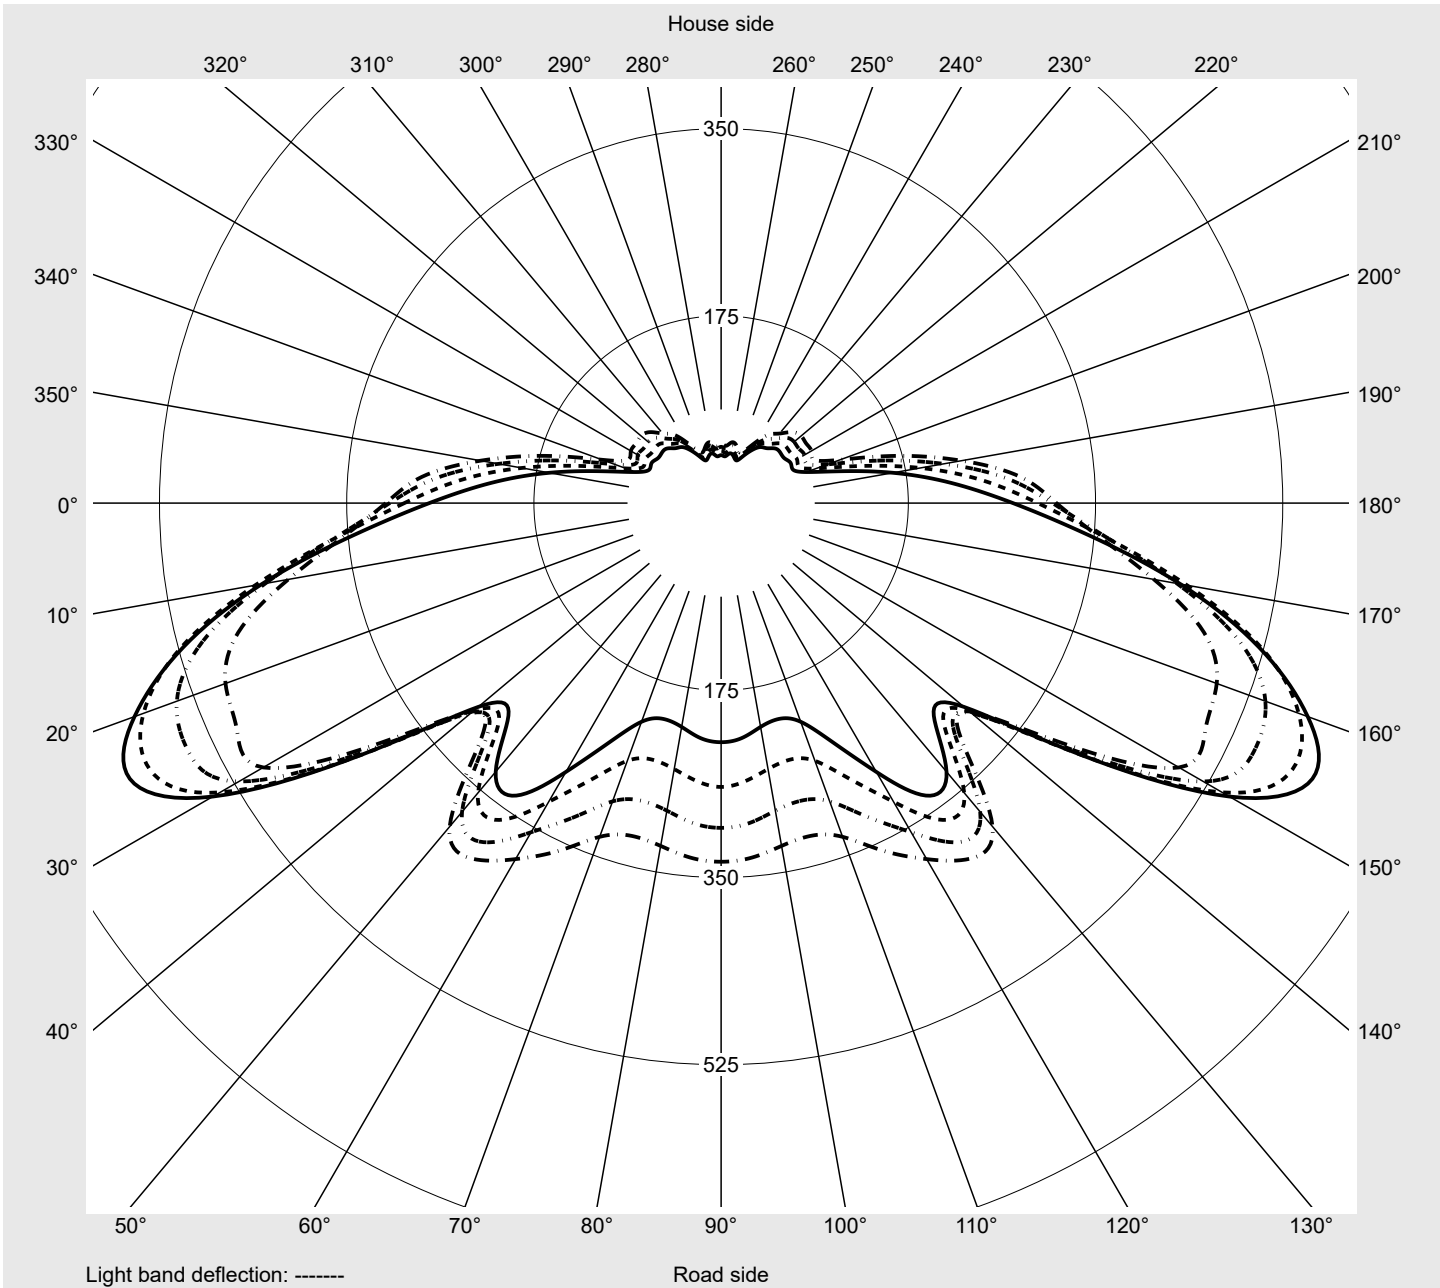

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275KF14H + 5XA54000XSA EAN: 4058352835258 + 4058352161326	LP number 59107_28
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7
2,5°	10.8	10.8	10.8	10.8	10.8	10.8	10.8	11.1	11.1	11.4	11.4	11.7	11.7
5,0°	12.3	13.4	14.3	15.5	16.7	17.6	18.2	18.8	19.7	20.9	23.0	24.8	26.0
7,5°	29.3	30.5	30.8	28.7	24.8	20.0	17.9	19.4	24.5	30.8	38.5	45.1	49.3
10,0°	37.1	34.1	36.8	39.7	38.8	34.4	33.5	41.8	58.9	74.1	85.2	89.3	88.4
12,5°	69.6	85.5	94.1	97.7	92.0	83.7	84.3	76.8	79.5	87.5	100.7	112.6	121.0
15,0°	89.6	82.5	90.8	100.7	100.1	89.0	85.5	89.6	101.0	121.3	137.2	147.3	167.6
17,5°	141.3	148.2	135.7	136.3	142.5	138.9	126.7	114.1	112.1	141.0	154.8	159.9	178.7
20,0°	145.5	161.4	156.6	154.5	156.3	147.3	145.5	134.5	133.3	159.3	177.5	183.5	206.8
22,5°	172.1	187.6	183.2	183.5	181.7	177.5	173.3	151.8	139.8	170.9	196.6	206.8	230.1
25,0°	190.6	205.3	201.7	205.9	201.1	194.5	189.7	167.6	153.9	180.5	214.2	222.3	242.9
27,5°	203.5	216.9	214.5	215.1	210.7	208.3	214.8	184.7	166.4	202.9	244.1	246.8	274.3
30,0°	219.0	233.4	234.6	236.4	229.8	227.7	231.9	199.0	183.2	223.8	263.5	272.2	298.8
32,5°	243.5	256.7	259.1	260.9	254.0	253.7	264.4	223.2	199.9	252.5	308.4	311.9	332.0
35,0°	261.5	273.7	277.9	280.6	273.7	272.8	287.1	241.4	220.8	271.6	335.0	339.1	356.5
37,5°	270.1	280.3	281.8	286.8	281.2	284.8	306.9	256.1	234.3	291.9	359.5	367.8	383.4
40,0°	287.1	299.1	306.9	317.0	311.4	316.4	340.0	280.9	250.4	311.1	388.7	397.4	407.0
42,5°	304.5	317.0	332.0	348.4	340.3	347.8	372.0	306.9	266.2	324.8	404.9	412.0	417.1
45,0°	311.6	328.7	352.6	375.0	371.4	381.0	402.8	330.2	281.5	331.7	410.9	419.2	420.1
47,5°	313.4	335.6	367.2	400.1	401.9	410.6	430.0	352.6	290.4	331.7	411.4	421.3	418.6
50,0°	314.0	343.6	388.4	429.7	440.7	450.3	461.1	374.7	300.3	328.7	405.2	416.8	406.1
52,5°	313.4	353.8	410.9	467.3	493.0	499.6	494.2	392.9	303.0	320.9	394.7	405.8	384.3
55,0°	309.9	360.7	432.7	502.3	541.4	549.5	520.5	403.4	305.7	310.5	376.8	386.9	355.3
57,5°	296.1	359.5	442.2	522.9	574.6	589.2	540.8	409.7	302.1	295.2	353.5	361.5	322.4
60,0°	272.8	345.1	436.0	520.5	583.6	609.9	548.6	410.0	296.4	281.2	327.8	333.8	290.1
62,5°	241.1	320.3	414.4	496.9	567.1	609.3	540.5	398.6	283.9	262.6	300.6	302.7	255.2
65,0°	220.5	296.4	386.9	463.1	536.3	588.3	513.9	378.6	271.3	244.4	273.1	272.2	224.4
67,5°	200.5	277.3	359.2	423.4	490.6	546.5	473.6	347.5	248.3	221.7	246.2	241.1	192.7
70,0°	186.8	259.4	330.2	382.5	438.9	486.7	421.6	311.4	224.7	199.0	216.3	217.5	174.5
72,5°	164.6	233.4	292.5	335.6	378.0	413.8	356.5	265.6	193.6	170.9	187.3	193.3	145.8
75,0°	142.5	197.2	244.7	278.8	310.2	334.7	290.7	217.2	158.1	138.9	147.6	158.7	128.2
77,5°	110.9	153.0	188.5	213.9	235.2	250.7	220.2	163.1	116.8	99.5	115.0	133.3	120.7
80,0°	85.2	112.1	136.6	155.1	167.6	176.6	158.7	120.4	90.5	77.4	83.7	99.2	84.3
82,5°	62.7	80.7	97.4	110.3	117.7	123.1	113.8	90.5	69.9	58.9	59.8	69.3	56.2
85,0°	46.3	57.1	68.1	77.4	81.9	84.9	81.0	66.9	51.1	43.9	43.3	47.8	42.4
87,5°	33.2	40.6	48.4	54.7	57.7	58.9	56.8	47.8	36.2	31.4	32.6	36.5	34.1
90,0°	13.4	13.4	14.9	15.8	16.1	15.8	15.2	13.7	12.6	11.7	12.8	14.0	14.9
92,5°	11.1	11.4	12.3	12.6	12.3	12.3	12.0	11.4	9.9	9.3	9.9	11.1	12.0
95,0°	10.5	10.5	11.4	11.7	11.4	11.1	11.1	10.2	9.3	8.7	9.0	10.2	11.1
97,5°	9.6	9.9	10.5	10.8	10.5	10.2	10.2	9.6	8.7	8.1	8.4	9.6	10.2
100,0°	9.0	9.6	9.9	9.9	9.9	9.6	9.3	9.0	8.1	7.8	8.1	9.0	9.6
102,5°	8.4	9.0	9.3	9.3	9.3	9.0	8.7	8.1	7.8	7.5	7.5	8.4	9.0
105,0°	8.4	8.4	8.4	8.7	8.4	8.4	8.1	7.8	7.5	7.2	7.5	7.8	8.7
107,5°	7.8	7.8	8.1	8.4	7.8	7.8	7.5	7.5	6.9	7.2	7.2	7.5	8.1
110,0°	7.2	7.5	7.8	7.8	7.5	7.2	7.2	6.9	6.6	6.6	6.9	7.2	7.8
112,5°	6.9	7.2	7.2	7.2	6.9	6.9	6.6	6.6	6.6	6.6	6.6	6.9	7.5

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275KF14H + 5XA54000XSA EAN: 4058352835258 + 4058352161326	LP number 59107_28
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7
2,5°	11.7	11.7	11.7	11.7	12.0	12.0	10.8	10.8	10.5	10.8	10.5	10.5	10.2
5,0°	26.9	27.5	28.1	28.4	28.4	28.1	12.0	11.7	11.4	11.1	10.8	10.8	10.5
7,5°	53.5	58.9	63.0	64.5	63.9	62.7	26.6	22.4	18.5	15.5	13.4	12.0	11.4
10,0°	89.3	89.6	92.6	92.6	91.4	92.0	40.3	42.1	38.5	35.6	29.9	22.7	17.3
12,5°	134.5	147.0	155.1	162.0	171.2	176.3	60.7	46.0	36.8	33.8	40.0	42.7	41.2
15,0°	186.5	190.6	198.1	199.9	200.5	203.2	89.6	81.9	77.7	72.9	71.1	66.6	49.6
17,5°	205.3	221.4	237.2	246.8	248.6	245.6	119.8	109.1	103.1	99.8	86.7	74.1	57.4
20,0°	230.7	245.9	252.8	260.6	268.6	271.9	151.5	142.2	116.8	100.1	87.3	80.7	68.1
22,5°	254.0	257.6	270.7	283.3	283.9	282.1	161.1	140.7	129.4	127.9	113.8	95.0	74.4
25,0°	268.9	283.6	291.0	296.7	297.3	298.8	180.2	164.0	150.6	137.2	116.2	93.5	74.4
27,5°	306.0	313.4	313.1	315.2	316.1	319.1	190.9	174.8	160.8	149.7	133.9	115.0	92.3
30,0°	323.6	329.6	332.6	337.0	334.1	332.9	207.1	184.7	164.0	150.0	136.9	114.4	91.7
32,5°	351.4	355.0	355.6	353.5	350.8	350.8	228.0	204.4	177.5	158.4	138.6	127.9	109.4
35,0°	375.3	378.3	373.5	369.9	368.4	368.1	246.2	218.1	188.8	166.4	143.1	136.9	127.3
37,5°	397.7	391.7	381.9	379.5	381.9	384.9	253.4	222.9	190.3	165.2	140.1	133.3	129.4
40,0°	412.3	399.5	387.5	385.8	390.5	394.4	271.6	236.7	198.4	165.8	136.0	127.9	126.7
42,5°	417.7	401.9	388.7	388.7	393.5	395.0	286.3	245.6	202.0	161.7	128.5	121.9	123.7
45,0°	418.3	398.0	384.3	384.6	389.3	390.8	291.6	245.9	198.7	151.8	118.6	116.2	119.8
47,5°	409.4	384.9	372.0	372.9	378.0	379.5	292.2	244.4	194.2	142.2	112.1	110.9	113.2
50,0°	387.8	361.8	350.8	353.5	359.2	361.0	288.6	238.1	182.9	129.7	104.3	104.6	105.5
52,5°	358.6	332.0	322.1	325.4	332.6	335.3	280.9	228.3	170.6	118.3	95.9	97.4	97.1
55,0°	323.6	296.7	288.0	291.9	300.3	303.6	267.4	211.3	153.6	105.8	87.8	89.9	88.7
57,5°	284.5	256.4	248.3	252.5	260.9	265.3	245.0	189.1	133.9	94.7	80.4	81.9	80.4
60,0°	246.5	217.5	208.9	212.4	220.5	223.5	216.0	163.1	115.0	84.9	74.1	75.0	72.6
62,5°	208.9	179.3	169.7	172.7	179.6	179.9	185.9	137.4	99.8	77.4	68.7	68.1	64.8
65,0°	178.1	147.6	137.4	139.2	144.3	144.0	162.0	118.6	88.7	72.3	64.8	63.0	58.6
67,5°	148.8	119.5	108.8	109.1	110.6	112.3	143.4	104.3	81.6	67.8	61.0	58.6	53.2
70,0°	126.4	97.7	87.0	85.5	86.4	88.4	129.1	94.1	75.3	64.2	57.7	54.4	48.1
72,5°	104.9	79.5	68.7	66.0	67.2	70.5	113.5	84.0	69.0	59.2	53.8	50.2	43.0
75,0°	87.3	65.1	55.6	52.3	54.1	58.0	97.1	73.2	61.9	53.8	49.3	46.0	38.8
77,5°	71.7	50.8	43.0	40.6	42.1	45.4	78.3	61.3	52.9	46.6	43.0	40.0	33.8
80,0°	53.5	39.7	33.8	32.0	32.3	33.5	61.3	49.9	44.2	39.4	36.5	34.1	29.0
82,5°	41.8	32.3	27.8	26.0	25.7	26.3	48.4	40.6	36.5	32.9	30.8	29.0	24.8
85,0°	33.8	26.9	23.6	21.8	21.2	20.9	37.4	32.6	29.9	27.2	25.7	23.9	20.9
87,5°	28.7	23.6	21.2	19.4	18.2	17.9	28.4	25.4	23.9	21.8	20.3	19.1	17.3
90,0°	14.6	14.0	13.7	13.4	13.1	13.1	13.4	12.8	12.8	12.3	12.0	11.4	10.8
92,5°	12.0	12.6	12.6	12.3	12.3	12.0	11.4	11.1	10.8	10.2	9.9	9.6	9.0
95,0°	11.4	11.4	11.7	11.7	11.4	11.4	10.2	10.2	9.9	9.3	9.0	8.7	7.8
97,5°	10.5	10.8	10.8	10.8	10.8	10.8	9.6	9.6	9.3	8.7	8.4	7.8	7.5
100,0°	9.9	10.2	10.2	10.2	10.2	10.2	9.0	9.0	8.4	8.1	7.8	7.2	6.9
102,5°	9.6	9.6	9.6	9.6	9.6	9.6	8.4	8.4	7.8	7.5	7.2	6.9	6.3
105,0°	9.0	9.0	9.6	9.6	9.3	9.0	7.8	7.8	7.5	7.2	6.6	6.3	6.0
107,5°	8.4	8.7	9.0	9.0	9.0	9.0	7.2	7.2	6.9	6.6	6.3	6.0	5.7
110,0°	8.1	8.4	8.4	8.4	8.4	8.4	7.2	6.9	6.6	6.3	6.0	5.7	5.4
112,5°	7.8	7.8	8.1	8.4	8.4	8.4	6.6	6.6	6.3	6.0	5.7	5.4	5.1

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275KF14H + 5XA54000XSA EAN: 4058352835258 + 4058352161326	LP number 59107_28
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	10.7	0.0	0.0
2,5°	10.5	10.8	10.5	10.5	10.5	10.8	10.8	10.8	10.5	10.5	10.8	0.1	0.1
5,0°	10.5	10.8	10.8	10.5	10.2	10.2	10.2	10.2	10.5	10.2	10.2	0.4	0.5
7,5°	11.1	10.8	10.8	10.8	10.8	10.8	10.8	10.2	10.2	9.9	10.2	0.9	1.5
10,0°	13.7	12.3	11.7	11.4	11.4	11.4	10.8	10.8	10.2	9.9	9.6	2.0	3.5
12,5°	33.2	24.8	17.0	13.1	12.0	12.0	11.4	10.5	9.9	9.6	9.6	4.1	7.6
15,0°	42.1	47.8	40.6	34.4	21.2	14.6	12.6	11.4	10.5	9.9	9.6	6.4	14.0
17,5°	45.7	37.6	32.9	29.3	35.0	30.8	23.0	20.6	15.5	14.3	13.7	9.3	23.3
20,0°	58.0	54.1	45.7	35.9	35.0	26.9	20.0	25.7	29.9	29.9	27.5	11.9	35.2
22,5°	59.5	50.8	41.5	38.2	37.9	34.4	27.2	35.0	36.8	42.4	42.4	14.9	50.1
25,0°	59.5	49.6	41.5	39.7	39.1	36.2	33.8	38.8	44.2	48.1	51.4	17.8	67.9
27,5°	69.3	54.7	43.3	42.1	42.1	42.7	46.3	52.6	46.9	50.2	49.0	21.3	89.2
30,0°	72.3	61.9	53.8	48.1	43.9	40.3	40.6	49.6	46.3	50.2	49.0	24.6	113.8
32,5°	90.2	73.8	56.5	49.9	49.6	47.8	47.2	50.2	45.1	47.2	47.8	29.0	142.8
35,0°	117.7	100.1	82.8	70.5	61.6	51.7	46.3	50.5	46.3	46.3	46.6	33.5	176.3
37,5°	124.9	111.2	95.0	84.6	70.2	55.9	48.1	55.3	53.8	52.0	52.0	37.2	213.5
40,0°	123.1	108.2	94.7	85.5	71.1	58.6	54.7	62.7	63.3	61.6	62.2	41.4	254.9
42,5°	121.6	107.6	95.0	86.7	72.6	60.1	55.0	63.3	64.8	63.9	64.5	45.1	300.0
45,0°	118.9	106.7	93.8	86.1	72.3	60.4	55.3	61.6	63.6	62.2	63.3	48.1	348.2
47,5°	113.5	103.7	92.0	84.9	71.7	59.2	54.1	60.1	62.2	59.5	61.6	50.5	398.7
50,0°	106.4	98.6	88.4	81.6	69.3	57.4	52.9	58.0	61.0	57.7	59.2	52.3	451.0
52,5°	97.7	93.8	84.9	78.3	66.3	55.0	50.5	55.6	57.7	53.8	55.6	53.7	504.6
55,0°	89.0	86.4	78.6	72.6	62.7	52.3	48.1	52.9	54.4	51.1	52.6	54.2	558.8
57,5°	80.4	78.9	72.3	68.1	59.8	49.9	45.1	48.4	50.8	47.2	49.0	53.5	612.4
60,0°	72.6	72.0	66.9	63.9	57.1	48.4	42.4	45.1	47.2	43.9	44.8	51.8	664.2
62,5°	64.8	65.1	61.9	61.0	55.3	47.2	39.4	41.2	43.3	40.3	40.6	48.9	713.0
65,0°	58.6	59.5	57.4	57.7	53.2	45.4	37.4	37.6	39.4	36.5	37.1	45.7	758.7
67,5°	52.9	54.1	52.6	54.1	50.5	43.3	35.3	34.1	35.0	32.9	32.9	41.9	800.6
70,0°	47.8	49.3	49.3	50.8	48.1	41.8	33.2	31.7	31.1	29.3	29.9	38.1	838.7
72,5°	42.4	43.6	43.9	45.7	43.6	38.2	32.0	29.3	28.1	26.0	26.3	33.5	872.2
75,0°	37.1	37.9	38.2	39.7	37.6	32.9	28.4	26.3	24.5	22.7	22.7	28.3	900.5
77,5°	31.4	31.7	31.4	32.9	31.1	27.2	23.6	22.1	21.2	19.1	19.1	22.5	923.0
80,0°	26.0	25.4	24.5	26.3	25.4	22.4	20.0	18.5	17.6	15.8	15.5	17.1	940.1
82,5°	22.1	20.3	19.7	21.2	20.3	18.8	17.0	15.8	14.6	13.4	12.6	12.9	953.0
85,0°	18.2	16.1	15.5	17.0	16.4	14.9	13.7	13.4	12.3	11.1	10.2	9.7	962.7
87,5°	14.6	12.0	11.4	12.8	12.8	12.3	11.4	11.1	10.5	9.0	7.8	7.4	970.1
90,0°	9.3	7.2	7.5	8.7	9.3	9.3	9.0	8.4	8.1	6.6	6.0	3.3	973.4
92,5°	7.5	5.7	5.7	6.6	7.2	7.2	7.2	6.9	6.3	5.4	4.8	2.7	976.1
95,0°	7.2	5.7	5.1	6.0	6.6	6.3	6.0	6.0	5.7	5.1	4.2	2.5	978.5
97,5°	6.6	5.4	4.8	5.4	5.7	5.7	5.4	5.4	5.1	4.5	4.2	2.3	980.8
100,0°	6.0	5.1	4.5	4.8	5.4	5.1	5.1	4.8	4.8	4.5	4.2	2.1	982.9
102,5°	5.7	4.8	4.2	4.5	4.8	4.8	4.8	4.8	4.5	4.2	4.2	2.0	984.9
105,0°	5.7	4.8	4.2	4.2	4.8	4.2	4.2	4.2	4.2	4.2	3.6	1.8	986.7
107,5°	5.1	4.5	4.2	4.2	4.2	4.2	4.2	4.2	4.2	3.9	3.6	1.7	988.5
110,0°	5.1	4.5	3.9	4.2	4.2	3.9	4.2	4.2	3.9	3.6	3.6	1.6	990.1
112,5°	4.8	4.5	3.9	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	1.5	991.6

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275KF14H + 5XA54000XSA EAN: 4058352835258 + 4058352161326	LP number 59107_28
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	6.6	6.6	6.9	6.9	6.9	6.6	6.6	6.3	6.3	6.6	6.6	6.6	6.9
117,5°	6.0	6.3	6.6	6.6	6.3	6.0	6.0	6.0	6.0	6.0	6.0	6.6	6.6
120,0°	6.0	6.0	6.0	6.0	5.7	5.7	5.4	5.4	5.7	6.0	6.0	6.0	6.3
122,5°	5.1	5.4	5.4	5.4	5.1	4.8	4.8	4.8	5.4	5.4	5.4	5.4	5.7
125,0°	4.2	4.2	4.2	4.2	4.2	4.2	3.9	3.9	4.2	4.2	4.2	4.2	4.2
127,5°	3.0	3.0	3.0	3.0	3.0	3.0	2.4	2.4	2.7	2.7	2.7	2.7	2.7
130,0°	1.8	1.8	1.8	2.1	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8
132,5°	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.5	1.5	1.5	1.2	1.8
135,0°	1.8	1.8	1.8	1.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
137,5°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.9	0.9	1.2	0.6
140,0°	1.5	1.2	1.2	1.2	0.9	0.9	0.9	0.6	0.9	0.6	0.6	0.6	0.6
142,5°	1.8	1.5	1.2	1.2	1.2	0.9	0.6	0.6	0.6	0.6	0.6	0.6	0.6
145,0°	1.2	1.2	1.5	1.2	1.2	1.2	1.2	0.6	0.6	0.6	0.6	0.6	0.6
147,5°	1.2	1.2	1.2	1.2	1.2	1.2	0.9	0.9	0.6	0.6	0.6	0.6	0.6
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275KF14H + 5XA54000XSA EAN: 4058352835258 + 4058352161326	LP number 59107_28
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	7.5	7.8	7.8	7.8	7.8	7.8	6.6	6.0	6.0	5.7	5.4	5.4	4.8
117,5°	7.2	7.5	7.8	7.8	7.8	7.8	6.0	6.0	5.4	5.4	5.1	4.8	4.8
120,0°	6.6	6.9	7.2	7.2	7.2	7.2	5.4	5.4	5.4	4.8	4.8	4.8	4.5
122,5°	5.7	6.3	6.6	6.6	6.6	6.6	5.1	4.8	4.8	4.5	4.2	4.2	4.2
125,0°	4.5	4.8	4.8	4.8	4.8	4.8	3.9	3.9	3.6	3.6	3.6	3.6	3.3
127,5°	3.0	3.0	3.0	3.0	3.0	3.0	2.7	2.7	2.7	2.7	2.7	2.7	2.4
130,0°	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	2.1	2.1	2.4
132,5°	1.2	1.2	1.5	1.5	1.5	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8
135,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.8	1.8	1.8	1.8	1.8	1.8	1.8
137,5°	0.6	0.6	0.6	0.6	0.6	0.6	1.2	1.5	1.8	1.8	1.5	1.8	1.8
140,0°	0.6	0.6	0.6	0.6	0.6	0.6	1.8	1.5	1.2	1.2	1.2	1.2	1.2
142,5°	0.6	0.6	0.6	0.6	0.6	0.6	1.2	1.2	1.2	1.2	1.2	1.2	1.2
145,0°	0.6	0.6	0.6	0.6	0.6	0.6	1.2	1.2	1.2	1.2	1.2	1.2	1.2
147,5°	0.6	0.6	0.6	0.6	0.6	0.6	1.2	1.2	0.9	1.2	1.2	1.2	0.9
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275KF14H + 5XA54000XSA EAN: 4058352835258 + 4058352161326	LP number 59107_28
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	4.8	4.5	3.9	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	1.4	993.0
117,5°	4.5	4.2	3.9	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	1.3	994.4
120,0°	4.2	3.9	3.6	3.3	3.0	3.0	3.0	3.3	3.6	3.6	3.6	1.2	995.6
122,5°	3.9	3.9	3.6	3.3	3.0	3.0	3.0	3.0	3.0	3.3	3.6	1.1	996.7
125,0°	3.0	3.0	3.0	3.0	2.7	2.4	2.4	2.7	3.0	3.0	3.0	0.8	997.5
127,5°	2.4	2.4	2.4	2.4	2.4	2.4	2.1	2.1	2.4	2.4	2.4	0.6	998.1
130,0°	2.1	2.1	1.8	1.8	1.8	1.8	1.8	1.8	1.8	2.1	1.8	0.4	998.5
132,5°	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	0.3	998.8
135,0°	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	0.3	999.1
137,5°	1.8	1.5	1.8	1.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.2	999.4
140,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.2	999.5
142,5°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.9	0.9	0.6	0.2	999.7
145,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	0.6	0.6	0.6	0.2	999.9
147,5°	1.2	1.2	1.2	1.2	1.2	0.9	0.9	1.2	1.2	0.6	1.2	0.1	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family CITY-LIGHT PLUS LED	Order number: 5XA5275KF14H + 5XA54000XSA EAN: 4058352835258 + 4058352161326	LP number 59107_28
Dimming levels table		environmental temperature: 25°C
siteco		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1030	10.0	10.4	10.2
95	241	252	977	9.5	9.9	9.7
90	229	250	929	9.0	9.3	9.2
85	216	248	876	8.5	8.8	8.6
80	203	246	823	8.0	8.3	8.2
75	190	243	770	7.6	7.7	7.6
70	178	241	722	7.1	7.3	7.2
65	165	238	669	6.6	6.8	6.7
60	152	235	616	6.1	6.4	6.2
55	140	232	568	5.7	5.9	5.8
50	127	229	515	5.3	5.5	5.4
45	114	225	462	4.8	5.0	4.9
40	102	221	414	4.4	4.6	4.5
35	89	216	361	4.0	4.1	4.0
30	76	210	308	3.6	3.7	3.6
30	75	209	304	3.5	3.7	3.6