

Photometric test report

Family
Floodlight 20 midi LED

Order number: 5XA7682D2C2AC
EAN: 4058352222713

LP number
58578_6



Version bracket for wall fastening
Optic asymmetric distribution PL61
Cover toughened safety glass
Lamps 1 x LED 4000K / CRI ≥ 70
 (unbekannt LED 4000K / CRI = 70)
Controlgear ECG-DALI
Rated values Net luminous flux = 18200 lm
 Power consumption = 142.0 W
 Luminous efficacy = 128.2 lm/W

serial
documentation
25.08.2021

siteco

Luminous intensity in cd/klm


C180-0

C190-10

C195-15

C270-90

Imax: 745 cd/klm

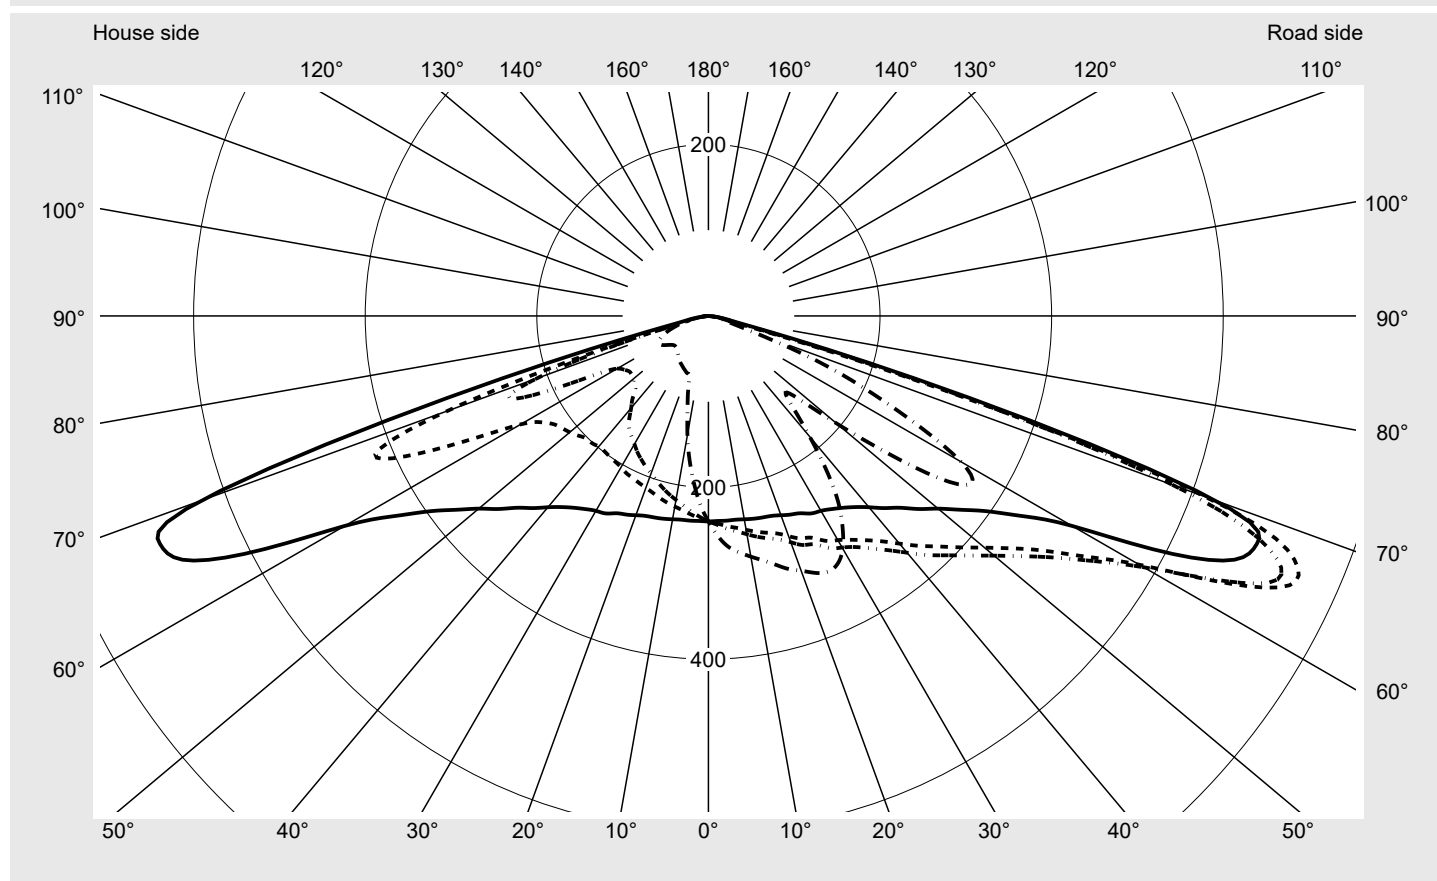

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	640.5
Imax 80°	24.8
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight 20 midi LED	Order number: 5XA7682D2C2AC EAN: 4058352222713	LP number 58578_6
---	---	-----------------------------

Envelope curve in cd/klm **KMK 65°** **KMK 62.5°** **KMK 60°** **KMK 57.5°** **siteco**



Photometric test report

Family Floodlight 20 midi LED	Order number: 5XA7682D2C2AC EAN: 4058352222713	LP number 58578_6
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5
2,5°	239.2	240.6	242.2	243.7	245.4	247.0	248.5	249.7	250.8	251.8	252.8	253.7	254.4
5,0°	239.5	242.7	245.9	249.0	251.9	254.7	257.2	259.4	261.3	263.0	264.5	265.8	266.9
7,5°	239.6	244.5	249.0	253.2	257.1	260.7	264.0	266.7	269.0	270.9	272.5	273.9	275.0
10,0°	240.7	247.3	253.2	258.3	262.9	266.8	270.2	272.8	274.8	276.2	277.6	279.1	280.5
12,5°	242.1	250.3	257.5	263.6	268.7	272.8	276.1	278.5	280.3	281.7	282.9	284.2	285.5
15,0°	243.2	253.2	261.6	268.3	273.6	277.7	281.0	283.8	286.1	287.9	289.3	290.5	291.6
17,5°	244.4	256.2	265.8	273.1	278.6	282.6	286.0	288.9	291.7	294.1	296.3	298.1	299.7
20,0°	247.2	262.0	273.1	280.6	285.3	288.9	292.0	294.9	297.5	300.4	303.7	306.4	308.1
22,5°	250.6	267.7	280.5	289.0	293.0	295.6	299.1	302.4	305.2	308.2	312.1	315.5	317.9
25,0°	253.7	271.8	285.2	293.6	298.4	302.0	305.7	309.5	313.2	316.6	319.7	323.6	326.3
27,5°	259.5	280.4	295.5	304.9	310.5	314.1	316.1	318.8	322.5	326.2	329.4	331.8	333.4
30,0°	262.3	285.3	301.7	311.7	318.2	323.2	326.6	328.9	330.9	334.2	335.4	334.9	332.8
32,5°	266.9	291.7	309.3	319.4	325.5	330.3	334.7	338.2	339.3	338.9	336.5	331.7	325.8
35,0°	273.0	300.4	319.1	330.7	337.7	342.5	346.3	348.7	347.4	340.9	331.9	324.2	315.2
37,5°	280.8	310.7	331.0	344.1	352.2	356.8	359.5	358.9	351.7	339.1	323.9	313.3	300.6
40,0°	291.0	324.4	346.4	360.2	368.8	374.4	376.5	369.9	354.1	333.7	312.4	293.8	275.9
42,5°	303.8	340.0	363.4	378.0	386.3	391.3	391.2	378.8	354.2	323.4	294.1	267.2	243.1
45,0°	316.2	356.0	380.1	394.5	403.2	407.8	401.4	380.8	347.9	309.8	273.1	238.7	207.4
47,5°	333.1	374.5	399.2	413.4	421.6	424.7	412.0	378.8	338.2	294.3	248.5	208.9	176.1
50,0°	349.4	394.1	420.1	434.7	442.0	440.1	418.4	377.5	326.4	275.1	222.7	184.4	169.2
52,5°	371.1	416.7	444.9	459.9	464.5	452.4	419.9	370.6	310.9	252.5	204.0	186.7	195.6
55,0°	396.9	446.5	476.8	490.8	491.6	467.2	422.8	361.7	293.9	233.1	204.4	210.0	235.1
57,5°	434.2	490.3	522.2	531.6	524.1	485.2	423.4	351.0	274.1	222.1	219.9	252.9	291.6
60,0°	489.5	549.8	579.9	585.8	565.7	508.8	430.4	338.9	258.8	233.1	262.9	299.7	321.7
62,5°	593.3	647.0	670.9	665.5	624.4	544.2	440.8	335.5	273.5	278.1	304.7	316.3	310.1
65,0°	673.3	726.9	744.7	729.6	673.5	579.4	465.3	363.6	317.2	316.8	319.7	306.5	282.1
67,5°	692.3	734.5	738.2	706.3	642.7	556.8	463.7	382.3	347.7	336.9	316.9	279.9	236.1
70,0°	629.0	640.5	619.1	578.0	519.0	457.0	394.4	353.3	340.5	324.9	286.4	233.9	198.5
72,5°	327.9	325.8	291.9	301.0	323.1	314.1	287.3	268.5	257.1	233.5	204.7	182.0	158.1
75,0°	97.0	63.1	54.8	75.1	154.3	189.6	178.5	152.6	113.5	87.4	107.1	102.2	86.8
77,5°	32.8	28.1	25.1	25.4	52.2	80.6	76.8	38.5	23.7	25.5	35.7	35.5	32.3
80,0°	20.7	17.4	17.1	16.6	19.5	24.8	19.4	13.3	12.8	13.0	14.2	16.7	16.3
82,5°	10.1	9.1	9.8	10.2	9.5	9.2	8.9	7.5	7.6	7.7	7.4	8.2	8.6
85,0°	3.6	3.2	3.4	3.4	3.3	3.4	3.4	3.4	3.4	3.4	3.2	3.2	3.1
87,5°	1.2	1.2	1.2	1.1	1.1	1.0	0.9	0.9	0.8	0.8	0.7	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight 20 midi LED	Order number: 5XA7682D2C2AC EAN: 4058352222713	LP number 58578_6
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5
2,5°	255.0	255.6	256.1	256.5	256.9	257.0	237.6	236.0	234.3	232.7	231.2	229.8	228.5
5,0°	267.7	268.3	269.0	269.7	270.2	270.3	236.0	232.3	228.7	225.1	221.6	218.2	215.0
7,5°	275.7	276.2	276.8	277.5	278.0	278.2	234.1	228.5	222.8	217.2	211.7	206.5	201.3
10,0°	281.4	282.1	282.9	283.9	284.6	284.9	233.4	225.6	217.7	209.9	202.2	194.8	187.6
12,5°	286.9	288.2	289.4	290.5	291.4	291.7	232.7	222.8	212.6	202.7	192.8	183.2	173.6
15,0°	293.1	295.1	297.1	298.7	299.6	299.8	231.8	219.5	207.0	194.8	182.8	171.1	159.1
17,5°	301.1	303.2	305.8	307.7	308.7	309.1	230.8	216.0	201.1	186.5	171.9	157.5	143.0
20,0°	309.2	310.8	313.6	315.4	316.0	316.0	230.5	213.1	195.5	178.2	160.7	143.4	127.2
22,5°	318.3	319.3	321.7	324.1	324.3	324.1	231.1	210.8	190.3	170.2	149.8	130.0	112.4
25,0°	327.4	327.5	328.5	330.3	329.8	329.1	232.1	208.5	184.8	161.1	138.0	116.2	95.6
27,5°	332.5	329.9	328.9	329.9	328.0	325.9	234.0	206.8	179.1	151.6	124.4	97.9	81.4
30,0°	329.4	323.9	321.5	321.3	317.4	313.1	234.1	203.6	172.4	141.4	106.9	82.4	76.2
32,5°	319.2	312.0	307.3	304.1	295.6	290.9	235.8	201.7	166.6	129.7	91.2	75.8	73.5
35,0°	305.5	295.3	287.6	278.7	266.3	263.1	238.3	200.3	161.0	115.5	79.9	72.0	70.9
37,5°	285.5	270.6	258.3	240.6	226.8	225.0	242.2	198.9	151.7	100.3	73.3	69.3	68.5
40,0°	255.6	237.1	219.7	195.2	185.0	183.7	248.0	198.8	140.1	85.3	68.2	66.5	65.9
42,5°	218.8	194.2	173.9	156.4	149.0	148.0	254.8	201.0	131.0	77.5	64.8	63.6	63.2
45,0°	181.0	156.7	141.7	130.5	126.7	127.1	263.3	201.7	120.4	71.4	61.7	60.7	60.4
47,5°	157.5	145.8	141.0	141.9	141.4	144.0	275.1	206.3	118.8	68.7	59.2	58.2	57.8
50,0°	172.0	175.4	180.4	188.9	191.2	194.6	287.2	210.9	113.6	65.4	56.6	55.6	55.1
52,5°	211.8	224.2	237.9	253.7	258.4	261.7	302.8	214.9	112.5	63.4	54.2	53.1	52.5
55,0°	265.3	288.2	308.0	327.0	329.2	331.6	321.4	220.0	112.7	61.3	51.8	50.5	50.0
57,5°	323.1	340.4	353.1	365.8	363.4	363.4	352.4	230.7	116.6	60.1	49.3	48.0	47.5
60,0°	331.5	333.4	339.3	346.1	339.9	339.9	397.0	252.7	122.8	59.8	46.9	45.5	45.0
62,5°	300.7	290.4	287.4	286.7	277.0	273.4	483.0	311.0	147.5	64.8	45.3	43.3	42.6
65,0°	253.4	227.2	212.9	212.7	205.1	203.4	568.9	385.2	207.0	89.5	46.7	41.7	40.4
67,5°	201.9	183.2	157.4	145.0	134.7	137.1	586.1	419.8	251.0	133.6	58.6	42.4	37.8
70,0°	179.3	159.0	76.7	59.5	55.4	61.0	469.1	325.6	213.5	120.4	59.8	44.4	36.6
72,5°	141.1	117.8	36.2	28.5	28.5	27.5	196.0	136.9	113.2	71.9	45.2	39.0	32.2
75,0°	76.2	62.7	25.0	21.1	20.9	19.7	57.7	36.1	37.9	34.6	27.7	25.8	23.8
77,5°	31.6	29.8	17.0	14.9	14.6	13.4	26.4	22.7	22.4	20.9	18.3	17.0	16.6
80,0°	14.2	13.2	10.0	9.3	8.7	8.1	18.9	15.6	13.6	13.0	11.9	11.2	11.1
82,5°	7.0	6.3	5.3	4.8	4.3	4.0	10.3	8.8	7.5	7.3	8.1	6.8	6.7
85,0°	2.6	2.3	1.9	1.7	1.7	1.6	3.8	3.4	3.2	3.3	3.7	3.4	3.3
87,5°	0.6	0.6	0.6	0.6	0.6	0.6	1.3	1.3	1.3	1.4	1.3	1.3	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight 20 midi LED	Order number: 5XA7682D2C2AC EAN: 4058352222713	LP number 58578_6
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	0.4	0.4
2,5°	227.2	225.9	224.6	223.6	222.7	221.9	221.2	220.5	220.1	219.9	219.9	2.9	3.2
5,0°	212.0	209.0	206.3	203.8	201.6	199.6	197.9	196.6	195.6	195.2	195.0	5.6	8.9
7,5°	196.3	191.7	187.4	183.4	179.7	176.5	173.7	171.6	170.0	169.2	168.9	8.3	17.1
10,0°	180.5	173.8	167.5	161.7	156.3	151.7	147.7	144.7	142.5	141.3	140.9	10.7	27.9
12,5°	164.1	154.9	146.3	138.5	131.5	125.6	120.8	117.2	114.6	113.1	112.6	13.1	40.9
15,0°	147.0	135.8	125.6	116.9	109.5	103.6	99.0	95.9	93.7	92.4	91.9	15.3	56.2
17,5°	129.3	117.1	105.9	95.3	87.4	82.1	78.6	76.3	75.0	74.1	73.9	17.4	73.6
20,0°	113.2	98.1	85.6	79.3	76.7	75.0	73.8	72.9	72.0	71.4	71.2	19.7	93.3
22,5°	95.0	82.3	78.1	76.5	75.2	73.9	72.6	71.5	70.5	69.8	69.6	22.2	115.5
25,0°	81.5	77.6	76.4	75.4	74.3	72.9	71.5	70.2	69.0	68.1	67.7	24.6	140.0
27,5°	77.2	75.9	75.2	74.4	73.3	71.9	70.3	68.8	67.5	66.4	65.8	27.0	167.1
30,0°	75.0	74.4	74.0	73.4	72.4	71.1	69.4	67.6	66.1	64.8	64.1	29.1	196.2
32,5°	73.0	72.8	72.7	72.3	71.5	70.1	68.3	66.4	64.7	63.1	62.3	31.0	227.2
35,0°	70.7	70.7	71.1	70.8	70.1	68.7	66.8	64.7	62.8	61.1	60.1	32.6	259.8
37,5°	68.4	68.7	69.0	68.9	68.3	67.0	65.2	63.0	60.9	58.9	57.7	33.9	293.7
40,0°	65.9	66.3	66.6	66.6	66.1	64.9	62.8	60.8	58.8	56.8	55.7	34.8	328.4
42,5°	63.2	63.5	63.8	64.2	63.5	62.2	60.9	59.1	57.1	55.1	53.9	35.4	363.8
45,0°	60.3	60.4	60.9	60.8	60.4	59.8	59.0	57.6	56.0	54.0	52.7	35.9	399.7
47,5°	57.5	57.6	57.6	57.5	57.5	57.4	57.2	56.6	55.4	53.4	52.3	37.4	437.1
50,0°	54.8	54.7	54.2	54.4	54.7	55.2	55.8	56.1	55.4	53.9	52.9	40.1	477.3
52,5°	52.3	51.8	51.5	51.8	52.6	54.0	55.8	57.1	56.9	56.1	55.4	44.0	521.3
55,0°	49.7	49.1	49.3	49.8	51.2	54.0	57.2	59.7	59.7	59.4	59.0	49.0	570.3
57,5°	47.0	46.7	47.1	48.1	50.3	54.9	60.1	63.2	62.8	62.9	63.2	54.1	624.4
60,0°	44.4	44.3	44.9	46.7	50.3	56.4	63.0	65.8	64.7	64.9	65.4	58.2	682.6
62,5°	41.9	41.8	42.6	45.2	49.8	56.6	63.2	65.4	63.8	64.3	64.7	62.7	745.4
65,0°	39.4	39.1	40.3	43.4	48.5	55.5	62.0	63.2	60.9	61.1	61.7	66.5	811.9
67,5°	36.2	35.8	37.1	40.3	45.6	52.7	58.1	58.5	55.7	55.6	56.0	65.8	877.7
70,0°	32.2	31.7	33.2	36.7	41.9	47.8	51.8	51.5	48.8	48.0	48.6	56.2	933.9
72,5°	27.3	26.7	28.3	31.5	36.0	40.7	43.3	42.4	39.8	38.7	39.9	35.2	969.1
75,0°	21.9	21.8	23.2	26.0	29.5	33.0	34.3	33.1	30.6	30.0	31.7	16.3	985.4
77,5°	16.5	16.7	17.8	19.8	22.4	24.6	25.4	23.9	21.9	21.5	22.1	7.4	992.8
80,0°	11.3	11.4	12.2	13.6	15.1	16.4	16.6	15.2	13.9	13.5	13.6	3.9	996.7
82,5°	6.7	6.8	7.2	7.7	8.1	8.4	8.2	7.5	6.9	6.7	6.7	2.1	998.8
85,0°	3.2	3.1	3.2	3.3	3.4	3.6	3.5	3.1	2.8	2.7	2.7	0.8	999.7
87,5°	1.2	1.2	1.1	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight 20 midi LED	Order number: 5XA7682D2C2AC EAN: 4058352222713	LP number 58578_6
---	---	-----------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	18200	142.0
95	241	252	17290	134.1
90	226	250	16380	126.2
85	211	247	15470	118.6
80	197	245	14560	111.1
75	185	242	13650	103.6
70	171	239	12740	96.3
65	157	236	11830	89.2
60	144	233	10920	82.2
55	130	230	10010	75.4
50	118	226	9100	68.6
45	106	222	8190	61.9
40	94	217	7280	55.3
35	81	212	6370	48.9
30	69	206	5460	42.6
25	57	199	4550	36.4
20	45	191	3640	30.3
15	34	181	2729	24.2