


# Photometric test report

<b>Family</b> <b>Streetlight 11 micro LED</b>	<b>Order number: 5XC1A31F08CE</b> <b>EAN: 4058352554418</b>	<b>LP number</b> <b>58065_131</b>
	<b>Version</b> post-top or side-entry mounting <b>Optic</b> asymmetric, wide distribution (ST1.2a) <b>Cover</b> transparent, PMMA <b>Lamps</b> LED 3000 K   CRI ≥ 80 <b>Controlgear</b> ECG SITECO iQ <b>Rated values</b> Net luminous flux = 1620 lm Power consumption = 12.6 W Luminous efficacy = 128.6 lm/W	<b>serial documentation</b> <b>16.01.2023</b>





**Luminous intensity in cd/klm** C180-0 C205-25 C210-30 C270-90 **Imax: 699 cd/klm**

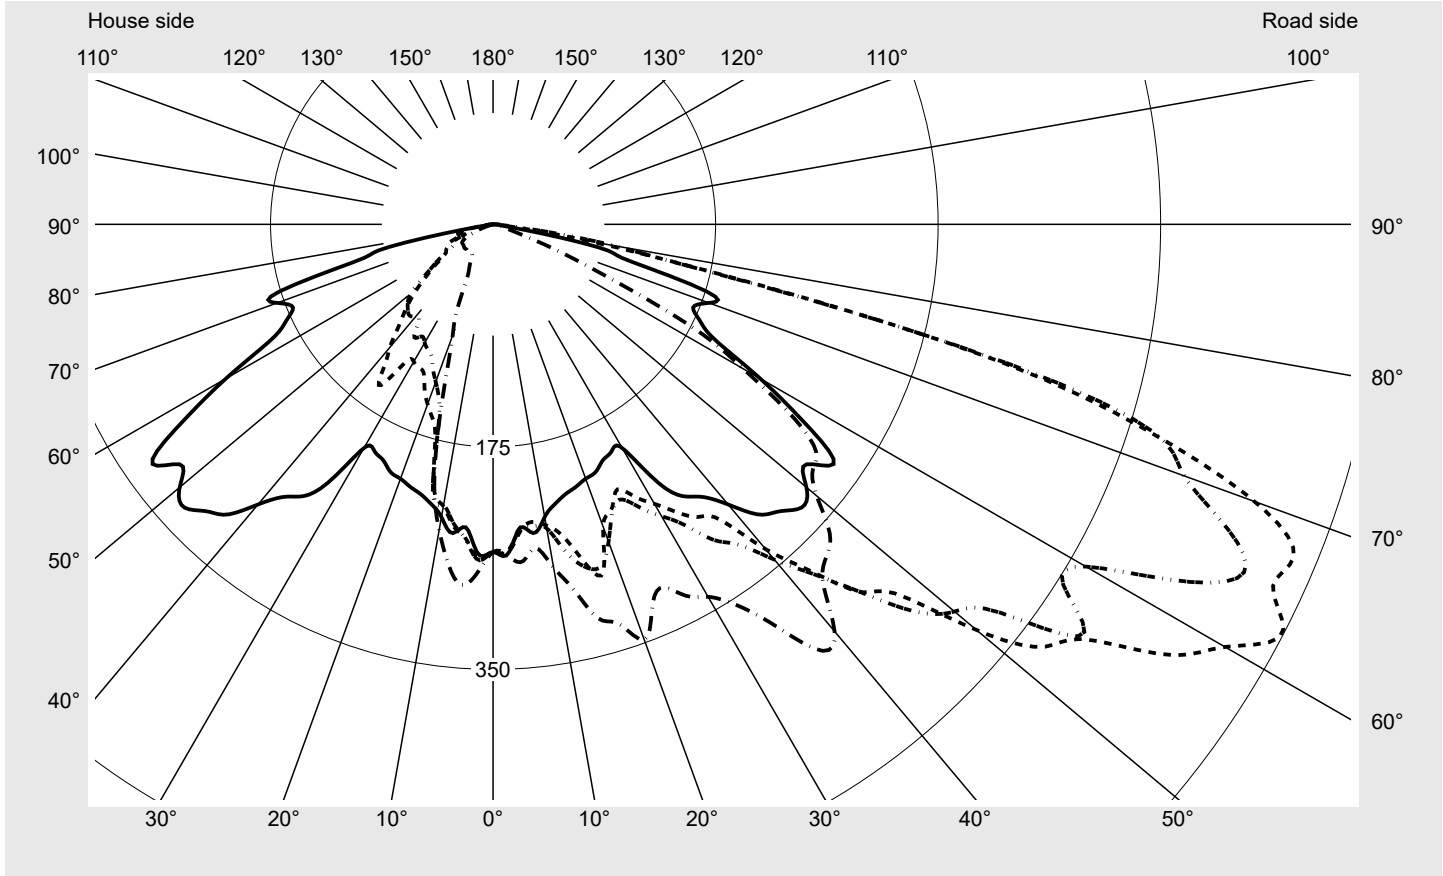


Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	637.5
Imax 80°	98.2
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

**Photometric test report**

<b>Family</b> Streetlight 11 micro LED	<b>Order number: 5XC1A31F08CE</b> <b>EAN: 4058352554418</b>	<b>LP number</b> 58065_131
---	--	-------------------------------

**Envelope curve in cd/klm**      **KMK 62.5°**    **KMK 60°**    **KMK 57.5°**    **KMK 55°**      **siteco**

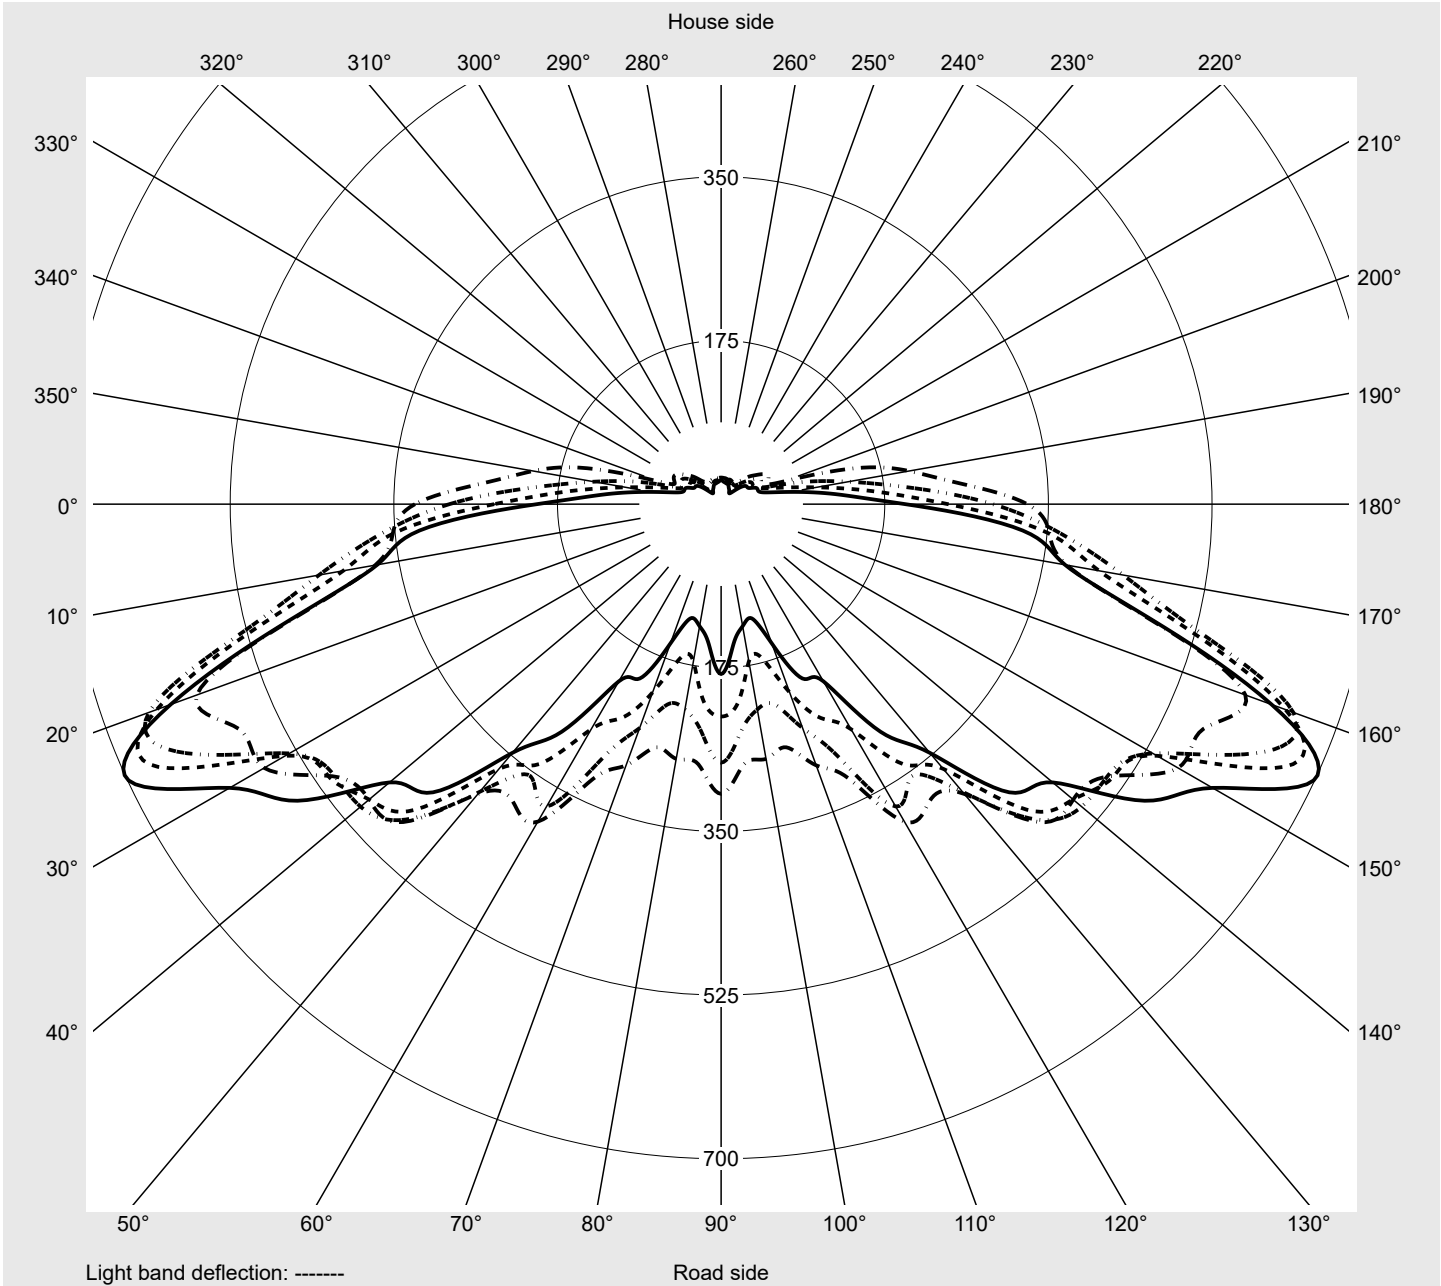

## Photometric test report

<b>Family</b> Streetlight 11 micro LED	<b>Order number: 5XC1A31F08CE</b> <b>EAN: 4058352554418</b>	<b>LP number</b> 58065_131
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7
2,5°	259.9	259.7	259.7	260.1	259.7	258.6	257.4	255.7	253.8	253.3	252.7	252.9	253.7
5,0°	239.6	238.9	237.5	239.1	243.2	242.7	240.8	244.6	250.6	256.3	263.1	271.3	271.3
7,5°	244.9	242.1	235.6	230.9	228.8	236.0	239.4	250.8	256.3	259.9	254.4	255.2	258.8
10,0°	233.7	243.2	241.5	238.9	240.0	240.4	242.7	243.0	250.6	255.7	265.4	267.5	278.3
12,5°	225.2	233.7	239.6	245.3	250.1	250.4	263.7	271.5	263.5	263.7	272.0	275.3	277.7
15,0°	219.7	229.0	247.6	256.3	265.0	273.9	278.9	272.2	267.7	271.1	272.8	264.7	275.6
17,5°	216.5	223.5	248.2	257.8	271.3	287.6	282.1	276.8	264.1	264.7	264.1	271.1	270.1
20,0°	212.9	224.3	235.6	241.9	249.3	252.9	265.6	273.9	277.0	265.4	250.6	254.8	274.5
22,5°	210.8	219.3	222.6	234.7	239.4	243.0	245.1	248.3	255.4	253.7	253.7	262.2	262.4
25,0°	204.6	216.7	224.8	227.7	230.5	230.3	238.7	255.2	263.5	262.2	277.0	272.4	278.5
27,5°	201.5	215.0	216.5	224.8	233.7	241.5	251.4	261.8	265.4	279.6	301.0	305.2	312.8
30,0°	203.0	214.8	220.7	231.7	244.7	253.8	265.0	270.1	283.8	299.2	324.7	337.6	348.1
32,5°	240.0	235.6	234.5	235.3	252.5	268.3	280.4	287.4	312.2	327.0	350.0	360.2	381.1
35,0°	261.0	262.6	256.5	255.9	264.3	281.0	303.1	310.9	322.3	347.3	367.4	382.6	402.5
37,5°	270.1	279.4	281.0	280.8	282.5	292.3	317.5	330.6	342.0	366.8	377.3	417.6	423.1
40,0°	287.6	289.7	295.7	308.3	316.2	333.5	344.3	342.9	362.1	396.0	398.7	425.6	460.3
42,5°	309.6	310.1	306.5	320.6	345.6	369.9	373.1	366.5	370.1	405.9	409.7	424.1	463.7
45,0°	319.1	326.6	339.9	375.4	394.1	408.9	409.3	397.9	403.0	408.5	412.3	421.8	444.0
47,5°	329.5	324.9	325.9	392.6	432.8	430.2	451.0	434.1	450.1	424.7	412.7	419.2	439.1
50,0°	321.7	337.0	337.0	403.0	489.7	496.5	473.8	484.8	475.1	452.0	430.2	413.1	420.5
52,5°	310.1	321.7	346.7	404.6	507.5	545.8	500.9	473.0	508.8	459.5	427.7	416.3	397.2
55,0°	327.4	352.3	375.6	473.9	596.6	568.9	564.2	507.3	491.6	480.8	404.6	388.3	392.0
57,5°	290.6	365.3	436.7	530.2	651.2	630.3	533.1	505.4	503.3	477.0	401.5	355.3	373.3
60,0°	242.7	350.2	410.5	516.6	642.3	664.7	538.2	510.5	491.4	462.0	369.5	339.3	277.9
62,5°	197.0	323.8	373.5	476.4	626.6	699.2	606.8	553.0	462.9	435.8	347.1	297.1	218.8
65,0°	179.5	280.2	343.1	404.0	556.8	676.6	650.6	531.2	454.6	415.7	339.3	267.7	193.9
67,5°	170.4	253.6	315.8	366.1	567.4	681.7	625.0	497.3	409.1	364.7	296.5	241.5	173.8
70,0°	180.7	254.0	305.9	356.9	500.0	637.5	578.2	458.2	366.5	303.9	243.8	186.5	151.1
72,5°	177.1	253.8	262.9	340.7	417.3	539.9	545.4	397.0	317.0	272.8	193.0	154.3	144.8
75,0°	110.7	201.4	253.0	322.9	326.5	401.9	408.9	286.5	228.6	201.1	142.4	135.5	132.5
77,5°	88.0	125.7	156.6	239.2	175.9	190.1	183.1	164.0	125.9	136.7	94.4	91.6	91.9
80,0°	24.5	28.1	39.4	78.7	68.8	80.0	96.1	98.2	94.9	89.3	52.1	31.7	29.0
82,5°	5.9	6.6	7.8	9.5	12.1	17.6	35.1	52.1	44.2	29.6	19.5	15.7	12.1
85,0°	4.2	4.4	4.7	5.5	6.8	8.0	8.7	9.7	9.9	9.1	8.5	7.6	7.2
87,5°	2.7	2.7	3.0	3.4	3.8	4.6	4.7	5.1	5.3	4.9	4.6	4.2	3.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> Streetlight 11 micro LED	<b>Order number: 5XC1A31F08CE</b> <b>EAN: 4058352554418</b>	<b>LP number</b> <b>58065_131</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7
2,5°	255.2	257.3	259.0	260.5	261.0	260.5	260.5	260.9	261.4	262.0	262.8	264.3	266.5
5,0°	271.1	267.7	264.7	264.1	266.0	266.2	241.5	243.6	246.1	247.0	247.8	248.5	247.0
7,5°	257.6	258.8	261.4	260.7	257.3	256.7	241.5	238.9	239.6	239.6	239.4	237.4	234.1
10,0°	278.1	274.7	268.3	265.0	270.1	274.1	225.6	221.4	223.7	228.4	224.8	224.5	220.5
12,5°	274.9	275.1	275.6	285.7	289.5	294.6	219.9	216.9	213.3	209.1	214.4	218.6	219.3
15,0°	280.8	283.8	297.3	315.8	317.9	321.1	215.7	202.3	195.1	186.0	175.7	167.2	166.3
17,5°	291.2	299.0	298.2	315.1	329.9	329.5	198.7	186.4	181.8	175.4	159.2	142.2	130.1
20,0°	271.3	289.1	297.8	313.2	341.0	347.7	199.8	181.6	168.9	161.5	150.5	131.8	120.4
22,5°	270.5	277.2	305.4	312.6	324.4	326.8	190.3	175.9	161.0	150.7	140.7	123.4	105.2
25,0°	282.8	301.6	307.7	314.7	328.2	315.1	190.9	167.2	157.3	140.3	129.1	114.5	102.6
27,5°	315.3	328.0	341.6	331.0	327.8	329.5	184.8	171.2	157.0	141.2	126.8	110.9	93.1
30,0°	362.3	355.3	351.3	350.0	344.3	338.2	189.8	175.4	158.7	140.1	124.7	107.5	87.6
32,5°	375.7	361.3	361.5	370.6	364.6	354.5	230.1	220.3	179.5	151.7	129.1	104.5	85.1
35,0°	399.3	383.3	385.8	390.0	393.9	384.1	253.1	241.5	199.8	175.5	154.7	108.1	82.5
37,5°	425.0	417.1	400.2	406.6	416.9	422.4	261.4	243.2	194.1	165.9	140.3	96.1	84.7
40,0°	456.3	428.4	401.5	377.8	394.5	417.8	293.1	265.8	201.9	175.2	126.3	94.8	88.7
42,5°	467.3	416.5	391.7	370.2	369.9	384.5	299.0	255.9	192.0	172.1	110.9	97.3	86.6
45,0°	479.8	431.7	387.1	364.9	366.5	370.4	313.6	262.0	196.8	154.1	99.2	94.8	89.7
47,5°	461.1	403.4	368.2	367.0	372.9	359.1	308.1	244.2	191.3	127.6	88.3	91.0	93.1
50,0°	420.3	371.2	331.2	323.8	346.4	332.1	295.6	240.4	177.4	103.5	76.8	84.0	77.5
52,5°	382.0	343.3	299.5	312.4	316.4	317.0	279.1	224.8	162.7	87.2	65.0	70.1	65.2
55,0°	324.2	297.3	269.2	276.6	279.2	309.8	255.9	204.2	148.4	70.5	54.8	58.4	55.9
57,5°	299.3	254.8	221.8	222.9	244.0	276.4	202.8	138.2	92.1	55.0	45.9	49.3	47.6
60,0°	252.3	214.2	171.2	170.8	212.1	227.1	161.3	103.5	68.4	49.7	42.7	39.6	40.0
62,5°	205.7	158.5	126.4	132.5	150.5	181.6	122.8	75.3	48.5	42.1	41.1	34.5	33.2
65,0°	152.2	108.4	88.3	87.6	107.1	106.9	112.6	58.0	45.9	38.3	38.1	32.4	33.0
67,5°	140.1	83.2	53.8	49.7	68.6	59.5	108.4	56.3	45.1	35.3	36.8	32.4	24.5
70,0°	131.4	69.2	38.1	24.1	29.0	25.4	106.4	59.1	44.9	35.6	29.6	24.1	22.2
72,5°	108.6	36.0	24.5	13.6	12.5	12.1	92.3	63.5	49.3	45.9	30.9	26.5	22.6
75,0°	79.2	24.6	15.2	10.4	9.3	9.1	63.1	60.5	59.0	37.2	30.1	28.4	20.1
77,5°	30.7	16.9	10.8	8.2	7.2	7.6	72.4	53.5	51.6	29.2	26.9	24.3	17.6
80,0°	16.3	11.4	7.8	6.1	5.3	5.3	20.5	23.7	21.0	16.1	15.7	17.3	18.6
82,5°	10.0	7.4	5.5	4.2	3.6	3.4	5.5	5.5	5.7	6.1	6.8	7.4	7.6
85,0°	5.7	4.4	3.0	2.3	1.9	1.9	3.8	3.6	3.6	3.8	4.0	3.6	3.6
87,5°	2.8	2.1	1.3	0.9	0.8	0.8	2.3	2.3	2.3	2.3	2.1	2.1	2.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> Streetlight 11 micro LED	<b>Order number: 5XC1A31F08CE</b> <b>EAN: 4058352554418</b>	<b>LP number</b> 58065_131
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	257.7	0.4	0.4
2,5°	268.8	270.9	274.5	277.0	277.5	276.0	273.9	274.7	275.5	274.3	273.7	3.1	3.5
5,0°	245.5	250.1	256.1	261.6	261.4	267.5	270.9	279.4	284.7	286.3	284.7	6.1	9.7
7,5°	229.8	233.2	242.3	242.1	245.1	253.5	255.9	257.4	260.5	266.2	269.6	8.9	18.5
10,0°	208.0	203.6	214.6	211.6	221.4	226.4	236.4	243.4	247.2	244.4	244.2	11.5	30.0
12,5°	218.2	195.3	193.7	187.1	184.6	196.0	205.9	219.7	225.4	218.2	213.5	14.1	44.1
15,0°	166.3	170.8	173.1	167.4	162.8	165.5	171.9	177.6	181.0	175.5	166.4	16.1	60.1
17,5°	130.1	136.5	137.8	132.1	125.5	138.0	139.5	135.7	127.4	120.4	120.2	17.5	77.7
20,0°	114.5	118.5	123.8	109.8	99.2	92.5	86.4	86.1	92.5	95.5	92.9	18.6	96.3
22,5°	98.6	102.2	108.4	91.0	83.2	76.0	72.0	70.3	67.1	66.0	76.2	19.6	115.9
25,0°	87.4	91.2	91.0	81.9	76.8	71.9	69.4	60.9	53.1	51.6	51.9	21.4	137.2
27,5°	79.8	70.7	64.8	63.9	60.3	61.2	59.7	49.3	45.7	42.8	41.3	23.6	160.9
30,0°	77.3	69.6	63.7	58.4	53.7	49.7	44.9	43.8	40.4	37.9	36.4	26.5	187.4
32,5°	73.4	67.5	62.2	54.8	46.3	41.1	38.3	36.0	34.9	33.0	31.5	30.2	217.6
35,0°	75.1	67.7	62.2	50.4	43.0	37.5	33.4	31.8	30.1	29.4	28.8	34.3	251.9
37,5°	76.4	67.1	59.0	49.3	42.7	37.2	31.5	29.4	28.2	28.4	28.1	38.0	289.8
40,0°	77.2	68.6	56.7	49.5	40.2	32.4	30.3	29.0	28.6	28.1	28.1	41.7	331.6
42,5°	79.4	66.0	57.6	47.2	39.6	33.2	29.0	29.0	28.4	28.4	29.2	44.5	376.1
45,0°	83.4	69.8	52.1	43.4	37.9	33.7	29.4	28.2	28.4	28.4	28.8	48.1	424.2
47,5°	81.1	61.8	48.2	40.0	35.6	32.8	29.4	28.2	28.4	28.2	28.8	50.5	474.7
50,0°	63.9	54.0	44.9	36.0	33.4	30.7	30.1	28.4	28.1	28.4	29.2	52.2	526.8
52,5°	56.1	48.5	38.3	32.0	29.8	30.3	29.4	28.6	28.1	29.4	28.8	52.9	579.7
55,0°	48.3	41.3	32.8	29.0	27.1	27.1	27.9	27.3	27.9	28.2	28.4	54.3	634.0
57,5°	40.2	33.0	27.3	24.5	25.0	25.8	26.4	26.7	27.9	27.7	28.4	53.7	687.7
60,0°	35.6	25.6	20.3	19.7	20.7	22.6	24.3	25.8	26.0	26.7	28.1	50.9	738.6
62,5°	29.4	21.2	15.5	14.8	17.3	19.3	22.0	22.7	23.5	24.5	25.8	48.0	786.6
65,0°	22.9	17.3	13.6	12.7	14.2	16.9	19.7	19.9	21.2	22.6	22.0	44.5	831.0
67,5°	20.5	15.5	12.5	11.2	11.9	13.6	15.2	15.5	16.3	15.9	15.5	41.4	872.4
70,0°	19.0	14.2	11.6	10.4	9.9	10.4	10.4	11.0	11.2	10.2	9.9	37.7	910.1
72,5°	16.9	12.7	9.9	8.7	8.0	8.0	7.6	7.2	7.0	4.2	3.8	33.7	943.8
75,0°	14.4	11.6	8.7	7.0	6.4	5.7	5.3	4.6	3.4	0.9	0.8	26.9	970.8
77,5°	11.6	8.5	6.8	5.7	4.7	4.4	3.4	4.0	1.9	0.8	0.4	16.9	987.6
80,0°	13.1	7.2	4.9	4.2	3.4	2.8	2.7	2.8	1.3	0.4	0.4	7.8	995.4
82,5°	6.6	4.9	3.8	3.0	2.7	1.9	1.5	1.5	0.8	0.4	0.4	2.8	998.2
85,0°	3.2	2.7	1.9	1.7	1.5	1.1	0.9	0.8	0.4	0.4	0.4	1.2	999.4
87,5°	1.7	1.5	1.3	0.9	0.9	0.8	0.8	0.4	0.4	0.4	0.4	0.7	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 11 micro LED	<b>Order number: 5XC1A31F08CE</b> <b>EAN: 4058352554418</b>	<b>LP number</b> 58065_131
---	--	-------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1620	12.6	12.9	12.8
95	241	252	1537	12.0	12.3	12.2
90	229	250	1461	11.4	11.7	11.6
85	216	248	1378	10.8	11.0	10.9
80	203	246	1295	10.1	10.4	10.2
75	190	243	1212	9.6	9.8	9.7
70	178	241	1135	9.0	9.2	9.1
65	165	238	1052	8.4	8.6	8.5
60	152	235	969	7.8	8.0	7.9
55	140	232	893	7.3	7.5	7.4
50	127	229	810	6.8	6.9	6.8
45	114	225	727	6.2	6.3	6.2
40	102	221	651	5.7	5.8	5.8
35	89	216	568	5.1	5.2	5.2
30	76	210	485	4.6	4.7	4.6
25	63	203	402	4.1	4.1	4.1
20	51	195	325	3.3	3.4	3.4
16	40	186	255	2.7	2.8	2.8