




Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3B41E08ME EAN: 4058352584033	LP number 59338_130
	Version post-top or side-entry mounting Optic asymmetric, extremely wide distribution (ST0.5a) Cover transparent, PMMA Lamps LED 4000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 18720 lm Power consumption = 124.7 W Luminous efficacy = 150.1 lm/W	serial documentation 17.08.2022





Luminous intensity in cd/klm C180-0 C192.5-12.5 C195-15 C270-90 **Imax: 627 cd/klm**

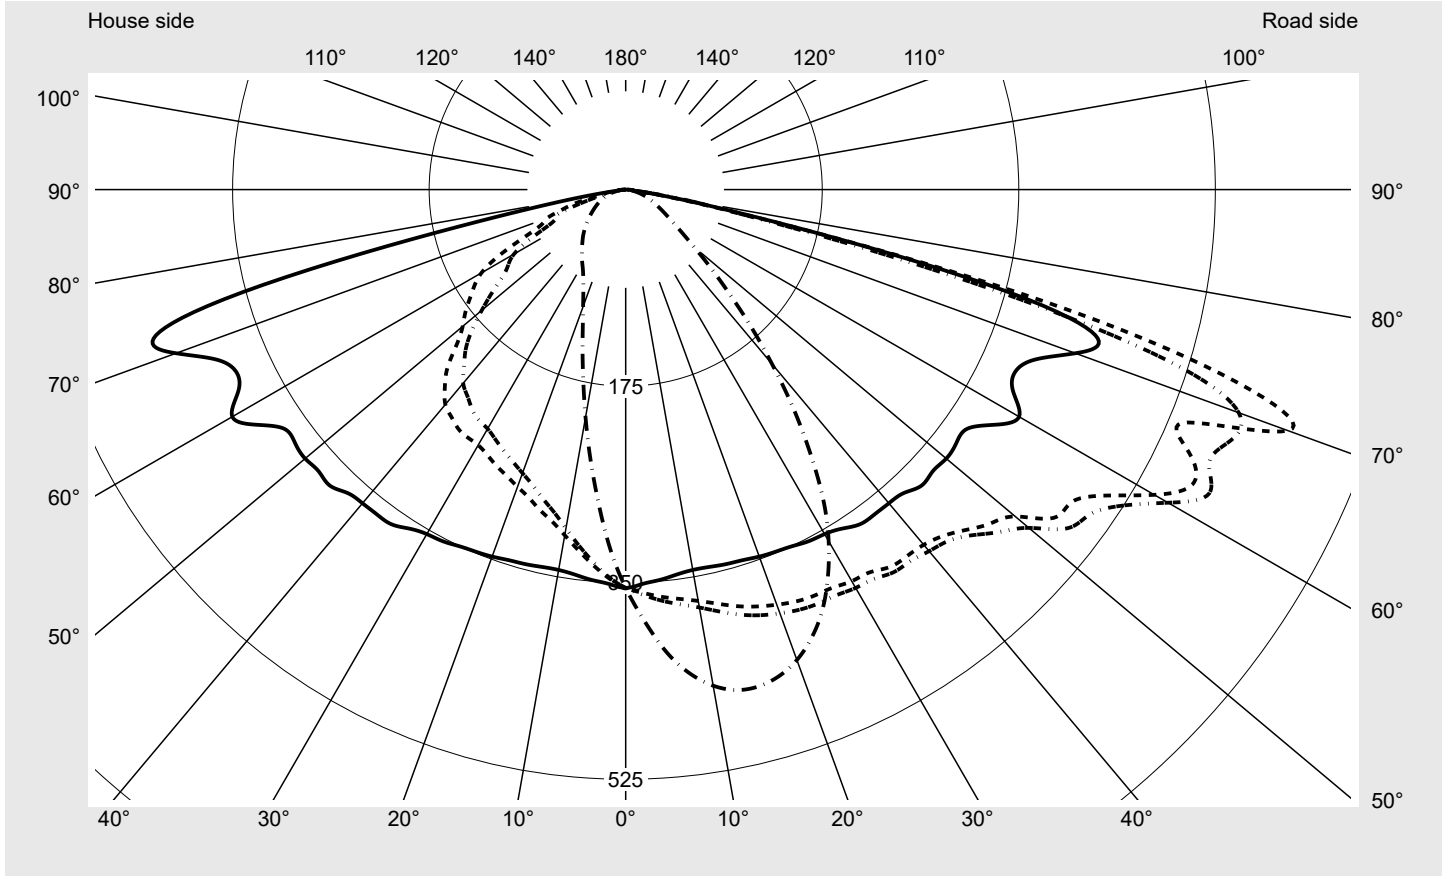

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2


Class:	G3
Imax 70°	627.5
Imax 80°	70.6
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3B41E08ME EAN: 4058352584033	LP number 59338_130
--	--	-------------------------------

Envelope curve in cd/klm **KMK 70°** **KMK 67.5°** **KMK 65°** **KMK 62.5°** **siteco**

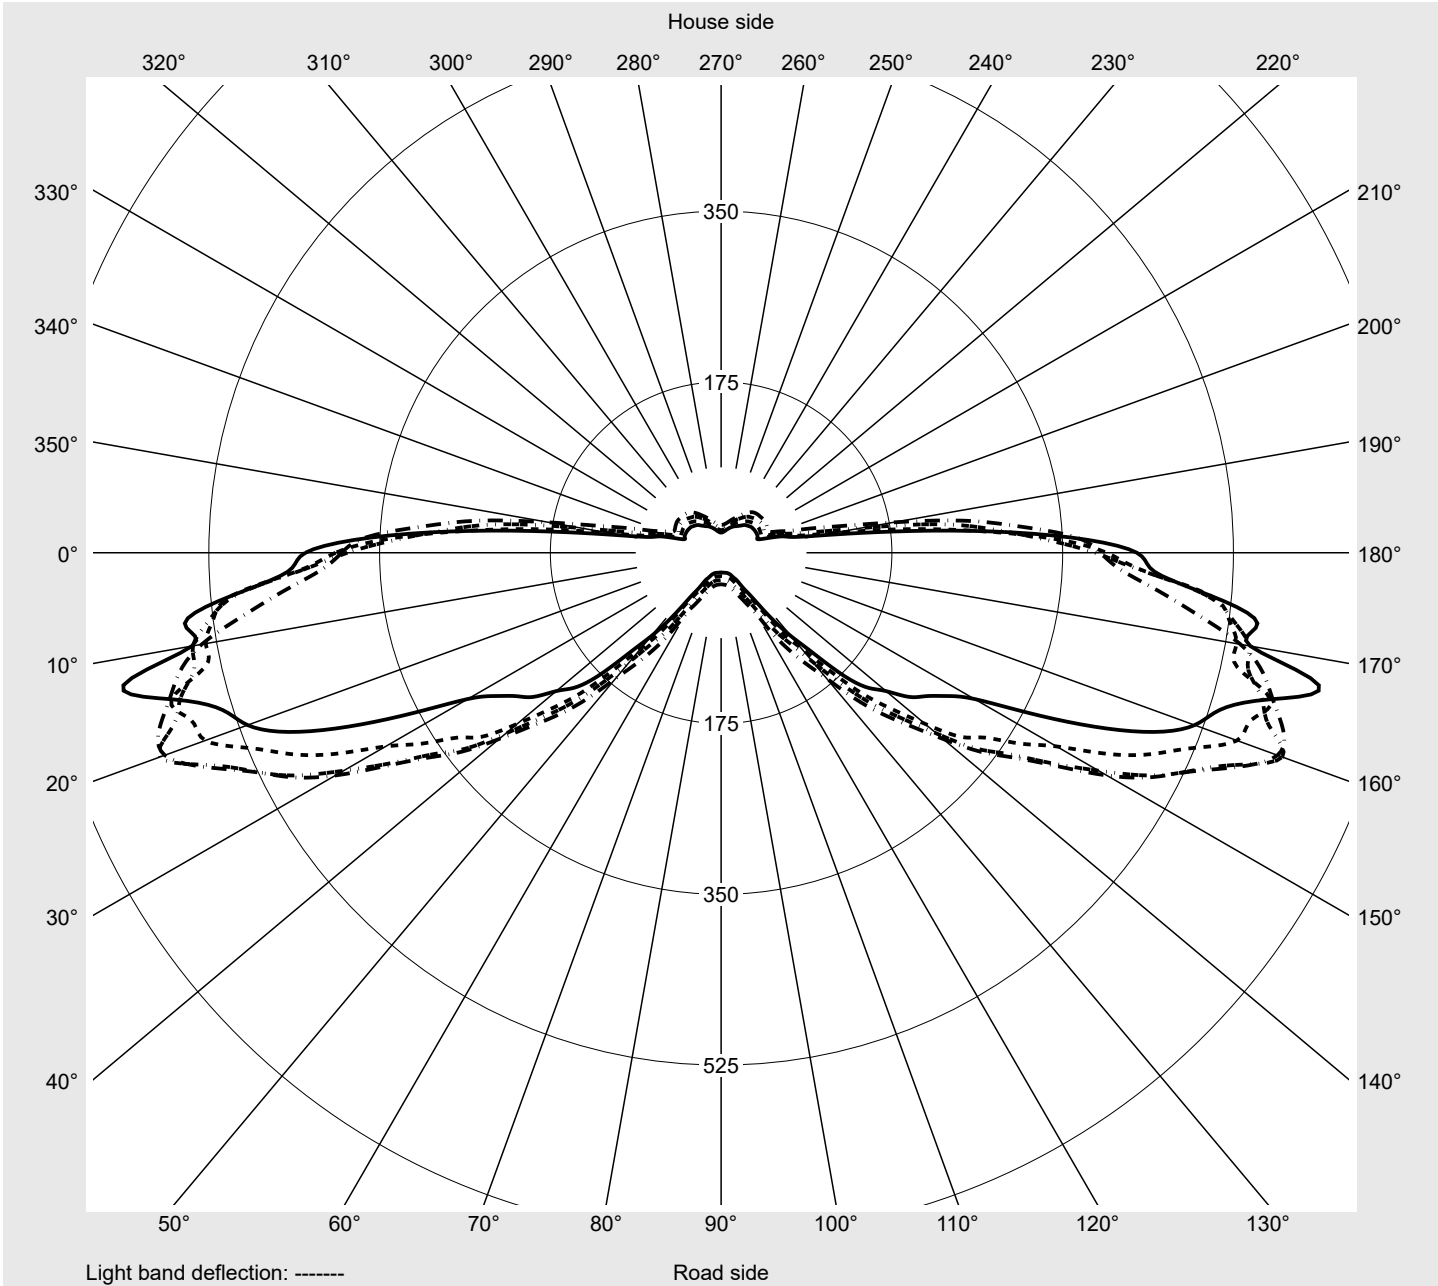

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3B41E08ME EAN: 4058352584033	LP number 59338_130
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6
2,5°	351.4	352.5	353.9	355.6	357.6	359.5	361.3	363.0	364.7	366.2	367.7	369.0	370.2	371.3	372.1
5,0°	348.9	351.4	354.1	356.9	360.4	363.9	367.4	370.5	373.3	376.1	378.9	381.4	383.7	386.0	388.2
7,5°	345.8	349.9	353.9	358.1	362.8	367.6	372.5	376.7	380.9	384.7	388.3	391.8	394.9	398.1	401.0
10,0°	343.9	349.5	354.8	360.2	366.0	371.9	377.8	383.3	388.2	392.8	397.0	400.9	404.6	408.4	411.6
12,5°	344.1	351.1	357.8	364.1	370.8	377.7	384.7	390.7	396.2	401.1	405.6	409.8	413.7	417.5	420.9
15,0°	345.2	354.0	361.7	368.8	376.4	384.0	391.8	398.4	404.4	409.7	414.4	418.6	422.4	426.1	429.4
17,5°	346.0	355.9	364.6	372.8	380.9	389.2	397.4	404.5	411.2	416.8	421.8	426.0	430.1	433.7	436.8
20,0°	347.7	358.7	368.2	376.5	385.1	393.3	401.5	409.0	415.8	421.3	426.1	430.2	433.9	437.4	440.2
22,5°	348.9	361.4	371.2	380.1	388.6	396.9	404.8	412.0	418.8	424.3	428.6	432.1	435.0	437.6	439.8
25,0°	350.4	363.3	373.7	382.5	390.9	398.7	406.5	413.3	419.5	424.4	428.6	431.9	434.0	436.1	437.7
27,5°	352.9	365.9	376.2	384.4	392.1	399.5	407.0	413.8	419.9	424.9	428.2	430.6	432.0	432.8	432.9
30,0°	354.2	367.9	378.8	387.7	395.7	402.6	409.5	415.3	420.2	423.9	426.8	428.7	429.5	429.0	427.5
32,5°	358.0	371.5	382.4	390.4	397.6	404.1	411.0	417.3	422.7	425.9	427.3	427.3	425.9	423.9	421.1
35,0°	363.7	377.0	387.3	395.7	403.4	410.2	415.9	419.9	422.5	425.1	426.9	427.3	425.5	420.1	413.9
37,5°	364.3	377.7	389.3	398.9	406.3	411.4	416.7	422.4	427.3	429.7	428.0	423.2	419.2	416.0	409.9
40,0°	364.6	378.1	389.8	399.3	406.4	412.9	420.3	425.6	426.9	424.4	422.6	422.1	420.2	411.6	398.9
42,5°	366.5	379.9	392.5	403.5	411.2	418.3	424.5	427.4	427.0	426.9	425.5	419.9	411.2	402.8	395.4
45,0°	372.6	385.7	398.3	410.3	420.6	428.5	435.3	438.7	439.0	436.5	431.8	423.9	412.3	400.5	384.3
47,5°	371.0	387.0	402.4	416.3	428.2	440.2	451.2	458.3	456.0	448.1	441.4	430.6	417.1	403.2	383.6
50,0°	372.6	387.9	404.4	420.9	436.1	452.8	468.6	473.6	471.1	465.5	456.1	442.1	421.8	402.4	379.2
52,5°	371.0	392.3	409.5	430.5	456.6	480.2	495.4	494.1	483.8	477.1	468.3	454.5	432.5	408.2	381.1
55,0°	371.3	393.3	411.6	428.4	456.6	484.9	504.4	511.3	506.2	496.1	482.6	462.3	434.6	408.8	385.8
57,5°	389.7	406.7	435.2	459.5	484.3	507.0	523.8	528.6	523.9	504.5	487.9	466.5	436.1	403.9	376.6
60,0°	404.5	420.8	453.9	486.2	524.6	543.5	557.6	571.4	566.2	534.5	502.7	479.6	451.2	407.2	372.6
62,5°	388.9	410.8	450.0	494.0	540.4	568.8	585.8	603.9	606.7	573.4	530.7	498.0	456.4	406.2	365.9
65,0°	383.0	433.0	499.0	529.1	549.6	553.2	573.4	588.6	612.0	568.5	529.6	494.3	446.7	401.4	359.8
67,5°	395.1	434.6	503.0	525.1	536.3	541.9	583.3	569.7	562.5	522.9	487.9	446.4	396.9	364.2	330.4
70,0°	426.1	444.5	503.1	554.4	550.7	627.5	580.9	535.8	516.4	479.9	421.6	355.7	299.7	273.3	256.2
72,5°	440.7	442.5	505.1	561.0	554.6	570.8	505.6	448.7	436.3	393.6	315.4	246.7	202.7	179.6	161.8
75,0°	353.4	353.2	367.5	449.0	400.5	388.9	318.4	282.4	270.2	255.8	213.4	173.4	150.4	138.4	122.7
77,5°	153.0	205.1	206.9	212.1	170.9	150.7	128.2	120.2	120.9	126.0	124.3	112.0	102.4	92.8	76.5
80,0°	50.0	70.6	61.8	49.7	44.1	45.7	58.2	61.5	58.1	51.4	54.3	52.5	46.8	41.2	34.1
82,5°	10.3	10.3	10.4	10.8	11.5	13.2	15.9	13.6	14.2	12.7	13.7	12.2	11.3	10.9	10.4
85,0°	6.2	6.3	6.4	6.4	6.4	6.4	6.4	6.3	6.2	6.0	5.9	5.7	5.5	5.4	5.2
87,5°	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.1	3.1	3.0	2.9	2.8	2.8	2.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3B41E08ME EAN: 4058352584033	LP number 59338_130
--	--	-------------------------------



Table of values for luminous intensities Maximum luminous intensity

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6
2,5°	373.1	374.3	375.4	376.3	377.2	378.1	379.2	380.1	380.9	381.5	382.2	382.5	382.8	382.9	383.1
5,0°	390.2	392.4	394.6	396.6	398.4	400.1	401.9	403.5	405.1	406.4	407.6	408.5	409.2	409.8	410.4
7,5°	404.0	406.9	409.7	412.2	414.6	416.9	419.1	421.3	423.2	424.9	426.4	427.7	428.8	429.8	430.6
10,0°	414.9	418.2	421.3	424.0	426.6	429.1	431.5	433.9	436.1	437.9	439.7	441.0	442.4	443.6	444.7
12,5°	424.3	427.4	430.5	433.3	435.8	438.1	440.3	442.4	444.3	446.0	447.5	448.9	450.3	451.4	452.5
15,0°	432.4	434.9	437.5	439.7	441.8	443.6	445.2	446.8	448.1	449.4	450.5	451.4	452.3	453.3	454.4
17,5°	439.5	441.5	443.0	444.1	445.2	446.1	446.6	447.3	448.0	448.5	449.2	449.5	450.0	450.5	451.1
20,0°	442.5	444.2	445.6	446.4	446.6	446.3	445.8	445.0	444.4	444.0	443.7	443.5	443.5	443.4	443.5
22,5°	441.4	442.5	443.3	443.5	443.4	442.7	441.4	439.7	437.6	435.5	433.9	432.7	431.7	431.0	430.4
25,0°	438.0	437.9	437.5	436.5	435.5	434.2	432.2	429.5	426.4	423.1	420.1	417.5	415.6	414.3	413.1
27,5°	432.0	430.3	428.5	426.4	423.9	421.2	418.0	414.1	409.6	404.9	400.8	397.1	394.1	391.8	390.3
30,0°	424.3	421.1	417.3	413.5	409.4	404.7	400.0	394.2	388.3	382.2	377.1	372.6	369.0	366.0	364.1
32,5°	416.4	411.0	405.2	399.1	392.4	385.5	378.5	371.0	363.7	356.4	349.8	343.8	339.5	336.4	333.7
35,0°	407.1	399.5	391.2	383.1	374.4	365.2	355.9	345.6	336.1	326.9	318.7	311.6	305.8	301.1	297.7
37,5°	398.9	387.2	377.6	368.5	357.6	345.6	333.3	320.6	309.2	297.8	288.0	279.8	272.8	266.4	261.4
40,0°	388.6	377.7	363.4	350.5	338.1	323.8	309.4	294.9	281.7	269.4	258.6	248.9	240.1	232.1	225.1
42,5°	379.2	360.5	347.3	333.0	315.9	301.4	286.9	272.2	257.8	244.2	231.8	220.1	209.5	200.4	192.6
45,0°	365.4	350.4	331.0	312.4	298.3	281.2	265.0	248.4	233.3	218.4	204.6	191.6	180.5	170.9	162.5
47,5°	362.9	340.3	318.3	301.3	276.8	261.3	243.9	225.2	209.7	194.5	180.2	167.1	155.9	146.2	137.3
50,0°	358.5	332.7	308.1	282.4	259.1	239.4	221.4	202.3	184.7	169.9	156.6	144.4	133.2	123.0	113.7
52,5°	352.1	321.5	295.1	264.4	238.8	217.9	199.1	178.1	159.4	147.4	136.2	124.6	113.4	103.0	93.8
55,0°	356.2	320.6	284.5	247.5	219.6	197.7	175.7	154.3	140.6	126.9	117.0	105.7	94.7	84.5	75.9
57,5°	347.0	311.5	276.9	244.0	214.2	192.1	163.1	139.5	125.2	111.5	98.1	87.0	76.7	67.7	60.7
60,0°	344.3	308.6	273.8	243.2	217.0	186.5	153.9	129.8	113.3	97.9	80.8	69.3	60.8	53.8	48.7
62,5°	334.9	296.8	262.4	233.7	202.4	168.2	143.9	121.9	98.3	72.4	61.5	53.8	47.9	43.2	39.6
65,0°	329.6	288.2	251.2	219.6	182.4	145.9	118.5	99.9	75.6	58.4	48.8	42.7	38.2	34.9	32.5
67,5°	310.0	272.8	237.0	203.4	161.9	127.5	103.9	68.6	52.6	43.6	38.1	34.0	30.6	28.2	26.6
70,0°	242.7	220.5	205.0	179.0	139.2	111.9	84.9	57.0	44.3	33.6	29.5	26.4	24.1	22.8	21.9
72,5°	159.0	155.2	154.1	140.7	110.4	96.1	59.4	43.8	33.2	25.7	21.4	19.6	18.8	18.2	17.8
75,0°	105.3	97.6	92.3	83.4	66.5	53.3	32.1	32.0	22.5	17.9	16.4	15.4	14.7	14.3	14.2
77,5°	63.0	57.1	49.0	45.4	40.8	27.8	21.4	19.6	14.2	13.3	12.6	12.0	11.5	11.1	10.9
80,0°	26.2	24.3	22.6	17.3	14.0	13.2	14.1	12.7	10.2	9.6	9.2	8.8	8.5	8.3	7.9
82,5°	9.1	8.7	8.5	7.7	7.5	7.3	7.0	6.8	6.6	6.4	6.2	6.0	5.8	5.7	5.4
85,0°	5.1	5.1	4.9	4.8	4.6	4.5	4.3	4.1	3.8	3.6	3.3	3.2	3.1	3.1	3.1
87,5°	2.6	2.6	2.6	2.5	2.4	2.4	2.3	2.1	2.0	1.9	1.7	1.6	1.5	1.4	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3B41E08ME EAN: 4058352584033	LP number 59338_130
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6
2,5°	383.3	383.7	383.9	384.1	384.4	384.6	384.6	350.3	349.1	348.2	347.1	346.3	345.3	344.5	343.4
5,0°	410.9	411.5	412.0	412.5	412.8	412.9	413.0	345.8	343.2	340.5	337.9	335.3	332.8	330.2	327.6
7,5°	431.5	432.2	432.9	433.5	433.8	434.1	434.2	341.3	336.8	332.3	327.9	323.8	319.6	315.5	311.4
10,0°	445.6	446.5	447.2	447.9	448.2	448.4	448.5	337.4	331.0	324.7	318.4	312.5	306.3	300.4	294.5
12,5°	453.6	454.4	455.1	455.7	456.0	456.3	456.4	335.6	327.3	319.0	310.7	302.7	294.3	286.4	278.5
15,0°	455.0	456.0	456.7	457.1	457.5	457.8	457.9	334.9	325.0	315.1	304.9	295.3	284.9	275.3	265.6
17,5°	451.8	452.6	453.0	453.5	453.8	454.1	454.2	334.1	322.2	310.6	298.8	287.4	275.8	264.6	253.7
20,0°	443.6	443.9	444.5	444.9	445.2	445.6	445.7	334.7	321.0	307.6	294.2	281.6	268.7	256.5	244.3
22,5°	430.4	430.2	430.5	431.0	431.5	431.9	432.2	334.3	319.4	304.8	289.9	276.2	262.3	249.2	235.9
25,0°	412.3	412.0	412.1	412.5	413.1	413.6	413.9	334.9	318.3	302.2	286.3	271.6	256.6	242.5	228.4
27,5°	389.1	388.4	388.2	388.5	389.1	389.7	389.7	335.8	318.1	300.0	282.3	266.5	251.0	235.8	220.2
30,0°	362.6	361.1	360.4	360.3	361.0	361.4	361.4	336.2	317.0	297.2	278.7	262.7	245.9	229.2	212.9
32,5°	331.4	329.3	327.8	327.2	327.3	327.6	327.5	339.9	318.9	297.4	278.0	261.8	243.4	224.7	206.7
35,0°	294.4	291.3	289.0	287.7	287.2	286.8	286.5	345.0	322.6	299.4	278.5	259.9	238.5	217.9	200.2
37,5°	257.2	253.2	250.0	247.8	246.4	245.4	244.8	344.9	321.1	295.9	274.5	255.0	231.6	210.9	194.7
40,0°	219.8	215.0	210.8	207.3	204.9	203.3	202.6	346.8	318.7	290.9	270.8	249.9	225.0	206.1	189.9
42,5°	186.1	180.1	174.7	170.2	167.0	165.0	164.3	344.6	311.6	282.4	262.5	238.4	213.1	196.7	175.7
45,0°	154.9	147.6	141.1	135.8	132.3	130.1	129.4	351.4	311.5	280.5	256.6	224.4	201.5	183.0	155.7
47,5°	128.9	120.9	114.0	108.3	104.6	102.5	101.8	346.0	301.3	268.4	238.5	203.9	185.9	156.3	131.4
50,0°	105.2	97.1	90.4	85.0	81.7	79.9	79.4	347.9	301.8	263.6	223.8	189.5	167.3	133.0	118.1
52,5°	85.4	77.8	72.0	67.7	65.4	64.0	63.6	341.1	290.7	250.0	209.8	180.0	149.3	122.3	106.1
55,0°	68.5	62.2	57.8	55.1	53.6	52.7	52.4	340.1	283.3	239.2	197.9	169.5	132.8	111.5	89.8
57,5°	54.8	50.5	47.5	45.8	44.9	44.2	44.1	358.4	294.5	241.3	192.4	159.8	123.7	100.2	78.5
60,0°	45.0	42.0	40.1	39.0	38.4	37.9	37.7	372.1	308.5	252.4	192.2	148.3	114.8	84.3	72.6
62,5°	37.1	35.2	33.9	33.2	32.8	32.5	32.4	363.9	307.8	251.7	179.4	126.8	96.8	75.1	64.4
65,0°	30.8	29.6	29.0	28.6	28.4	28.1	28.0	328.8	277.9	223.9	145.5	98.0	76.2	64.3	53.4
67,5°	25.7	25.1	24.7	24.4	24.2	24.0	23.9	338.6	259.4	184.3	115.3	80.8	67.7	56.0	47.4
70,0°	21.4	21.0	20.8	20.6	20.4	20.3	20.2	358.6	257.2	162.1	101.4	74.6	64.8	49.8	40.4
72,5°	17.4	17.2	17.1	16.9	16.7	16.6	16.6	335.2	240.6	184.7	112.8	59.2	46.1	34.5	33.5
75,0°	14.0	13.8	13.7	13.5	13.3	13.3	13.2	268.1	215.0	161.6	101.7	45.0	29.4	26.2	27.3
77,5°	10.7	10.5	10.3	10.2	9.9	9.8	9.6	138.3	134.3	95.9	50.4	21.9	19.1	19.8	21.0
80,0°	7.6	7.4	7.2	7.0	6.9	6.8	6.7	61.0	45.2	28.8	25.5	18.3	12.8	13.6	14.7
82,5°	5.1	4.9	4.7	4.6	4.5	4.4	4.3	10.1	9.2	8.6	8.2	7.8	7.8	8.1	8.4
85,0°	3.0	2.8	2.7	2.6	2.5	2.4	2.3	5.8	5.8	5.6	5.3	5.1	4.9	4.7	4.5
87,5°	1.2	1.2	1.2	1.1	1.0	0.9	0.9	3.2	3.1	3.0	2.9	2.8	2.7	2.7	2.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3B41E08ME EAN: 4058352584033	LP number 59338_130
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6
2,5°	342.5	341.5	340.5	339.1	337.4	335.7	334.2	333.3	332.3	331.4	330.5	329.4	328.5	327.5	326.8
5,0°	325.2	322.7	320.1	317.2	314.2	311.3	308.6	306.2	304.0	301.8	299.7	297.6	295.6	293.7	292.1
7,5°	307.3	303.1	299.0	294.8	290.5	286.4	282.4	278.9	275.6	272.4	269.2	266.2	263.4	260.7	258.3
10,0°	288.8	283.1	277.6	272.1	266.4	261.3	256.3	251.6	247.3	243.1	239.1	235.3	231.8	228.5	225.6
12,5°	270.9	263.5	256.3	249.3	242.5	236.1	230.1	224.6	219.5	214.6	210.0	205.8	201.9	198.1	194.8
15,0°	256.2	247.1	238.2	229.8	221.8	214.1	207.0	200.5	194.6	189.1	184.1	179.6	175.5	171.6	168.2
17,5°	242.8	232.1	222.1	212.4	203.1	194.9	186.7	179.3	172.6	166.6	161.1	156.3	152.1	148.3	145.1
20,0°	232.3	220.5	209.5	198.9	188.8	179.4	170.6	162.6	155.2	148.6	142.8	137.9	133.7	129.9	126.9
22,5°	223.1	210.7	198.7	187.2	176.5	166.6	157.2	148.6	140.6	133.7	127.8	122.8	118.7	115.2	112.5
25,0°	214.6	201.5	189.2	177.7	166.4	156.2	146.2	137.0	128.7	121.7	115.8	111.2	107.4	104.2	101.7
27,5°	205.6	192.2	179.7	168.0	156.2	145.4	135.3	126.5	118.5	111.7	106.2	101.9	98.6	95.9	93.6
30,0°	197.6	183.5	170.6	158.0	145.8	135.1	125.3	117.2	110.1	104.0	99.1	95.2	92.3	90.0	88.0
32,5°	190.9	175.8	161.1	147.6	135.5	125.3	116.7	109.3	102.9	97.5	93.3	90.1	87.6	85.4	83.6
35,0°	184.2	167.1	151.0	137.2	125.8	116.5	108.6	102.0	96.5	92.1	88.8	86.1	83.9	81.9	80.1
37,5°	178.0	158.9	141.7	128.8	117.5	108.5	101.3	96.0	92.0	88.6	86.0	83.7	81.7	79.6	77.7
40,0°	168.5	147.7	133.5	120.8	109.3	101.0	95.4	91.6	88.5	85.9	83.8	81.8	79.8	77.8	75.7
42,5°	151.9	136.6	124.1	109.6	99.9	94.9	91.3	88.4	86.1	84.2	82.4	80.6	78.5	76.2	73.9
45,0°	137.3	124.8	108.5	97.2	92.9	90.1	87.6	85.7	84.1	82.6	81.0	79.0	76.8	74.4	72.0
47,5°	120.4	105.9	94.1	90.1	87.6	85.5	83.9	82.8	81.9	80.6	79.1	77.1	75.1	72.4	69.7
50,0°	102.4	88.1	84.3	82.5	81.2	80.4	80.1	79.8	79.0	78.0	76.5	74.7	72.4	69.7	67.0
52,5°	86.3	80.5	77.4	76.1	75.5	75.5	75.7	75.9	75.7	74.9	73.2	71.5	69.3	66.8	64.0
55,0°	79.7	74.5	71.4	69.9	69.4	69.9	70.5	70.9	71.1	70.7	69.6	68.0	65.7	63.2	60.5
57,5°	71.0	65.7	62.1	62.4	63.4	64.7	65.3	65.7	65.8	65.4	64.9	63.9	62.0	59.6	56.8
60,0°	65.2	58.1	56.9	57.6	58.6	59.4	60.0	60.2	60.2	60.2	60.0	59.2	57.8	55.5	52.8
62,5°	55.7	53.1	53.3	54.1	54.7	55.3	55.3	55.0	54.6	54.4	54.1	53.4	52.4	50.5	48.3
65,0°	49.2	48.7	49.3	50.1	50.9	51.3	51.1	50.6	50.1	49.3	48.4	47.3	46.5	44.9	43.2
67,5°	44.8	45.1	45.3	45.8	46.1	46.2	46.0	45.7	45.0	44.1	43.0	42.0	40.5	38.9	37.7
70,0°	40.2	41.1	41.3	41.4	41.4	41.2	40.9	40.7	39.9	39.0	38.1	37.1	35.4	33.9	32.6
72,5°	34.5	36.1	36.6	36.6	36.5	36.4	36.0	35.3	34.8	34.4	33.6	32.2	30.8	29.4	28.3
75,0°	28.8	30.2	30.9	31.3	31.4	31.4	31.3	30.8	30.3	30.0	29.2	28.0	26.7	25.5	24.4
77,5°	22.6	23.8	24.8	25.3	25.5	25.8	26.0	25.8	25.6	25.8	25.0	24.0	22.8	21.7	20.6
80,0°	15.8	16.8	17.7	18.5	19.0	19.2	19.2	19.2	19.4	20.1	19.8	19.2	18.4	17.6	16.9
82,5°	8.9	9.3	9.8	10.6	11.3	11.8	12.0	12.1	12.1	12.5	13.0	13.0	12.9	12.7	12.5
85,0°	4.4	4.3	4.2	4.0	3.9	3.8	3.8	3.9	4.0	4.2	4.6	5.0	5.5	5.9	6.2
87,5°	2.6	2.4	2.3	2.3	2.2	2.1	2.0	2.0	1.9	1.9	1.8	1.7	1.5	1.4	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3B41E08ME EAN: 4058352584033	LP number 59338_130
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	0.5	0.5
2,5°	326.1	325.4	324.7	324.0	323.3	322.7	322.1	321.6	320.9	320.4	320.0	319.8	319.7	4.2	4.8
5,0°	290.4	289.0	287.5	286.3	285.1	284.0	283.0	282.1	281.2	280.5	279.9	279.6	279.4	8.3	13.1
7,5°	255.9	253.8	251.8	250.0	248.3	246.8	245.5	244.3	243.3	242.4	241.8	241.4	241.3	12.2	25.3
10,0°	222.7	220.1	217.7	215.5	213.5	211.8	210.3	209.0	207.9	207.0	206.4	206.1	205.9	15.9	41.3
12,5°	191.7	189.1	186.5	184.1	182.1	180.3	178.7	177.3	176.3	175.4	174.8	174.5	174.5	19.4	60.6
15,0°	165.0	162.3	159.8	157.6	155.6	153.8	152.3	151.1	150.1	149.3	148.8	148.5	148.4	22.6	83.3
17,5°	142.0	139.5	137.2	135.2	133.4	131.9	130.5	129.4	128.5	127.8	127.3	127.0	127.0	25.7	108.9
20,0°	124.1	121.9	119.9	118.1	116.6	115.3	114.1	113.1	112.4	111.8	111.3	111.0	110.9	28.5	137.4
22,5°	110.0	108.0	106.2	104.7	103.4	102.3	101.3	100.4	99.7	99.1	98.8	98.6	98.5	31.1	168.5
25,0°	99.6	97.9	96.3	94.9	93.7	92.7	91.8	91.1	90.5	89.9	89.6	89.4	89.3	33.4	201.9
27,5°	91.6	90.1	88.7	87.4	86.3	85.4	84.5	83.8	83.3	82.9	82.5	82.3	82.3	35.4	237.3
30,0°	86.2	84.6	83.2	81.9	80.9	80.0	79.3	78.6	78.0	77.6	77.3	77.1	77.1	37.0	274.3
32,5°	81.9	80.5	79.1	77.9	76.7	75.6	74.8	74.1	73.4	72.9	72.7	72.5	72.5	38.3	312.7
35,0°	78.4	76.8	75.4	74.1	72.9	71.7	70.7	69.7	69.0	68.4	68.1	67.9	67.8	39.3	352.0
37,5°	75.9	74.1	72.5	70.9	69.5	68.2	67.0	66.0	65.2	64.5	64.1	63.9	63.8	39.9	391.9
40,0°	73.5	71.5	69.7	67.9	66.2	64.7	63.3	62.2	61.4	60.7	60.2	60.0	59.8	40.2	432.1
42,5°	71.4	69.2	67.1	65.0	63.0	61.4	60.0	58.7	57.8	57.1	56.6	56.3	56.2	40.3	472.4
45,0°	69.3	66.9	64.3	62.0	59.8	58.0	56.4	55.0	54.1	53.3	52.8	52.4	52.3	40.4	512.8
47,5°	66.8	64.1	61.4	58.8	56.5	54.5	52.9	51.6	50.5	49.5	49.0	48.6	48.5	40.4	553.2
50,0°	64.0	61.2	58.2	55.7	53.2	51.1	49.3	47.8	46.6	45.7	45.0	44.7	44.6	40.4	593.6
52,5°	61.0	58.0	55.2	52.5	50.1	48.0	46.1	44.4	43.1	42.1	41.4	41.1	41.0	40.5	634.2
55,0°	57.7	54.8	51.9	49.3	46.9	44.9	42.9	41.3	40.0	38.9	38.2	37.8	37.7	40.5	674.7
57,5°	53.9	51.2	48.5	46.0	43.8	41.6	39.8	38.2	36.9	35.8	35.0	34.6	34.4	41.1	715.7
60,0°	49.9	47.3	44.9	42.7	40.5	38.5	36.7	35.1	33.8	32.7	32.0	31.6	31.4	42.3	758.0
62,5°	45.9	43.4	41.1	39.0	37.1	35.3	33.5	32.0	30.7	29.8	29.1	28.7	28.6	42.5	800.6
65,0°	41.1	39.3	37.6	35.6	33.7	32.2	30.6	29.2	28.1	27.0	26.4	26.0	26.0	41.7	842.2
67,5°	36.4	35.0	33.5	32.1	30.6	29.2	27.8	26.5	25.5	24.5	23.8	23.4	23.2	39.6	881.8
70,0°	31.4	30.7	29.7	28.6	27.5	26.2	25.0	23.9	22.8	21.9	21.2	20.8	20.7	37.3	919.1
72,5°	27.4	26.5	25.6	24.9	24.0	23.0	22.0	20.8	19.8	19.0	18.4	17.9	17.9	32.6	951.7
75,0°	23.4	22.5	21.6	20.8	20.2	19.4	18.5	17.6	16.7	15.9	15.3	14.9	14.7	24.1	975.8
77,5°	19.7	18.9	18.0	17.2	16.4	15.7	15.2	14.3	13.5	12.8	12.1	11.8	11.7	13.5	989.3
80,0°	16.1	15.3	14.5	13.7	13.0	12.3	11.5	10.8	10.0	9.4	8.8	8.4	8.3	6.3	995.6
82,5°	12.1	11.6	11.2	10.6	9.8	9.1	8.2	7.4	6.7	6.3	5.8	5.6	5.5	2.5	998.2
85,0°	6.4	6.4	6.4	6.3	6.0	5.4	4.8	4.2	3.7	3.3	2.9	2.0	2.5	1.3	999.4
87,5°	1.3	1.2	1.2	1.2	1.3	1.4	1.3	1.3	1.1	0.8	0.5	0.3	0.3	0.6	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3B41E08ME EAN: 4058352584033	LP number 59338_130
--	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	18720	124.7	132.2	128.4
95	241	252	17762	117.0	124.0	120.5
90	229	250	16877	110.1	116.7	113.4
85	216	248	15919	102.8	109.0	105.9
80	203	246	14961	95.8	101.5	98.6
75	190	243	14003	88.9	94.1	91.5
70	178	241	13119	82.6	87.5	85.0
65	165	238	12161	76.0	80.5	78.2
60	152	235	11203	69.5	73.6	71.6
55	140	232	10318	63.7	67.4	65.6
50	127	229	9360	57.4	60.7	59.0
45	114	225	8402	51.1	54.1	52.6
40	102	221	7517	45.5	48.2	46.8
35	89	216	6559	39.6	41.8	40.7
30	76	210	5601	33.7	35.6	34.7
25	63	203	4643	28.0	29.5	28.8
20	51	195	3759	22.8	24.0	23.4
15	38	184	2801	17.2	18.1	17.6
13	33	179	2432	15.2	16.0	15.6