
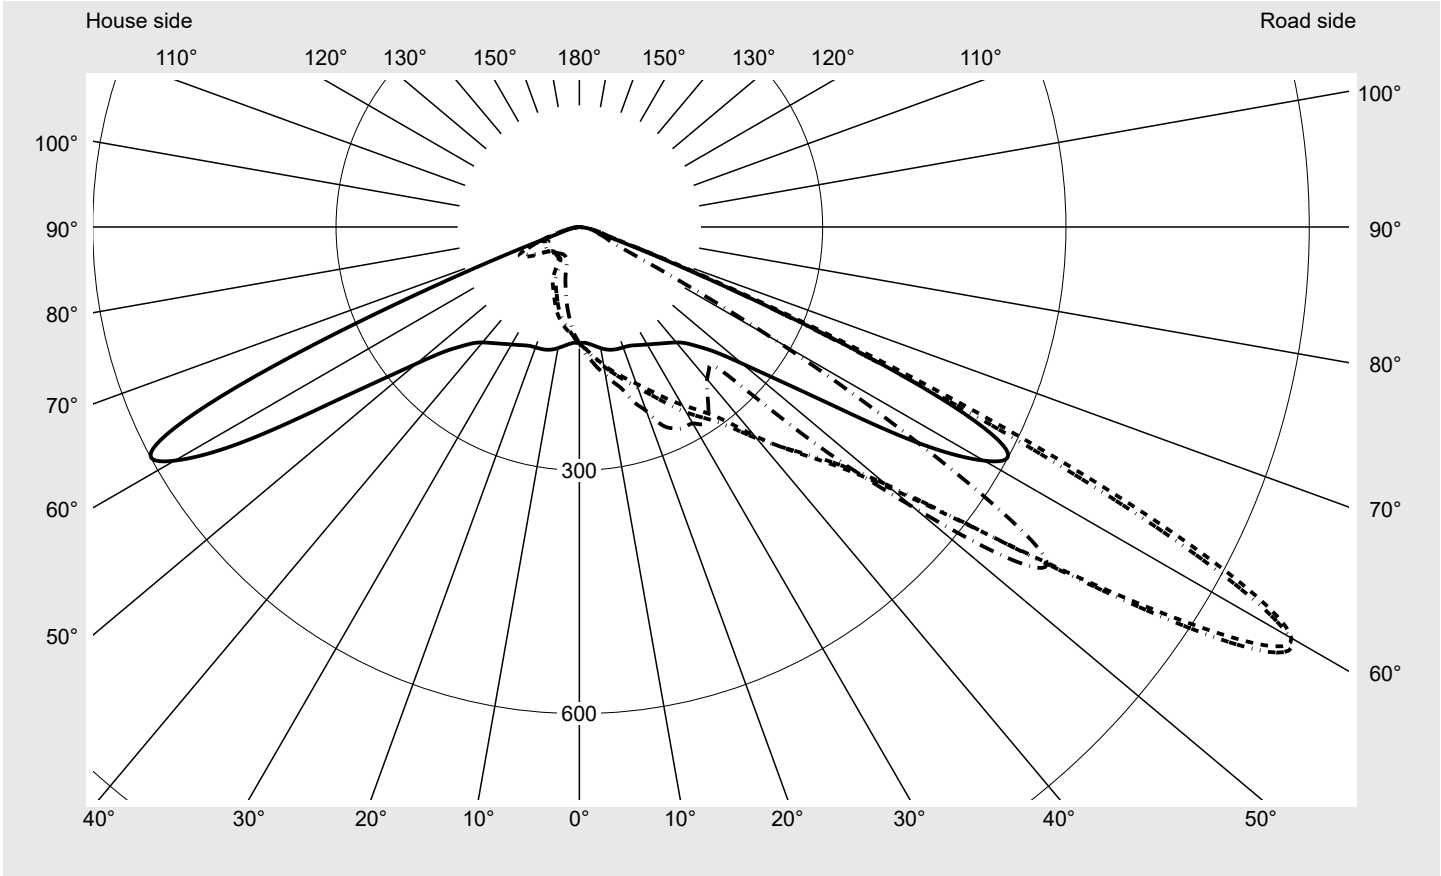


Photometric test report

Family Floodlight FL11	Order number: 5XA779214A01BA EAN: 4058352537558	LP number 59255_32
	Version standard bracket Optic asymmetric distribution PL43 Cover toughened safety glass Lamps LED 5700 K CRI ≥ 90 Controlgear ECG Rated values Ta = 10 °C Net luminous flux = 75700 lm Power consumption = 707.9 W Luminous efficacy = 106.9 lm/W	serial documentation 14.03.2023



Luminous intensity in cd/klm
C180-0
C215-35
C220-40
C270-90
Imax: 1014 cd/klm



Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G6
Imax 70°	89.4
Imax 80°	14.1
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779214A01BA EAN: 4058352537558	LP number 59255_32
---	--	-------------------------------------

Envelope curve in cd/klm **KMK 60°** **KMK 57.5°** **KMK 55°** **KMK 52.5°** **siteco**

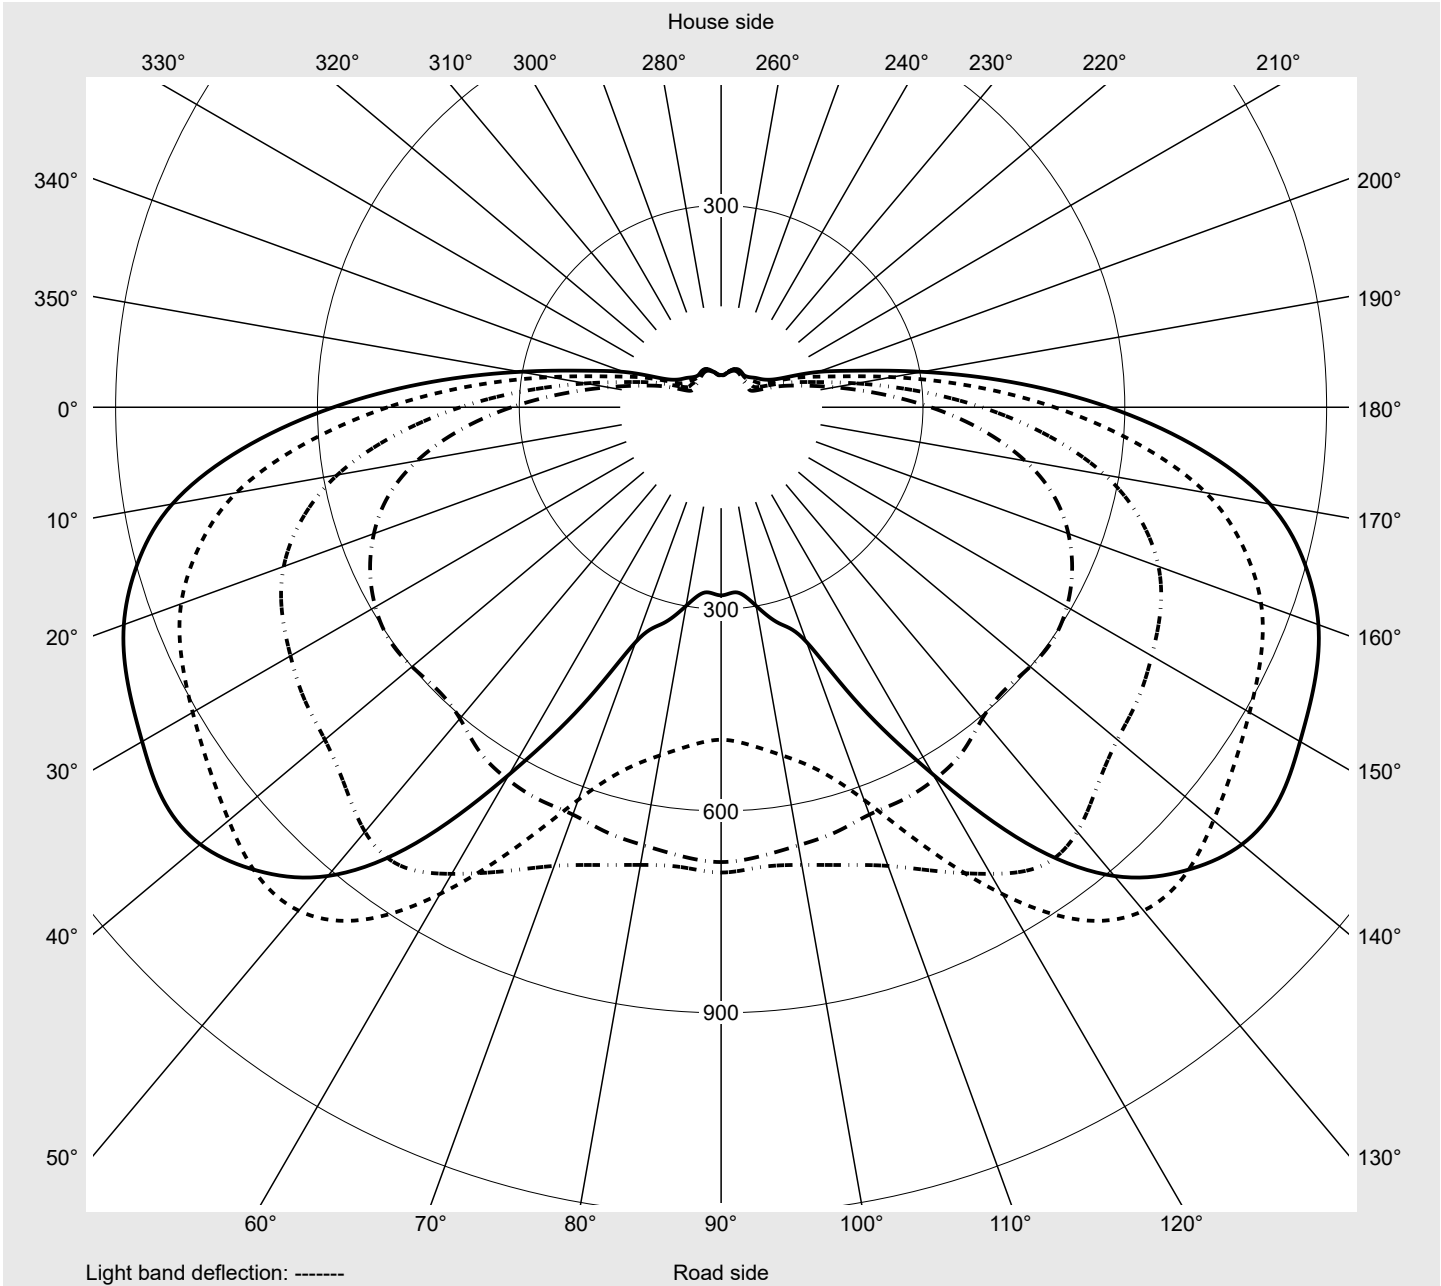

Photometric test report

Family Floodlight FL11	Order number: 5XA779214A01BA EAN: 4058352537558	LP number 59255_32
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1
2,5°	142.9	143.9	144.8	145.7	146.5	147.4	148.2	149.1	149.9	150.6	151.2	151.8	152.3
5,0°	144.9	146.9	148.7	150.4	152.0	153.6	155.1	156.5	157.9	159.1	160.2	161.1	162.0
7,5°	148.0	151.0	153.7	156.1	158.4	160.5	162.5	164.4	166.1	167.6	168.9	170.1	171.2
10,0°	151.7	155.4	158.9	162.0	165.0	167.6	170.2	172.4	174.4	176.2	177.7	179.0	180.2
12,5°	154.7	159.5	163.8	167.7	171.3	174.7	177.8	180.7	183.1	185.3	187.1	188.7	190.0
15,0°	156.7	162.6	167.7	172.5	177.0	181.1	185.0	188.6	191.7	194.7	197.0	199.0	200.6
17,5°	157.5	164.7	170.9	176.9	182.3	187.5	192.3	196.9	201.2	205.1	208.1	210.4	212.3
20,0°	158.0	166.4	174.1	181.2	187.6	193.7	199.7	205.6	210.9	215.7	219.5	222.6	224.9
22,5°	158.8	169.1	178.2	186.4	193.8	201.3	208.7	215.7	222.1	227.9	232.8	236.7	239.4
25,0°	161.0	172.9	183.6	192.8	201.4	210.3	219.0	227.2	235.0	242.1	248.4	252.9	255.5
27,5°	164.0	177.9	190.2	200.8	210.8	220.9	230.8	240.1	249.6	258.9	266.7	271.6	274.1
30,0°	167.3	183.6	197.7	210.1	221.6	233.0	243.2	253.1	264.0	275.8	285.7	290.4	291.6
32,5°	171.0	190.2	206.5	220.9	234.2	246.5	256.7	266.3	277.7	292.6	306.8	311.8	311.1
35,0°	175.3	198.1	217.4	234.2	248.9	261.9	272.5	282.1	292.5	310.1	329.7	338.3	329.2
37,5°	180.1	207.4	231.0	251.1	267.7	282.3	294.5	304.6	313.4	328.5	347.1	352.7	335.7
40,0°	185.8	218.1	247.2	272.7	294.1	312.4	326.8	335.8	340.4	346.8	349.1	341.7	324.5
42,5°	194.4	231.1	264.5	293.9	318.8	340.3	358.0	367.5	367.4	362.7	347.8	333.1	315.3
45,0°	208.8	252.0	289.7	323.2	350.1	372.9	391.8	400.4	396.3	381.6	359.9	338.1	317.3
47,5°	228.7	279.7	323.7	362.0	390.8	415.4	433.5	440.4	433.3	412.3	386.3	360.1	339.7
50,0°	262.1	323.3	377.5	421.9	451.7	478.4	495.9	502.0	493.9	473.6	454.2	442.5	447.2
52,5°	311.6	389.8	459.0	512.6	549.2	575.7	593.4	602.3	599.8	595.1	604.0	625.4	637.4
55,0°	387.6	488.7	579.3	645.4	691.8	720.2	739.1	756.3	768.8	792.2	823.6	831.7	800.8
57,5°	495.6	621.2	731.6	803.6	854.2	884.7	907.0	930.0	955.3	978.4	976.7	930.0	835.3
60,0°	576.2	715.2	828.3	898.1	944.8	972.9	993.7	1013.7	1010.7	974.2	909.5	790.8	630.4
62,5°	592.9	727.4	825.0	876.4	896.4	889.7	870.3	850.6	803.3	719.6	609.3	480.0	362.1
65,0°	464.2	556.2	615.7	640.1	640.1	611.8	577.6	540.6	475.6	401.1	332.2	269.0	199.4
67,5°	219.4	259.3	280.7	290.7	290.6	278.5	262.5	245.2	217.7	187.4	151.8	117.9	93.3
70,0°	69.1	77.8	79.1	84.1	88.4	89.4	88.9	87.7	83.0	72.0	67.0	63.6	59.1
72,5°	27.4	25.1	24.9	25.9	29.3	31.6	33.2	36.7	39.1	42.1	45.9	45.5	43.0
75,0°	19.3	22.1	21.1	21.6	22.4	23.6	24.8	28.2	29.4	29.9	30.9	31.4	32.0
77,5°	17.0	19.2	16.3	16.4	17.7	17.6	18.3	19.7	20.2	19.8	20.5	21.6	22.2
80,0°	13.2	12.3	11.3	11.3	11.9	12.5	12.2	12.9	13.5	13.7	13.5	13.6	14.1
82,5°	7.4	8.1	6.7	6.7	7.0	7.5	7.8	7.7	8.1	8.6	8.1	7.7	7.8
85,0°	3.4	3.7	3.4	3.4	3.5	3.7	3.8	3.7	3.5	3.3	3.2	3.0	2.8
87,5°	1.5	1.5	1.5	1.5	1.4	1.4	1.3	1.2	1.1	1.1	1.0	1.0	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779214A01BA EAN: 4058352537558	LP number 59255_32
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1
2,5°	152.8	153.2	153.5	153.9	154.0	155.9	142.1	141.2	140.4	139.5	138.6	138.0	137.3
5,0°	162.9	163.6	164.2	164.6	165.0	164.9	143.1	141.2	139.2	137.2	135.1	133.3	131.4
7,5°	172.2	173.1	173.8	174.4	174.8	175.5	145.2	142.2	139.1	135.9	132.6	129.5	126.4
10,0°	181.3	182.3	183.2	184.0	184.6	184.6	147.7	143.6	139.3	134.8	130.1	125.5	121.0
12,5°	191.2	192.4	193.5	194.6	195.5	196.3	149.6	144.3	138.6	132.8	126.6	120.6	114.6
15,0°	202.0	203.2	204.7	206.4	208.0	208.1	150.3	143.7	136.6	129.3	121.9	114.6	107.5
17,5°	213.9	215.4	217.2	219.9	223.2	227.2	149.8	141.6	133.0	124.4	115.7	107.2	99.0
20,0°	226.7	228.1	229.9	233.3	239.2	241.5	148.7	138.9	128.9	119.1	109.2	99.6	91.0
22,5°	240.9	241.5	242.5	246.0	255.1	263.4	147.8	136.4	124.7	113.4	102.6	92.6	83.7
25,0°	255.8	254.6	254.0	256.8	267.6	273.9	148.0	134.6	120.9	108.2	96.6	86.5	77.6
27,5°	273.1	269.4	266.6	268.3	277.4	279.1	148.7	133.0	117.5	103.7	91.7	81.3	69.7
30,0°	289.4	282.9	277.8	279.5	285.6	279.7	149.5	131.8	114.9	100.4	88.0	76.2	56.2
32,5°	305.9	292.4	283.0	283.6	289.7	287.9	150.6	130.6	112.8	97.9	85.2	66.0	47.8
35,0°	316.5	296.5	283.1	282.2	281.5	277.6	151.5	129.5	110.7	95.5	80.4	53.8	45.7
37,5°	316.2	292.2	277.5	272.6	263.8	259.3	152.7	128.4	108.8	93.3	68.2	47.4	44.9
40,0°	303.9	282.2	265.9	254.6	246.7	245.1	154.4	127.8	107.0	90.5	55.0	46.1	44.5
42,5°	295.7	274.4	258.9	245.8	239.0	236.8	158.1	128.3	105.5	85.4	50.5	45.7	44.2
45,0°	297.3	277.2	268.1	262.3	262.2	258.5	166.4	131.4	105.4	82.0	49.7	45.5	44.0
47,5°	333.3	335.8	347.5	361.9	374.5	398.4	179.8	138.4	107.5	81.1	49.8	45.3	44.1
50,0°	468.9	489.5	511.2	527.6	540.9	537.6	201.8	151.4	113.3	83.2	52.3	46.0	45.8
52,5°	642.9	644.3	654.3	661.3	669.9	676.0	234.9	171.2	124.2	90.9	60.5	50.1	49.4
55,0°	760.8	725.5	704.3	690.7	686.0	691.6	288.2	204.3	144.7	107.5	76.7	59.8	56.0
57,5°	722.1	621.0	558.4	525.6	504.2	494.2	369.5	257.9	177.1	131.0	94.6	71.6	64.6
60,0°	489.5	371.4	332.4	299.7	276.3	279.6	432.0	303.4	209.9	153.4	104.4	81.9	72.9
62,5°	282.9	220.3	166.1	126.6	104.6	96.1	449.0	316.9	223.7	160.1	112.9	89.4	79.4
65,0°	148.0	114.0	58.9	43.7	40.2	43.4	342.5	250.4	185.5	134.8	106.2	89.3	81.1
67,5°	77.2	65.3	45.2	41.1	38.0	35.0	129.5	94.9	102.2	86.6	76.6	72.0	70.8
70,0°	51.1	44.0	36.2	32.4	29.2	27.4	36.8	28.8	35.3	44.3	45.7	48.9	53.0
72,5°	39.9	35.0	29.9	26.7	24.1	21.3	23.1	22.1	22.7	27.5	28.7	31.7	36.5
75,0°	31.1	28.4	24.3	21.0	20.0	18.3	19.1	17.4	18.1	20.3	20.7	22.9	26.7
77,5°	22.1	20.1	17.8	16.1	15.3	13.4	17.5	14.7	13.9	14.9	14.9	16.3	18.5
80,0°	13.8	12.8	11.5	10.5	9.6	9.3	12.4	11.3	9.6	10.6	10.2	10.7	11.6
82,5°	7.4	6.9	6.4	5.8	5.4	5.2	6.8	10.0	6.2	6.9	6.3	6.1	6.5
85,0°	2.5	2.4	2.2	2.1	2.0	2.2	3.2	5.6	3.4	3.2	2.9	2.8	2.8
87,5°	0.9	0.9	0.8	0.8	0.8	0.8	1.5	1.7	1.5	1.4	1.4	1.3	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779214A01BA EAN: 4058352537558	LP number 59255_32
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	143.1	0.2	0.2
2,5°	136.6	135.9	135.3	134.8	134.4	134.0	133.6	133.4	133.3	132.9	133.0	1.7	1.9
5,0°	129.6	128.0	126.3	125.0	123.7	122.5	121.5	120.8	120.2	119.7	119.6	3.4	5.4
7,5°	123.3	120.3	117.4	114.9	112.5	110.5	108.8	107.4	106.5	105.8	105.5	5.2	10.5
10,0°	116.5	112.2	108.2	104.6	101.4	98.6	96.3	94.5	93.1	92.2	91.8	6.9	17.4
12,5°	109.0	103.7	98.5	93.9	89.7	86.1	83.1	80.9	79.2	78.2	77.8	8.6	26.0
15,0°	100.6	94.1	88.2	83.0	78.6	74.9	71.8	69.4	67.8	66.8	66.4	10.3	36.3
17,5°	91.4	84.4	78.4	73.2	68.5	64.2	60.4	57.5	55.4	54.2	53.8	12.0	48.3
20,0°	83.4	76.3	69.2	61.4	54.6	49.9	47.0	45.4	44.3	43.8	43.6	13.7	62.1
22,5°	75.9	66.6	55.9	48.6	45.4	43.9	42.9	42.2	41.6	41.2	41.1	15.6	77.7
25,0°	67.6	55.0	47.3	44.6	43.4	42.5	41.6	41.0	40.5	40.1	40.1	17.6	95.3
27,5°	54.3	46.4	44.3	43.3	42.5	41.8	41.1	40.4	39.9	39.6	39.5	19.9	115.2
30,0°	46.4	44.5	43.5	42.8	42.2	41.5	40.7	40.1	39.6	39.3	39.2	22.2	137.4
32,5°	44.9	43.8	43.2	42.6	42.0	41.5	40.9	40.3	39.8	39.5	39.4	24.6	162.0
35,0°	44.2	43.5	42.9	42.6	42.4	42.1	41.7	41.2	40.6	40.2	40.0	27.1	189.1
37,5°	43.9	43.0	42.7	42.9	43.1	43.2	42.9	42.2	41.6	41.0	40.8	29.4	218.5
40,0°	43.4	42.8	42.9	43.6	44.2	44.5	44.4	43.9	43.1	42.4	42.1	31.6	250.0
42,5°	43.2	42.9	43.5	44.4	45.6	46.5	46.7	46.1	45.1	43.9	43.5	34.0	284.1
45,0°	43.3	43.7	44.5	46.0	47.7	49.2	49.6	48.7	47.2	45.6	45.0	37.6	321.7
47,5°	44.2	44.8	46.1	48.1	50.5	52.3	52.6	51.2	49.1	47.0	46.1	44.4	366.1
50,0°	46.5	47.2	48.6	50.8	53.4	55.3	55.6	53.6	50.8	48.1	47.2	56.3	422.5
52,5°	50.3	50.3	51.3	53.4	55.9	57.8	57.8	55.3	51.8	48.7	47.8	72.5	495.0
55,0°	55.0	53.7	53.6	55.3	57.9	59.7	59.4	56.4	52.4	48.8	47.9	90.1	585.1
57,5°	61.0	58.0	56.6	57.3	59.6	61.2	60.5	57.1	52.7	48.9	48.1	101.8	686.9
60,0°	67.7	62.8	59.5	58.6	60.4	61.7	60.4	56.5	51.8	47.9	47.7	99.8	786.7
62,5°	72.9	67.0	61.6	59.1	59.7	60.3	58.2	54.1	50.0	46.9	47.9	84.4	871.1
65,0°	73.6	67.7	61.5	57.3	56.5	56.3	53.4	49.3	45.7	42.4	42.1	58.8	930.0
67,5°	67.4	62.8	56.7	52.6	50.6	48.8	45.7	41.6	37.8	38.1	46.3	30.5	960.5
70,0°	54.3	52.8	48.6	44.1	42.4	41.2	38.7	34.9	31.4	31.5	46.2	14.0	974.4
72,5°	40.1	39.7	38.0	36.1	34.7	33.6	31.1	27.7	24.6	23.9	28.3	8.4	982.8
75,0°	29.2	30.2	29.5	28.2	27.4	25.9	23.6	20.3	18.0	17.6	18.4	6.4	989.2
77,5°	20.4	21.5	20.3	19.1	18.9	18.8	17.2	14.5	12.8	11.7	11.4	4.7	994.0
80,0°	12.4	13.0	12.8	12.0	11.3	10.7	9.7	8.7	7.8	7.1	6.9	3.1	997.1
82,5°	6.7	6.9	6.9	6.2	5.8	5.6	5.1	4.6	4.1	3.8	3.7	1.8	998.9
85,0°	3.0	2.8	2.6	2.4	2.1	1.9	1.8	1.8	1.7	1.7	1.7	0.8	999.7
87,5°	1.3	1.2	1.2	1.2	1.2	1.1	1.1	1.1	1.0	1.0	1.0	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family
Floodlight FL11

Order number: 5XA779214A01BA
EAN: 4058352537558

LP number
59255_32

Dimming levels table

environmental temperature: 10°C

siteco

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	254	75700	707.9
95	237	71853	659.1
90	222	68223	616.0
85	206	64299	570.9
80	191	60464	528.5
75	177	56732	489.2
70	163	52909	450.2
65	150	49254	414.3
60	136	45367	375.2
55	123	41486	339.7
50	111	37816	306.8
45	99	34116	274.0
40	87	30358	240.8
35	75	26434	208.3
30	64	22839	179.0
25	52	18773	147.1
20	41	14977	118.0
15	30	11189	89.3
10	20	7587	63.1
5	9	3604	34.6
2	3	1395	18.1

Dimming levels table

environmental temperature: 25°C

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	254	73090	702.9
95	236	69326	651.5
90	220	65723	605.8
85	204	62014	560.8
80	189	58364	518.6
75	175	54814	479.4
70	161	51184	440.7
65	148	47624	405.1
60	134	43859	366.3
55	121	40106	330.9
50	109	36565	298.4
45	97	32930	265.9
40	85	29256	233.1
35	73	25436	200.9
30	62	21863	171.9
25	51	18204	142.9
20	40	14466	114.1
15	30	11071	88.2
10	19	7163	59.9
5	9	3573	34.3
2	3	1384	17.9

Photometric test report

Family Floodlight FL11	Order number: 5XA779214A01BA EAN: 4058352537558	LP number 59255_32
----------------------------------	--	------------------------------

Luminousfluxs table	sITeco
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
10.0	75700.0	707.9
25.0	73090.0	702.9