

# Photometric test report

**Family**  
**Silica® 21**

**Order number: 51MX33TCTDW**  
**EAN: 4058352795958**

**LP number**  
**59332\_49**



**Version** Suspended luminaire, with homogeneous illumination, prismatic cover, direct-/ indirect distribution, extremely wide distribution, UGR≤16 (L65≤3000cd/m²), tunable white

**Lamps** LED 6500 K | CRI ≥ 80

**Controlgear** ECG-DALI


**Setting** individual position

**Rated values** Net luminous flux = 14340 lm  
Power consumption = 134.7 W  
Luminous efficacy = 106.5 lm/W

**serial documentation**  
**03.05.2023**



**Luminous intensity in cd/klm** C180-0 C270-90 **Imax: 358 cd/klm**

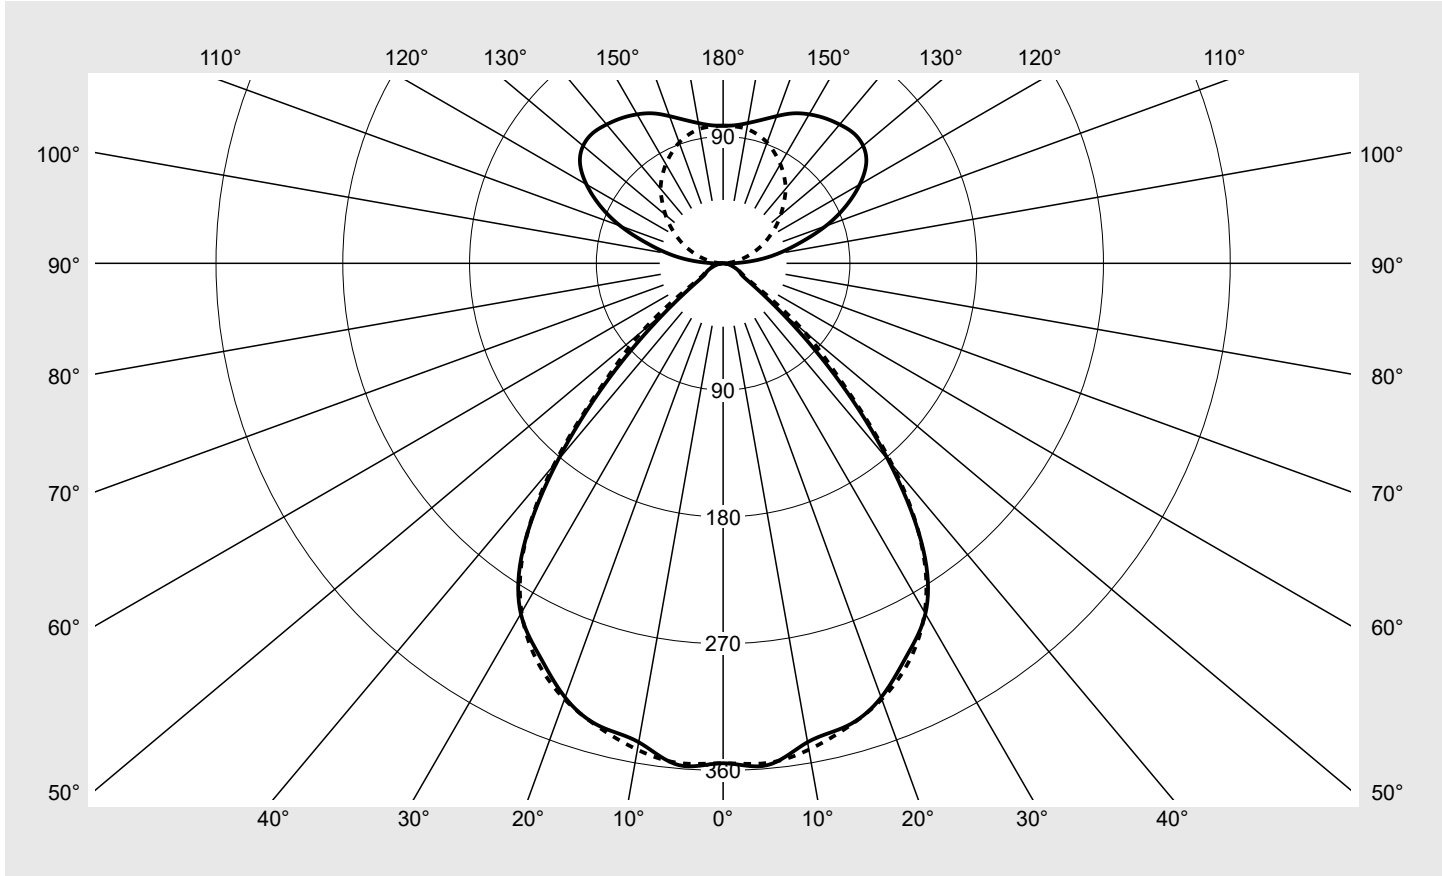

**Classifications**

DIN 5040	C 6 2
CIE	N1=78 N2=96 N3=99 N4=56 N5=100

**Luminaire light output ratios**

$\eta_{LB}$	100.0%
$\phi_u$	56.2%
$\phi_o$	43.8%

**Measurement conditions**  
DIN EN 13032 and DIN 5032

## Photometric test report

Family <b>Silica® 21</b>	Order number: <b>51MX33TCTDW</b> EAN: <b>4058352795958</b>	LP number <b>59332_49</b>
Table of values for luminous intensities		Maximum luminous intensity
		<b>siteco</b>

C-planes $\gamma$	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Total	
								Phi-zone	Phi-zone
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	354.9	354.9	354.9	354.9	354.9	354.9	354.9	2.1	2.1
5°	357.6	358.3	358.1	358.3	357.8	357.0	356.1	17.1	19.2
10°	345.2	344.3	344.5	346.4	350.1	350.3	350.6	33.1	52.3
15°	340.0	338.8	336.2	336.1	338.1	341.2	341.0	48.0	100.3
20°	328.0	327.2	323.2	324.1	322.5	324.8	329.3	60.9	161.2
25°	307.9	308.7	306.4	306.5	306.8	306.6	312.0	71.2	232.5
30°	287.2	287.0	283.4	284.9	285.2	284.2	286.2	78.2	310.6
35°	247.5	247.0	244.6	246.0	246.7	245.6	246.4	77.4	388.0
40°	182.5	182.1	183.5	184.7	186.1	185.9	187.0	65.0	453.0
45°	111.7	111.4	112.8	114.1	115.4	116.9	119.1	44.3	497.3
50°	52.4	60.7	68.3	62.5	56.3	66.9	74.7	26.5	523.8
55°	21.3	28.6	27.1	30.9	23.3	32.2	30.0	12.6	536.4
60°	14.3	14.9	15.7	14.6	14.6	15.6	16.3	7.2	543.6
65°	11.8	11.7	12.2	11.9	12.4	12.3	12.4	6.0	549.6
70°	8.5	8.7	9.0	9.0	9.2	9.3	9.8	4.7	554.2
75°	5.9	6.2	6.8	6.5	6.6	7.0	7.1	3.5	557.7
80°	3.6	3.8	4.2	4.6	4.2	4.7	4.8	2.3	560.0
85°	1.8	1.8	1.8	2.1	2.2	2.6	2.7	1.2	561.2
90°	6.2	6.0	6.3	6.0	3.5	1.2	0.4	2.4	563.6
95°	22.4	22.9	24.7	23.8	15.7	8.2	4.2	9.9	573.5
100°	39.4	40.6	41.5	37.2	25.7	14.7	9.7	16.6	590.1
105°	56.7	58.1	58.0	51.0	35.4	22.2	16.2	23.0	613.1
110°	77.6	78.3	74.6	63.1	45.4	29.8	23.1	29.3	642.4
115°	96.2	95.7	89.3	74.3	55.1	37.6	30.6	34.4	676.8
120°	112.0	110.6	101.9	83.7	64.3	45.2	37.9	38.0	714.8
125°	124.0	121.0	110.5	92.7	72.3	52.4	45.6	39.9	754.8
130°	129.8	127.1	115.2	98.2	78.4	59.6	53.3	39.9	794.7
135°	130.8	128.1	117.0	101.7	82.9	66.3	61.0	38.2	832.9
140°	128.7	126.6	117.2	103.9	86.2	72.4	69.0	35.5	868.4
145°	125.8	124.5	116.6	104.5	89.3	78.0	75.4	32.1	900.6
150°	122.1	121.5	114.3	103.4	91.6	83.4	81.3	28.1	928.7
155°	117.5	116.9	110.1	102.0	93.3	88.1	86.5	23.6	952.4
160°	111.2	110.8	105.7	100.5	94.8	91.7	91.2	18.9	971.3
165°	105.4	104.8	102.1	98.7	96.3	94.6	94.6	14.1	985.4
170°	101.1	100.5	99.8	98.3	97.2	96.9	96.9	9.4	994.7
175°	98.4	98.3	97.7	97.5	97.5	97.5	97.5	4.7	999.4
180°	97.7	97.7	97.7	97.7	97.7	97.7	97.7	0.6	1000.0

## Photometric test report

Family <b>Silica® 21</b>	Order number: <b>51MX33TCTDW</b> EAN: <b>4058352795958</b>	LP number <b>59332_49</b>
-----------------------------	---	------------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	15.4	16.3	16.3	17.2	18.3	15.6	16.5	16.5	17.4	18.5
	3H	15.3	16.1	16.2	17.0	18.1	15.6	16.4	16.5	17.3	18.4
	4H	15.3	16.0	16.2	16.9	18.1	15.6	16.3	16.5	17.2	18.4
	6H	15.2	15.8	16.1	16.8	17.9	15.6	16.2	16.5	17.1	18.3
	8H	15.1	15.7	16.1	16.7	17.9	15.5	16.0	16.4	17.0	18.2
	12H	15.0	15.6	16.0	16.5	17.8	15.5	16.0	16.4	17.0	18.2
4H	2H	15.2	15.9	16.1	16.8	17.9	15.3	16.0	16.2	16.9	18.1
	3H	15.2	15.8	16.1	16.7	17.9	15.4	16.0	16.3	16.9	18.1
	4H	15.2	15.7	16.1	16.7	17.9	15.4	16.0	16.4	16.9	18.1
	6H	15.2	15.6	16.1	16.6	17.8	15.5	15.9	16.5	16.9	18.1
	8H	15.1	15.5	16.1	16.5	17.8	15.5	15.9	16.5	16.9	18.1
	12H	15.1	15.4	16.0	16.4	17.7	15.5	15.9	16.5	16.8	18.1
8H	4H	15.1	15.5	16.0	16.4	17.7	15.3	15.7	16.2	16.6	17.9
	6H	15.1	15.5	16.1	16.5	17.7	15.4	15.7	16.4	16.7	18.0
	8H	15.1	15.4	16.1	16.4	17.7	15.5	15.8	16.5	16.8	18.1
	12H	15.1	15.3	16.1	16.3	17.6	15.6	15.8	16.6	16.8	18.1
12H	4H	15.0	15.3	16.0	16.3	17.6	15.2	15.5	16.2	16.5	17.8
	6H	15.1	15.3	16.1	16.3	17.6	15.3	15.6	16.4	16.6	17.9
	8H	15.1	15.3	16.1	16.3	17.6	15.4	15.7	16.5	16.7	18.0

<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm:</b>	<b>L = 3000</b>
			<b>B = 50</b>

C-planes	$\gamma$	Luminance in cd/m <sup>2</sup>							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°	45°	15096.2	15063.4	15252.6	15432.3	15599.4	15798.5	16107.6	
50°	50°	7796.1	9031.8	10157.0	9295.6	8377.2	9949.3	11106.9	
55°	55°	3544.6	4774.7	4510.2	5152.5	3891.5	5373.6	4994.7	
60°	60°	2743.3	2847.0	3009.3	2789.4	2799.7	2977.6	3112.2	
65°	65°	2665.2	2644.4	2750.2	2683.1	2796.8	2792.5	2813.1	
70°	70°	2384.3	2429.0	2527.4	2527.1	2567.1	2596.4	2730.3	
75°	75°	2189.3	2272.4	2504.0	2391.3	2446.7	2571.6	2633.6	
80°	80°	1977.5	2094.8	2310.6	2514.9	2332.6	2602.4	2664.6	
85°	85°	1922.8	1949.2	2026.0	2345.1	2462.5	2817.9	2937.5	

**Photometric test report**

<b>Family</b> <b>Silica® 21</b>	<b>Order number: 51MX33TCTDW</b> <b>EAN: 4058352795958</b>	<b>LP number</b> <b>59332_49</b>
------------------------------------	---	-------------------------------------



**Luminance values in cd/m<sup>2</sup>**

$\gamma$ 65°	$\gamma$ 70°	$\gamma$ 75°	$\gamma$ 80°	$\gamma$ 85°
--------------	--------------	--------------	--------------	--------------

