
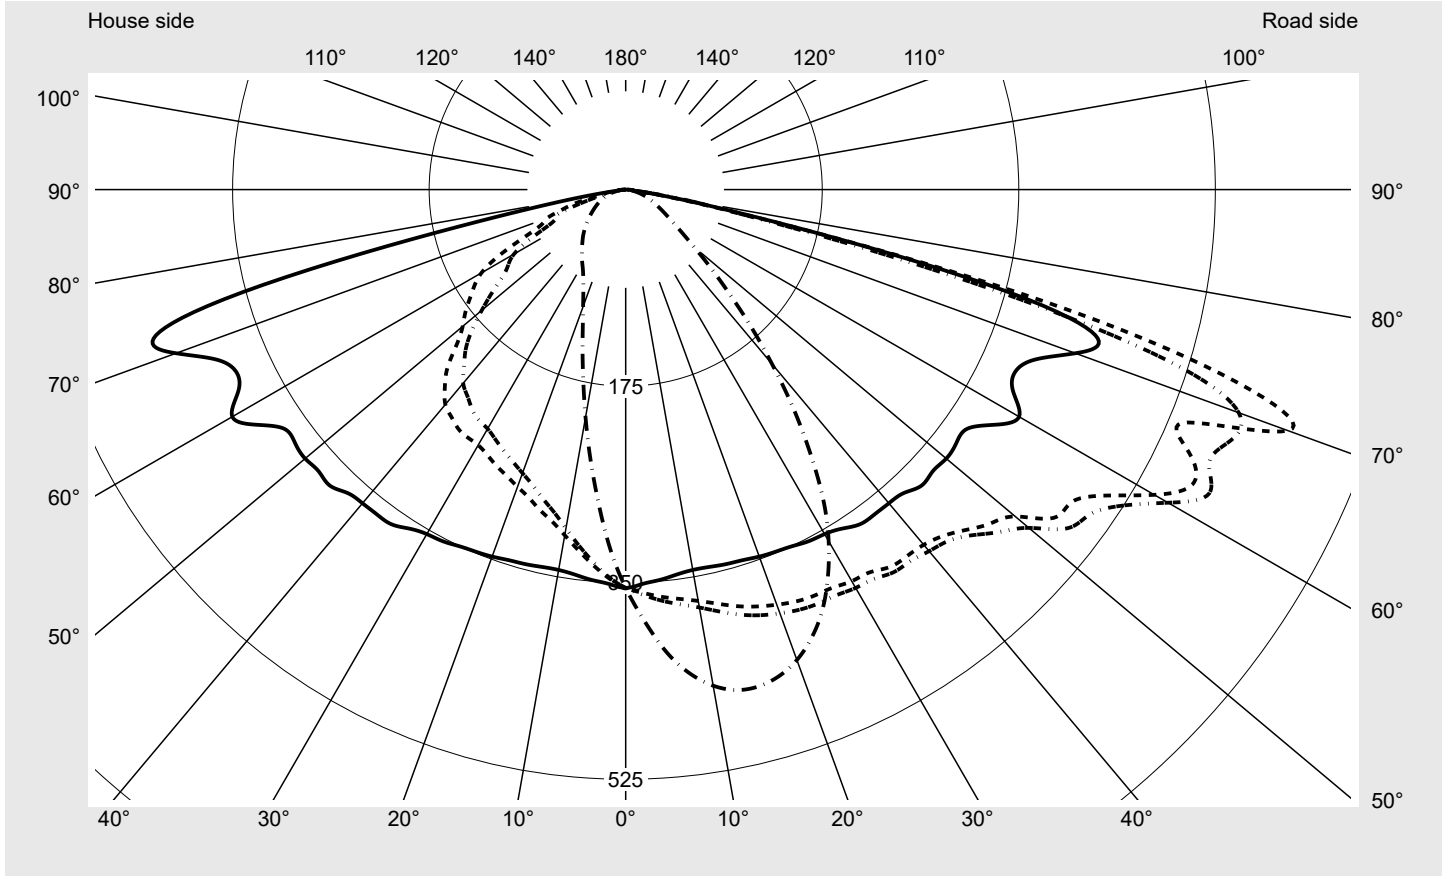


Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3B41E08LE EAN: 4058352584019	LP number 59338_260
	Version post-top or side-entry mounting Optic asymmetric, extremely wide distribution (ST0.5a) Cover transparent, PMMA Lamps LED 4000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 9500 lm Power consumption = 60.4 W Luminous efficacy = 157.3 lm/W	serial documentation 24.05.2023



Luminous intensity in cd/klm C180-0 C192.5-12.5 C195-15 C270-90 **Imax: 627 cd/klm**



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	627.5
Imax 80°	70.6
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3B41E08LE EAN: 4058352584019	LP number 59338_260
---	--	--------------------------------------

Envelope curve in cd/klm **KMK 70°** **KMK 67.5°** **KMK 65°** **KMK 62.5°** **siteco**

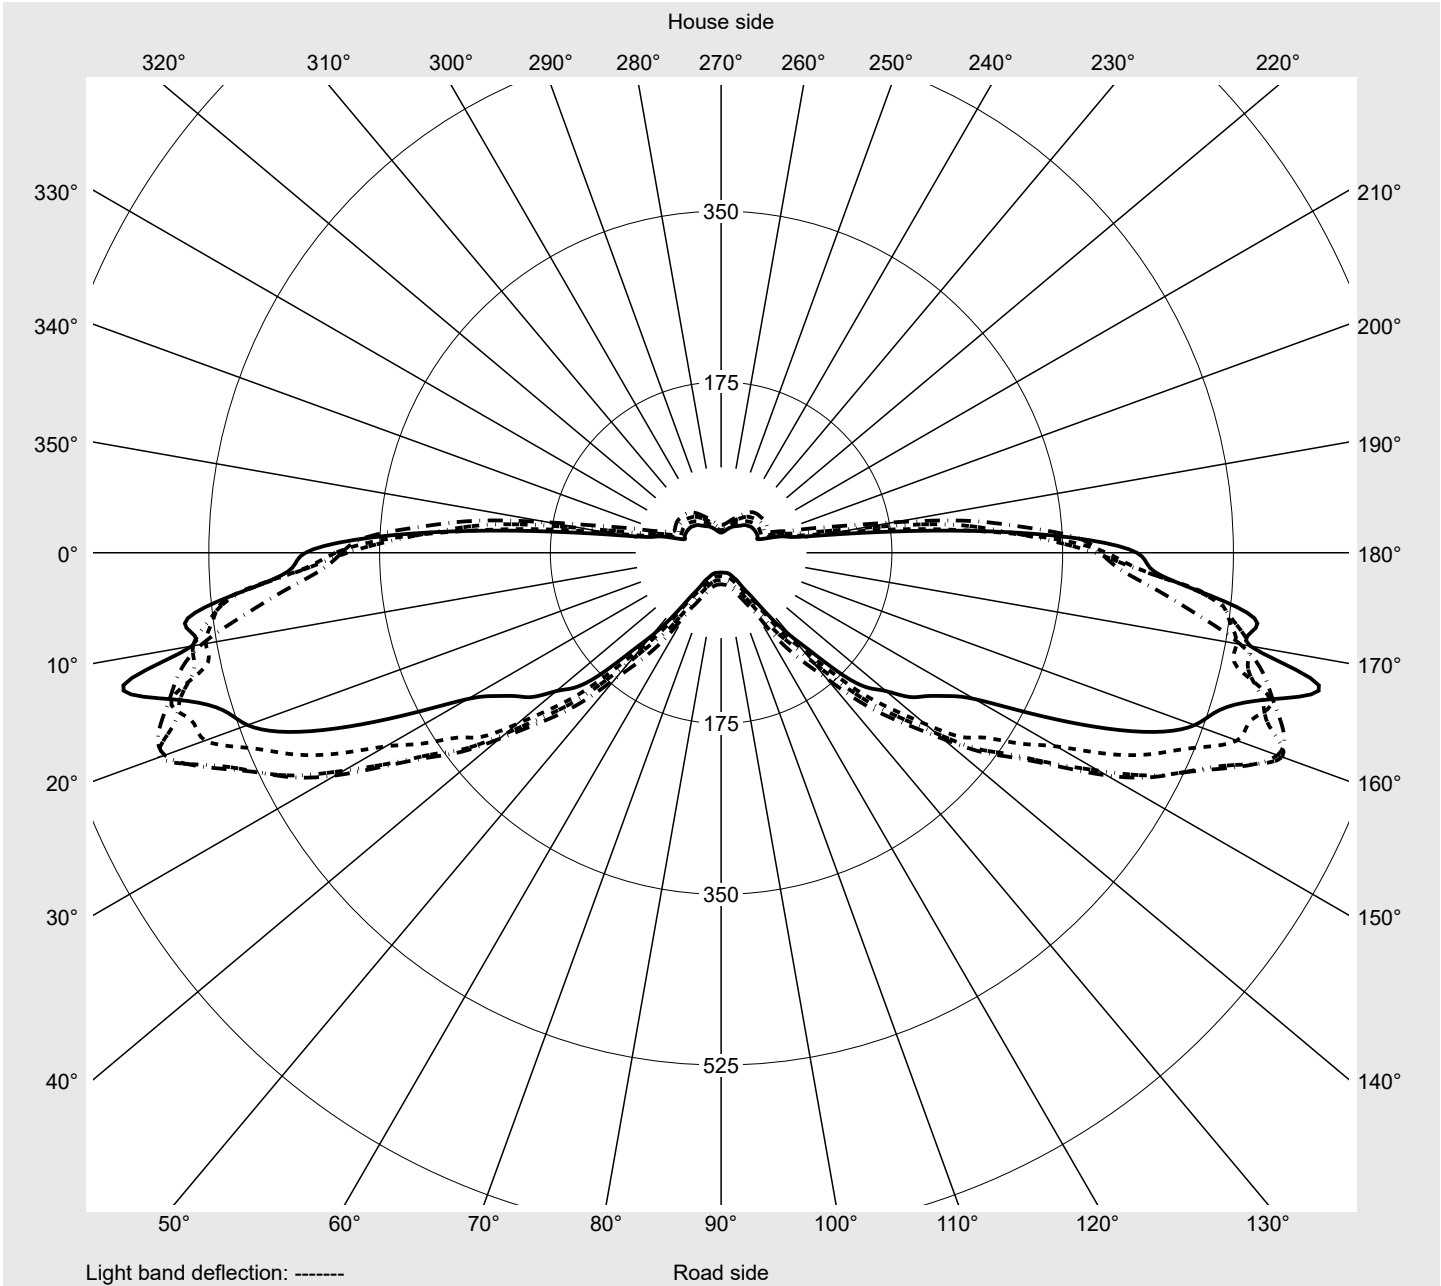

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3B41E08LE EAN: 4058352584019	LP number 59338_260
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6
2,5°	351.4	352.5	353.9	355.6	357.6	359.5	361.3	363.0	364.7	366.2	367.7	369.0	370.2	371.3	372.1
5,0°	348.9	351.4	354.1	356.9	360.4	363.9	367.4	370.5	373.3	376.1	378.9	381.4	383.7	386.0	388.2
7,5°	345.8	349.9	353.9	358.1	362.8	367.6	372.5	376.7	380.9	384.7	388.3	391.8	394.9	398.1	401.0
10,0°	343.9	349.5	354.8	360.2	366.0	371.9	377.8	383.3	388.2	392.8	397.0	400.9	404.6	408.4	411.6
12,5°	344.1	351.1	357.8	364.1	370.8	377.7	384.7	390.7	396.2	401.1	405.6	409.8	413.7	417.5	420.9
15,0°	345.2	354.0	361.7	368.8	376.4	384.0	391.8	398.4	404.4	409.7	414.4	418.6	422.4	426.1	429.4
17,5°	346.0	355.9	364.6	372.8	380.9	389.2	397.4	404.5	411.2	416.8	421.8	426.0	430.1	433.7	436.8
20,0°	347.7	358.7	368.2	376.5	385.1	393.3	401.5	409.0	415.8	421.3	426.1	430.2	433.9	437.4	440.2
22,5°	348.9	361.4	371.2	380.1	388.6	396.9	404.8	412.0	418.8	424.3	428.6	432.1	435.0	437.6	439.8
25,0°	350.4	363.3	373.7	382.5	390.9	398.7	406.5	413.3	419.5	424.4	428.6	431.9	434.0	436.1	437.7
27,5°	352.9	365.9	376.2	384.4	392.1	399.5	407.0	413.8	419.9	424.9	428.2	430.6	432.0	432.8	432.9
30,0°	354.2	367.9	378.8	387.7	395.7	402.6	409.5	415.3	420.2	423.9	426.8	428.7	429.5	429.0	427.5
32,5°	358.0	371.5	382.4	390.4	397.6	404.1	411.0	417.3	422.7	425.9	427.3	427.3	425.9	423.9	421.1
35,0°	363.7	377.0	387.3	395.7	403.4	410.2	415.9	419.9	422.5	425.1	426.9	427.3	425.5	420.1	413.9
37,5°	364.3	377.7	389.3	398.9	406.3	411.4	416.7	422.4	427.3	429.7	428.0	423.2	419.2	416.0	409.9
40,0°	364.6	378.1	389.8	399.3	406.4	412.9	420.3	425.6	426.9	424.4	422.6	422.1	420.2	411.6	398.9
42,5°	366.5	379.9	392.5	403.5	411.2	418.3	424.5	427.4	427.0	426.9	425.5	419.9	411.2	402.8	395.4
45,0°	372.6	385.7	398.3	410.3	420.6	428.5	435.3	438.7	439.0	436.5	431.8	423.9	412.3	400.5	384.3
47,5°	371.0	387.0	402.4	416.3	428.2	440.2	451.2	458.3	456.0	448.1	441.4	430.6	417.1	403.2	383.6
50,0°	372.6	387.9	404.4	420.9	436.1	452.8	468.6	473.6	471.1	465.5	456.1	442.1	421.8	402.4	379.2
52,5°	371.0	392.3	409.5	430.5	456.6	480.2	495.4	494.1	483.8	477.1	468.3	454.5	432.5	408.2	381.1
55,0°	371.3	393.3	411.6	428.4	456.6	484.9	504.4	511.3	506.2	496.1	482.6	462.3	434.6	408.8	385.8
57,5°	389.7	406.7	435.2	459.5	484.3	507.0	523.8	528.6	523.9	504.5	487.9	466.5	436.1	403.9	376.6
60,0°	404.5	420.8	453.9	486.2	524.6	543.5	557.6	571.4	566.2	534.5	502.7	479.6	451.2	407.2	372.6
62,5°	388.9	410.8	450.0	494.0	540.4	568.8	585.8	603.9	606.7	573.4	530.7	498.0	456.4	406.2	365.9
65,0°	383.0	433.0	499.0	529.1	549.6	553.2	573.4	588.6	612.0	568.5	529.6	494.3	446.7	401.4	359.8
67,5°	395.1	434.6	503.0	525.1	536.3	541.9	583.3	569.7	562.5	522.9	487.9	446.4	396.9	364.2	330.4
70,0°	426.1	444.5	503.1	554.4	550.7	627.5	580.9	535.8	516.4	479.9	421.6	355.7	299.7	273.3	256.2
72,5°	440.7	442.5	505.1	561.0	554.6	570.8	505.6	448.7	436.3	393.6	315.4	246.7	202.7	179.6	161.8
75,0°	353.4	353.2	367.5	449.0	400.5	388.9	318.4	282.4	270.2	255.8	213.4	173.4	150.4	138.4	122.7
77,5°	153.0	205.1	206.9	212.1	170.9	150.7	128.2	120.2	120.9	126.0	124.3	112.0	102.4	92.8	76.5
80,0°	50.0	70.6	61.8	49.7	44.1	45.7	58.2	61.5	58.1	51.4	54.3	52.5	46.8	41.2	34.1
82,5°	10.3	10.3	10.4	10.8	11.5	13.2	15.9	13.6	14.2	12.7	13.7	12.2	11.3	10.9	10.4
85,0°	6.2	6.3	6.4	6.4	6.4	6.4	6.4	6.3	6.2	6.0	5.9	5.7	5.5	5.4	5.2
87,5°	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.1	3.1	3.0	2.9	2.8	2.8	2.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3B41E08LE EAN: 4058352584019	LP number 59338_260
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6
2,5°	373.1	374.3	375.4	376.3	377.2	378.1	379.2	380.1	380.9	381.5	382.2	382.5	382.8	382.9	383.1
5,0°	390.2	392.4	394.6	396.6	398.4	400.1	401.9	403.5	405.1	406.4	407.6	408.5	409.2	409.8	410.4
7,5°	404.0	406.9	409.7	412.2	414.6	416.9	419.1	421.3	423.2	424.9	426.4	427.7	428.8	429.8	430.6
10,0°	414.9	418.2	421.3	424.0	426.6	429.1	431.5	433.9	436.1	437.9	439.7	441.0	442.4	443.6	444.7
12,5°	424.3	427.4	430.5	433.3	435.8	438.1	440.3	442.4	444.3	446.0	447.5	448.9	450.3	451.4	452.5
15,0°	432.4	434.9	437.5	439.7	441.8	443.6	445.2	446.8	448.1	449.4	450.5	451.4	452.3	453.3	454.4
17,5°	439.5	441.5	443.0	444.1	445.2	446.1	446.6	447.3	448.0	448.5	449.2	449.5	450.0	450.5	451.1
20,0°	442.5	444.2	445.6	446.4	446.6	446.3	445.8	445.0	444.4	444.0	443.7	443.5	443.5	443.4	443.5
22,5°	441.4	442.5	443.3	443.5	443.4	442.7	441.4	439.7	437.6	435.5	433.9	432.7	431.7	431.0	430.4
25,0°	438.0	437.9	437.5	436.5	435.5	434.2	432.2	429.5	426.4	423.1	420.1	417.5	415.6	414.3	413.1
27,5°	432.0	430.3	428.5	426.4	423.9	421.2	418.0	414.1	409.6	404.9	400.8	397.1	394.1	391.8	390.3
30,0°	424.3	421.1	417.3	413.5	409.4	404.7	400.0	394.2	388.3	382.2	377.1	372.6	369.0	366.0	364.1
32,5°	416.4	411.0	405.2	399.1	392.4	385.5	378.5	371.0	363.7	356.4	349.8	343.8	339.5	336.4	333.7
35,0°	407.1	399.5	391.2	383.1	374.4	365.2	355.9	345.6	336.1	326.9	318.7	311.6	305.8	301.1	297.7
37,5°	398.9	387.2	377.6	368.5	357.6	345.6	333.3	320.6	309.2	297.8	288.0	279.8	272.8	266.4	261.4
40,0°	388.6	377.7	363.4	350.5	338.1	323.8	309.4	294.9	281.7	269.4	258.6	248.9	240.1	232.1	225.1
42,5°	379.2	360.5	347.3	333.0	315.9	301.4	286.9	272.2	257.8	244.2	231.8	220.1	209.5	200.4	192.6
45,0°	365.4	350.4	331.0	312.4	298.3	281.2	265.0	248.4	233.3	218.4	204.6	191.6	180.5	170.9	162.5
47,5°	362.9	340.3	318.3	301.3	276.8	261.3	243.9	225.2	209.7	194.5	180.2	167.1	155.9	146.2	137.3
50,0°	358.5	332.7	308.1	282.4	259.1	239.4	221.4	202.3	184.7	169.9	156.6	144.4	133.2	123.0	113.7
52,5°	352.1	321.5	295.1	264.4	238.8	217.9	199.1	178.1	159.4	147.4	136.2	124.6	113.4	103.0	93.8
55,0°	356.2	320.6	284.5	247.5	219.6	197.7	175.7	154.3	140.6	126.9	117.0	105.7	94.7	84.5	75.9
57,5°	347.0	311.5	276.9	244.0	214.2	192.1	163.1	139.5	125.2	111.5	98.1	87.0	76.7	67.7	60.7
60,0°	344.3	308.6	273.8	243.2	217.0	186.5	153.9	129.8	113.3	97.9	80.8	69.3	60.8	53.8	48.7
62,5°	334.9	296.8	262.4	233.7	202.4	168.2	143.9	121.9	98.3	72.4	61.5	53.8	47.9	43.2	39.6
65,0°	329.6	288.2	251.2	219.6	182.4	145.9	118.5	99.9	75.6	58.4	48.8	42.7	38.2	34.9	32.5
67,5°	310.0	272.8	237.0	203.4	161.9	127.5	103.9	68.6	52.6	43.6	38.1	34.0	30.6	28.2	26.6
70,0°	242.7	220.5	205.0	179.0	139.2	111.9	84.9	57.0	44.3	33.6	29.5	26.4	24.1	22.8	21.9
72,5°	159.0	155.2	154.1	140.7	110.4	96.1	59.4	43.8	33.2	25.7	21.4	19.6	18.8	18.2	17.8
75,0°	105.3	97.6	92.3	83.4	66.5	53.3	32.1	32.0	22.5	17.9	16.4	15.4	14.7	14.3	14.2
77,5°	63.0	57.1	49.0	45.4	40.8	27.8	21.4	19.6	14.2	13.3	12.6	12.0	11.5	11.1	10.9
80,0°	26.2	24.3	22.6	17.3	14.0	13.2	14.1	12.7	10.2	9.6	9.2	8.8	8.5	8.3	7.9
82,5°	9.1	8.7	8.5	7.7	7.5	7.3	7.0	6.8	6.6	6.4	6.2	6.0	5.8	5.7	5.4
85,0°	5.1	5.1	4.9	4.8	4.6	4.5	4.3	4.1	3.8	3.6	3.3	3.2	3.1	3.1	3.1
87,5°	2.6	2.6	2.6	2.5	2.4	2.4	2.3	2.1	2.0	1.9	1.7	1.6	1.5	1.4	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3B41E08LE EAN: 4058352584019	LP number 59338_260
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6
2,5°	383.3	383.7	383.9	384.1	384.4	384.6	384.6	350.3	349.1	348.2	347.1	346.3	345.3	344.5	343.4
5,0°	410.9	411.5	412.0	412.5	412.8	412.9	413.0	345.8	343.2	340.5	337.9	335.3	332.8	330.2	327.6
7,5°	431.5	432.2	432.9	433.5	433.8	434.1	434.2	341.3	336.8	332.3	327.9	323.8	319.6	315.5	311.4
10,0°	445.6	446.5	447.2	447.9	448.2	448.4	448.5	337.4	331.0	324.7	318.4	312.5	306.3	300.4	294.5
12,5°	453.6	454.4	455.1	455.7	456.0	456.3	456.4	335.6	327.3	319.0	310.7	302.7	294.3	286.4	278.5
15,0°	455.0	456.0	456.7	457.1	457.5	457.8	457.9	334.9	325.0	315.1	304.9	295.3	284.9	275.3	265.6
17,5°	451.8	452.6	453.0	453.5	453.8	454.1	454.2	334.1	322.2	310.6	298.8	287.4	275.8	264.6	253.7
20,0°	443.6	443.9	444.5	444.9	445.2	445.6	445.7	334.7	321.0	307.6	294.2	281.6	268.7	256.5	244.3
22,5°	430.4	430.2	430.5	431.0	431.5	431.9	432.2	334.3	319.4	304.8	289.9	276.2	262.3	249.2	235.9
25,0°	412.3	412.0	412.1	412.5	413.1	413.6	413.9	334.9	318.3	302.2	286.3	271.6	256.6	242.5	228.4
27,5°	389.1	388.4	388.2	388.5	389.1	389.7	389.7	335.8	318.1	300.0	282.3	266.5	251.0	235.8	220.2
30,0°	362.6	361.1	360.4	360.3	361.0	361.4	361.4	336.2	317.0	297.2	278.7	262.7	245.9	229.2	212.9
32,5°	331.4	329.3	327.8	327.2	327.3	327.6	327.5	339.9	318.9	297.4	278.0	261.8	243.4	224.7	206.7
35,0°	294.4	291.3	289.0	287.7	287.2	286.8	286.5	345.0	322.6	299.4	278.5	259.9	238.5	217.9	200.2
37,5°	257.2	253.2	250.0	247.8	246.4	245.4	244.8	344.9	321.1	295.9	274.5	255.0	231.6	210.9	194.7
40,0°	219.8	215.0	210.8	207.3	204.9	203.3	202.6	346.8	318.7	290.9	270.8	249.9	225.0	206.1	189.9
42,5°	186.1	180.1	174.7	170.2	167.0	165.0	164.3	344.6	311.6	282.4	262.5	238.4	213.1	196.7	175.7
45,0°	154.9	147.6	141.1	135.8	132.3	130.1	129.4	351.4	311.5	280.5	256.6	224.4	201.5	183.0	155.7
47,5°	128.9	120.9	114.0	108.3	104.6	102.5	101.8	346.0	301.3	268.4	238.5	203.9	185.9	156.3	131.4
50,0°	105.2	97.1	90.4	85.0	81.7	79.9	79.4	347.9	301.8	263.6	223.8	189.5	167.3	133.0	118.1
52,5°	85.4	77.8	72.0	67.7	65.4	64.0	63.6	341.1	290.7	250.0	209.8	180.0	149.3	122.3	106.1
55,0°	68.5	62.2	57.8	55.1	53.6	52.7	52.4	340.1	283.3	239.2	197.9	169.5	132.8	111.5	89.8
57,5°	54.8	50.5	47.5	45.8	44.9	44.2	44.1	358.4	294.5	241.3	192.4	159.8	123.7	100.2	78.5
60,0°	45.0	42.0	40.1	39.0	38.4	37.9	37.7	372.1	308.5	252.4	192.2	148.3	114.8	84.3	72.6
62,5°	37.1	35.2	33.9	33.2	32.8	32.5	32.4	363.9	307.8	251.7	179.4	126.8	96.8	75.1	64.4
65,0°	30.8	29.6	29.0	28.6	28.4	28.1	28.0	328.8	277.9	223.9	145.5	98.0	76.2	64.3	53.4
67,5°	25.7	25.1	24.7	24.4	24.2	24.0	23.9	338.6	259.4	184.3	115.3	80.8	67.7	56.0	47.4
70,0°	21.4	21.0	20.8	20.6	20.4	20.3	20.2	358.6	257.2	162.1	101.4	74.6	64.8	49.8	40.4
72,5°	17.4	17.2	17.1	16.9	16.7	16.6	16.6	335.2	240.6	184.7	112.8	59.2	46.1	34.5	33.5
75,0°	14.0	13.8	13.7	13.5	13.3	13.3	13.2	268.1	215.0	161.6	101.7	45.0	29.4	26.2	27.3
77,5°	10.7	10.5	10.3	10.2	9.9	9.8	9.6	138.3	134.3	95.9	50.4	21.9	19.1	19.8	21.0
80,0°	7.6	7.4	7.2	7.0	6.9	6.8	6.7	61.0	45.2	28.8	25.5	18.3	12.8	13.6	14.7
82,5°	5.1	4.9	4.7	4.6	4.5	4.4	4.3	10.1	9.2	8.6	8.2	7.8	7.8	8.1	8.4
85,0°	3.0	2.8	2.7	2.6	2.5	2.4	2.3	5.8	5.8	5.6	5.3	5.1	4.9	4.7	4.5
87,5°	1.2	1.2	1.2	1.1	1.0	0.9	0.9	3.2	3.1	3.0	2.9	2.8	2.7	2.7	2.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3B41E08LE EAN: 4058352584019	LP number 59338_260
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6
2,5°	342.5	341.5	340.5	339.1	337.4	335.7	334.2	333.3	332.3	331.4	330.5	329.4	328.5	327.5	326.8
5,0°	325.2	322.7	320.1	317.2	314.2	311.3	308.6	306.2	304.0	301.8	299.7	297.6	295.6	293.7	292.1
7,5°	307.3	303.1	299.0	294.8	290.5	286.4	282.4	278.9	275.6	272.4	269.2	266.2	263.4	260.7	258.3
10,0°	288.8	283.1	277.6	272.1	266.4	261.3	256.3	251.6	247.3	243.1	239.1	235.3	231.8	228.5	225.6
12,5°	270.9	263.5	256.3	249.3	242.5	236.1	230.1	224.6	219.5	214.6	210.0	205.8	201.9	198.1	194.8
15,0°	256.2	247.1	238.2	229.8	221.8	214.1	207.0	200.5	194.6	189.1	184.1	179.6	175.5	171.6	168.2
17,5°	242.8	232.1	222.1	212.4	203.1	194.9	186.7	179.3	172.6	166.6	161.1	156.3	152.1	148.3	145.1
20,0°	232.3	220.5	209.5	198.9	188.8	179.4	170.6	162.6	155.2	148.6	142.8	137.9	133.7	129.9	126.9
22,5°	223.1	210.7	198.7	187.2	176.5	166.6	157.2	148.6	140.6	133.7	127.8	122.8	118.7	115.2	112.5
25,0°	214.6	201.5	189.2	177.7	166.4	156.2	146.2	137.0	128.7	121.7	115.8	111.2	107.4	104.2	101.7
27,5°	205.6	192.2	179.7	168.0	156.2	145.4	135.3	126.5	118.5	111.7	106.2	101.9	98.6	95.9	93.6
30,0°	197.6	183.5	170.6	158.0	145.8	135.1	125.3	117.2	110.1	104.0	99.1	95.2	92.3	90.0	88.0
32,5°	190.9	175.8	161.1	147.6	135.5	125.3	116.7	109.3	102.9	97.5	93.3	90.1	87.6	85.4	83.6
35,0°	184.2	167.1	151.0	137.2	125.8	116.5	108.6	102.0	96.5	92.1	88.8	86.1	83.9	81.9	80.1
37,5°	178.0	158.9	141.7	128.8	117.5	108.5	101.3	96.0	92.0	88.6	86.0	83.7	81.7	79.6	77.7
40,0°	168.5	147.7	133.5	120.8	109.3	101.0	95.4	91.6	88.5	85.9	83.8	81.8	79.8	77.8	75.7
42,5°	151.9	136.6	124.1	109.6	99.9	94.9	91.3	88.4	86.1	84.2	82.4	80.6	78.5	76.2	73.9
45,0°	137.3	124.8	108.5	97.2	92.9	90.1	87.6	85.7	84.1	82.6	81.0	79.0	76.8	74.4	72.0
47,5°	120.4	105.9	94.1	90.1	87.6	85.5	83.9	82.8	81.9	80.6	79.1	77.1	75.1	72.4	69.7
50,0°	102.4	88.1	84.3	82.5	81.2	80.4	80.1	79.8	79.0	78.0	76.5	74.7	72.4	69.7	67.0
52,5°	86.3	80.5	77.4	76.1	75.5	75.5	75.7	75.9	75.7	74.9	73.2	71.5	69.3	66.8	64.0
55,0°	79.7	74.5	71.4	69.9	69.4	69.9	70.5	70.9	71.1	70.7	69.6	68.0	65.7	63.2	60.5
57,5°	71.0	65.7	62.1	62.4	63.4	64.7	65.3	65.7	65.8	65.4	64.9	63.9	62.0	59.6	56.8
60,0°	65.2	58.1	56.9	57.6	58.6	59.4	60.0	60.2	60.2	60.2	60.0	59.2	57.8	55.5	52.8
62,5°	55.7	53.1	53.3	54.1	54.7	55.3	55.3	55.0	54.6	54.4	54.1	53.4	52.4	50.5	48.3
65,0°	49.2	48.7	49.3	50.1	50.9	51.3	51.1	50.6	50.1	49.3	48.4	47.3	46.5	44.9	43.2
67,5°	44.8	45.1	45.3	45.8	46.1	46.2	46.0	45.7	45.0	44.1	43.0	42.0	40.5	38.9	37.7
70,0°	40.2	41.1	41.3	41.4	41.4	41.2	40.9	40.7	39.9	39.0	38.1	37.1	35.4	33.9	32.6
72,5°	34.5	36.1	36.6	36.6	36.5	36.4	36.0	35.3	34.8	34.4	33.6	32.2	30.8	29.4	28.3
75,0°	28.8	30.2	30.9	31.3	31.4	31.4	31.3	30.8	30.3	30.0	29.2	28.0	26.7	25.5	24.4
77,5°	22.6	23.8	24.8	25.3	25.5	25.8	26.0	25.8	25.6	25.8	25.0	24.0	22.8	21.7	20.6
80,0°	15.8	16.8	17.7	18.5	19.0	19.2	19.2	19.2	19.4	20.1	19.8	19.2	18.4	17.6	16.9
82,5°	8.9	9.3	9.8	10.6	11.3	11.8	12.0	12.1	12.1	12.5	13.0	13.0	12.9	12.7	12.5
85,0°	4.4	4.3	4.2	4.0	3.9	3.8	3.8	3.9	4.0	4.2	4.6	5.0	5.5	5.9	6.2
87,5°	2.6	2.4	2.3	2.3	2.2	2.1	2.0	2.0	1.9	1.9	1.8	1.7	1.5	1.4	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3B41E08LE EAN: 4058352584019	LP number 59338_260
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	354.6	0.5	0.5
2,5°	326.1	325.4	324.7	324.0	323.3	322.7	322.1	321.6	320.9	320.4	320.0	319.8	319.7	4.2	4.8
5,0°	290.4	289.0	287.5	286.3	285.1	284.0	283.0	282.1	281.2	280.5	279.9	279.6	279.4	8.3	13.1
7,5°	255.9	253.8	251.8	250.0	248.3	246.8	245.5	244.3	243.3	242.4	241.8	241.4	241.3	12.2	25.3
10,0°	222.7	220.1	217.7	215.5	213.5	211.8	210.3	209.0	207.9	207.0	206.4	206.1	205.9	15.9	41.3
12,5°	191.7	189.1	186.5	184.1	182.1	180.3	178.7	177.3	176.3	175.4	174.8	174.5	174.5	19.4	60.6
15,0°	165.0	162.3	159.8	157.6	155.6	153.8	152.3	151.1	150.1	149.3	148.8	148.5	148.4	22.6	83.3
17,5°	142.0	139.5	137.2	135.2	133.4	131.9	130.5	129.4	128.5	127.8	127.3	127.0	127.0	25.7	108.9
20,0°	124.1	121.9	119.9	118.1	116.6	115.3	114.1	113.1	112.4	111.8	111.3	111.0	110.9	28.5	137.4
22,5°	110.0	108.0	106.2	104.7	103.4	102.3	101.3	100.4	99.7	99.1	98.8	98.6	98.5	31.1	168.5
25,0°	99.6	97.9	96.3	94.9	93.7	92.7	91.8	91.1	90.5	89.9	89.6	89.4	89.3	33.4	201.9
27,5°	91.6	90.1	88.7	87.4	86.3	85.4	84.5	83.8	83.3	82.9	82.5	82.3	82.3	35.4	237.3
30,0°	86.2	84.6	83.2	81.9	80.9	80.0	79.3	78.6	78.0	77.6	77.3	77.1	77.1	37.0	274.3
32,5°	81.9	80.5	79.1	77.9	76.7	75.6	74.8	74.1	73.4	72.9	72.7	72.5	72.5	38.3	312.7
35,0°	78.4	76.8	75.4	74.1	72.9	71.7	70.7	69.7	69.0	68.4	68.1	67.9	67.8	39.3	352.0
37,5°	75.9	74.1	72.5	70.9	69.5	68.2	67.0	66.0	65.2	64.5	64.1	63.9	63.8	39.9	391.9
40,0°	73.5	71.5	69.7	67.9	66.2	64.7	63.3	62.2	61.4	60.7	60.2	60.0	59.8	40.2	432.1
42,5°	71.4	69.2	67.1	65.0	63.0	61.4	60.0	58.7	57.8	57.1	56.6	56.3	56.2	40.3	472.4
45,0°	69.3	66.9	64.3	62.0	59.8	58.0	56.4	55.0	54.1	53.3	52.8	52.4	52.3	40.4	512.8
47,5°	66.8	64.1	61.4	58.8	56.5	54.5	52.9	51.6	50.5	49.5	49.0	48.6	48.5	40.4	553.2
50,0°	64.0	61.2	58.2	55.7	53.2	51.1	49.3	47.8	46.6	45.7	45.0	44.7	44.6	40.4	593.6
52,5°	61.0	58.0	55.2	52.5	50.1	48.0	46.1	44.4	43.1	42.1	41.4	41.1	41.0	40.5	634.2
55,0°	57.7	54.8	51.9	49.3	46.9	44.9	42.9	41.3	40.0	38.9	38.2	37.8	37.7	40.5	674.7
57,5°	53.9	51.2	48.5	46.0	43.8	41.6	39.8	38.2	36.9	35.8	35.0	34.6	34.4	41.1	715.7
60,0°	49.9	47.3	44.9	42.7	40.5	38.5	36.7	35.1	33.8	32.7	32.0	31.6	31.4	42.3	758.0
62,5°	45.9	43.4	41.1	39.0	37.1	35.3	33.5	32.0	30.7	29.8	29.1	28.7	28.6	42.5	800.6
65,0°	41.1	39.3	37.6	35.6	33.7	32.2	30.6	29.2	28.1	27.0	26.4	26.0	26.0	41.7	842.2
67,5°	36.4	35.0	33.5	32.1	30.6	29.2	27.8	26.5	25.5	24.5	23.8	23.4	23.2	39.6	881.8
70,0°	31.4	30.7	29.7	28.6	27.5	26.2	25.0	23.9	22.8	21.9	21.2	20.8	20.7	37.3	919.1
72,5°	27.4	26.5	25.6	24.9	24.0	23.0	22.0	20.8	19.8	19.0	18.4	17.9	17.9	32.6	951.7
75,0°	23.4	22.5	21.6	20.8	20.2	19.4	18.5	17.6	16.7	15.9	15.3	14.9	14.7	24.1	975.8
77,5°	19.7	18.9	18.0	17.2	16.4	15.7	15.2	14.3	13.5	12.8	12.1	11.8	11.7	13.5	989.3
80,0°	16.1	15.3	14.5	13.7	13.0	12.3	11.5	10.8	10.0	9.4	8.8	8.4	8.3	6.3	995.6
82,5°	12.1	11.6	11.2	10.6	9.8	9.1	8.2	7.4	6.7	6.3	5.8	5.6	5.5	2.5	998.2
85,0°	6.4	6.4	6.4	6.3	6.0	5.4	4.8	4.2	3.7	3.3	2.9	2.0	2.5	1.3	999.4
87,5°	1.3	1.2	1.2	1.2	1.3	1.4	1.3	1.3	1.1	0.8	0.5	0.3	0.3	0.6	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3B41E08LE EAN: 4058352584019	LP number 59338_260
--	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	9500	60.4	62.5	61.4
95	241	252	9014	57.0	59.0	58.0
90	229	250	8565	54.0	55.9	55.0
85	216	248	8079	50.7	52.5	51.6
80	203	246	7593	47.6	49.2	48.4
75	190	243	7106	44.4	46.0	45.2
70	178	241	6657	41.6	43.1	42.4
65	165	238	6171	38.5	39.8	39.2
60	152	235	5685	35.4	36.6	36.0
55	140	232	5236	32.7	33.7	33.2
50	127	229	4750	29.7	30.7	30.2
45	114	225	4264	26.7	27.6	27.2
40	102	221	3815	24.1	24.9	24.5
35	89	216	3329	21.4	22.0	21.7
30	76	210	2843	18.6	19.2	18.9
25	63	203	2356	15.9	16.3	16.1
20	51	195	1907	13.4	13.7	13.6
15	38	184	1421	10.5	10.8	10.6
13	34	180	1272	9.4	9.7	9.6