

Photometric test report

Family
Silica® 21



Order number: **51MX32DB39SB**
EAN: **4058352886915**

LP number
59279_96

serial
documentation
02.08.2023

Version Suspended luminaire, reflector, black, direct-/indirect distribution, wide distribution, $UGR \leq 16$ ($L65 \leq 1000 \text{ cd/m}^2$)

Lamps LED 3000 K | CRI ≥ 80

Controlgear ECG-DALI

Rated values Net luminous flux = 9110 lm
Power consumption = 58.5 W
Luminous efficacy = 155.7 lm/W


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 425 cd/klm

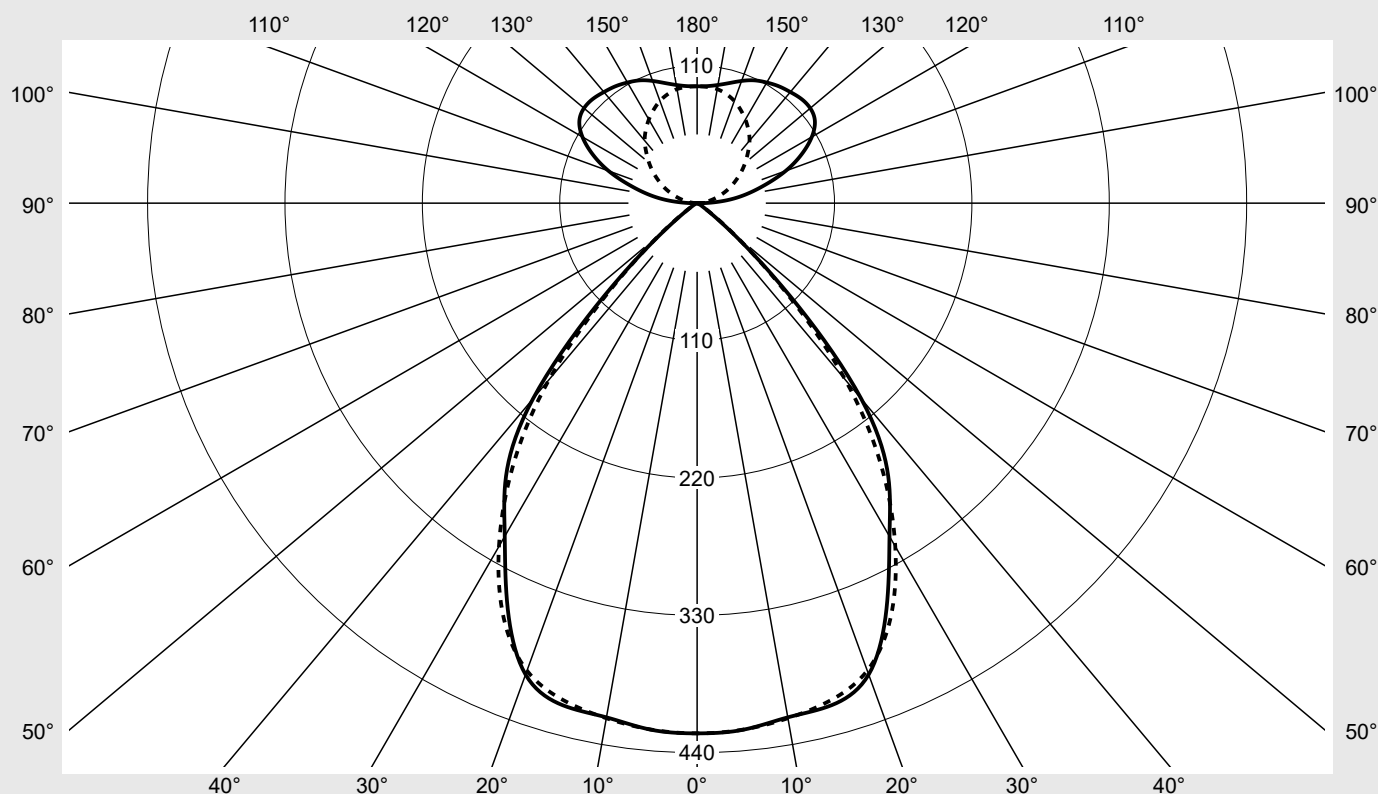

Classifications

DIN 5040 C 6 2
CIE N1=86 N2=99 N3=100
N4=59 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 59.2%
 ϕ_o 40.8%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX32DB39SB EAN: 4058352886915	LP number 59279_96
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	424.5	424.5	424.5	424.5	424.5	424.5	424.5	2.5	2.5
5°	423.2	423.7	423.1	423.1	423.3	423.7	423.1	20.2	22.8
10°	418.0	417.2	417.3	418.4	419.3	417.7	418.7	39.8	62.6
15°	416.1	416.5	413.5	413.8	413.5	412.7	412.2	58.7	121.3
20°	401.6	404.7	402.8	404.0	399.5	397.4	398.3	75.3	196.5
25°	358.7	364.9	370.6	376.3	375.4	369.4	366.5	85.7	282.2
30°	308.1	312.2	314.3	321.5	326.7	320.5	317.3	87.1	369.4
35°	266.7	269.2	262.0	257.7	262.2	261.4	257.3	82.5	451.9
40°	204.3	207.3	203.4	196.7	194.2	189.2	184.5	69.6	521.5
45°	105.6	109.2	112.9	113.5	110.1	103.6	98.8	42.1	563.6
50°	35.1	38.0	43.5	46.6	44.5	40.2	37.5	17.4	581.0
55°	9.3	10.9	14.6	18.5	15.5	12.0	10.3	6.1	587.1
60°	3.6	4.0	5.4	7.2	5.8	4.5	4.1	2.4	589.5
65°	1.2	1.4	2.0	2.5	2.2	1.8	1.6	0.9	590.5
70°	0.8	0.8	0.6	0.6	0.7	0.9	0.9	0.4	590.8
75°	0.2	0.2	0.2	0.3	0.2	0.3	0.2	0.1	591.0
80°	0.0	0.0	0.0	0.1	0.1	0.1	0.1	0.0	591.0
85°	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.2	591.2
90°	4.7	4.5	4.8	4.8	2.8	1.0	0.4	1.9	593.1
95°	21.9	22.4	24.0	22.7	14.5	7.5	3.9	9.5	602.5
100°	39.1	40.2	40.5	35.5	23.8	13.4	8.9	16.0	618.5
105°	56.1	57.3	56.2	48.0	32.8	20.3	14.9	22.1	640.6
110°	75.4	75.7	70.9	59.1	42.1	27.5	21.3	27.8	668.4
115°	92.2	91.4	84.2	69.3	51.0	34.7	28.4	32.4	700.7
120°	106.0	104.3	95.1	77.6	59.4	41.8	35.4	35.5	736.3
125°	115.1	111.9	101.7	85.2	66.4	48.4	42.8	36.9	773.1
130°	118.2	115.6	104.8	89.7	71.8	55.3	50.2	36.5	809.6
135°	118.0	115.6	106.0	92.7	76.1	61.7	57.6	34.9	844.5
140°	116.1	114.4	106.3	94.9	79.7	67.7	65.3	32.5	877.0
145°	114.2	113.0	106.3	96.1	83.1	73.4	71.6	29.6	906.6
150°	111.5	111.1	105.1	96.0	85.8	78.8	77.3	26.1	932.7
155°	108.5	108.2	102.4	95.6	87.9	83.6	82.4	22.1	954.8
160°	104.1	103.9	99.3	94.8	89.7	87.3	87.1	17.8	972.6
165°	99.5	99.0	96.7	93.7	91.6	90.3	90.4	13.4	986.0
170°	96.1	95.6	95.0	93.7	92.8	92.7	92.7	9.0	995.0
175°	94.1	94.0	93.5	93.3	93.3	93.4	93.4	4.5	999.4
180°	93.6	93.6	93.6	93.6	93.6	93.6	93.6	0.6	1000.0

Photometric test report


Family Silica® 21	Order number: 51MX32DB39SB EAN: 4058352886915	LP number 59279_96
----------------------	--	-----------------------

UGR-Table		Standard room							siteco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	16.3	17.1	17.1	18.0	19.0	16.1	17.0	16.9	17.8	18.8
	3H	16.0	16.7	16.9	17.6	18.7	15.8	16.6	16.7	17.5	18.5
	4H	15.8	16.5	16.7	17.4	18.5	15.7	16.4	16.6	17.3	18.4
	6H	15.7	16.3	16.6	17.2	18.3	15.5	16.2	16.4	17.1	18.2
	8H	15.6	16.1	16.5	17.1	18.2	15.4	15.9	16.3	16.9	18.0
	12H	15.5	16.0	16.4	16.9	18.1	15.3	15.9	16.3	16.8	18.0
4H	2H	15.9	16.6	16.8	17.5	18.6	15.7	16.4	16.6	17.2	18.4
	3H	15.6	16.2	16.5	17.1	18.3	15.4	16.0	16.3	16.9	18.1
	4H	15.5	16.0	16.4	16.9	18.1	15.3	15.8	16.2	16.7	17.9
	6H	15.3	15.7	16.2	16.7	17.9	15.1	15.6	16.1	16.5	17.7
	8H	15.2	15.6	16.2	16.5	17.8	15.0	15.4	16.0	16.4	17.6
	12H	15.1	15.4	16.1	16.4	17.6	14.9	15.3	15.9	16.2	17.5
8H	4H	15.2	15.6	16.2	16.6	17.8	15.0	15.4	16.0	16.4	17.6
	6H	15.1	15.4	16.1	16.4	17.6	14.9	15.2	15.8	16.1	17.4
	8H	15.0	15.3	16.0	16.3	17.5	14.8	15.1	15.8	16.1	17.3
	12H	14.9	15.1	15.9	16.1	17.4	14.7	15.0	15.7	15.9	17.2
12H	4H	15.1	15.5	16.1	16.4	17.7	14.9	15.3	15.9	16.2	17.4
	6H	15.0	15.3	16.0	16.2	17.5	14.8	15.1	15.8	16.0	17.3
	8H	14.9	15.1	15.9	16.1	17.4	14.7	14.9	15.7	15.9	17.2

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1470 B = 49	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	18894.2	19529.1	20193.1	20307.0	19696.2	18538.1	17678.6
50°	6911.2	7475.3	8557.1	9160.0	8753.7	7916.1	7385.8
55°	2044.1	2412.3	3214.0	4079.3	3423.3	2636.3	2266.8
60°	914.2	1018.9	1361.1	1811.9	1470.9	1147.4	1042.2
65°	372.6	427.9	592.8	752.7	667.7	528.2	484.8
70°	296.2	308.8	228.2	214.8	258.5	332.4	335.4
75°	82.1	109.9	89.4	125.1	114.8	137.8	120.2
80°	21.1	21.1	30.6	45.9	61.9	71.4	81.6
85°	571.7	571.7	555.8	542.7	535.5	534.0	545.6

Photometric test report

Family Silica® 21	Order number: 51MX32DB39SB EAN: 4058352886915	LP number 59279_96	
Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85°			

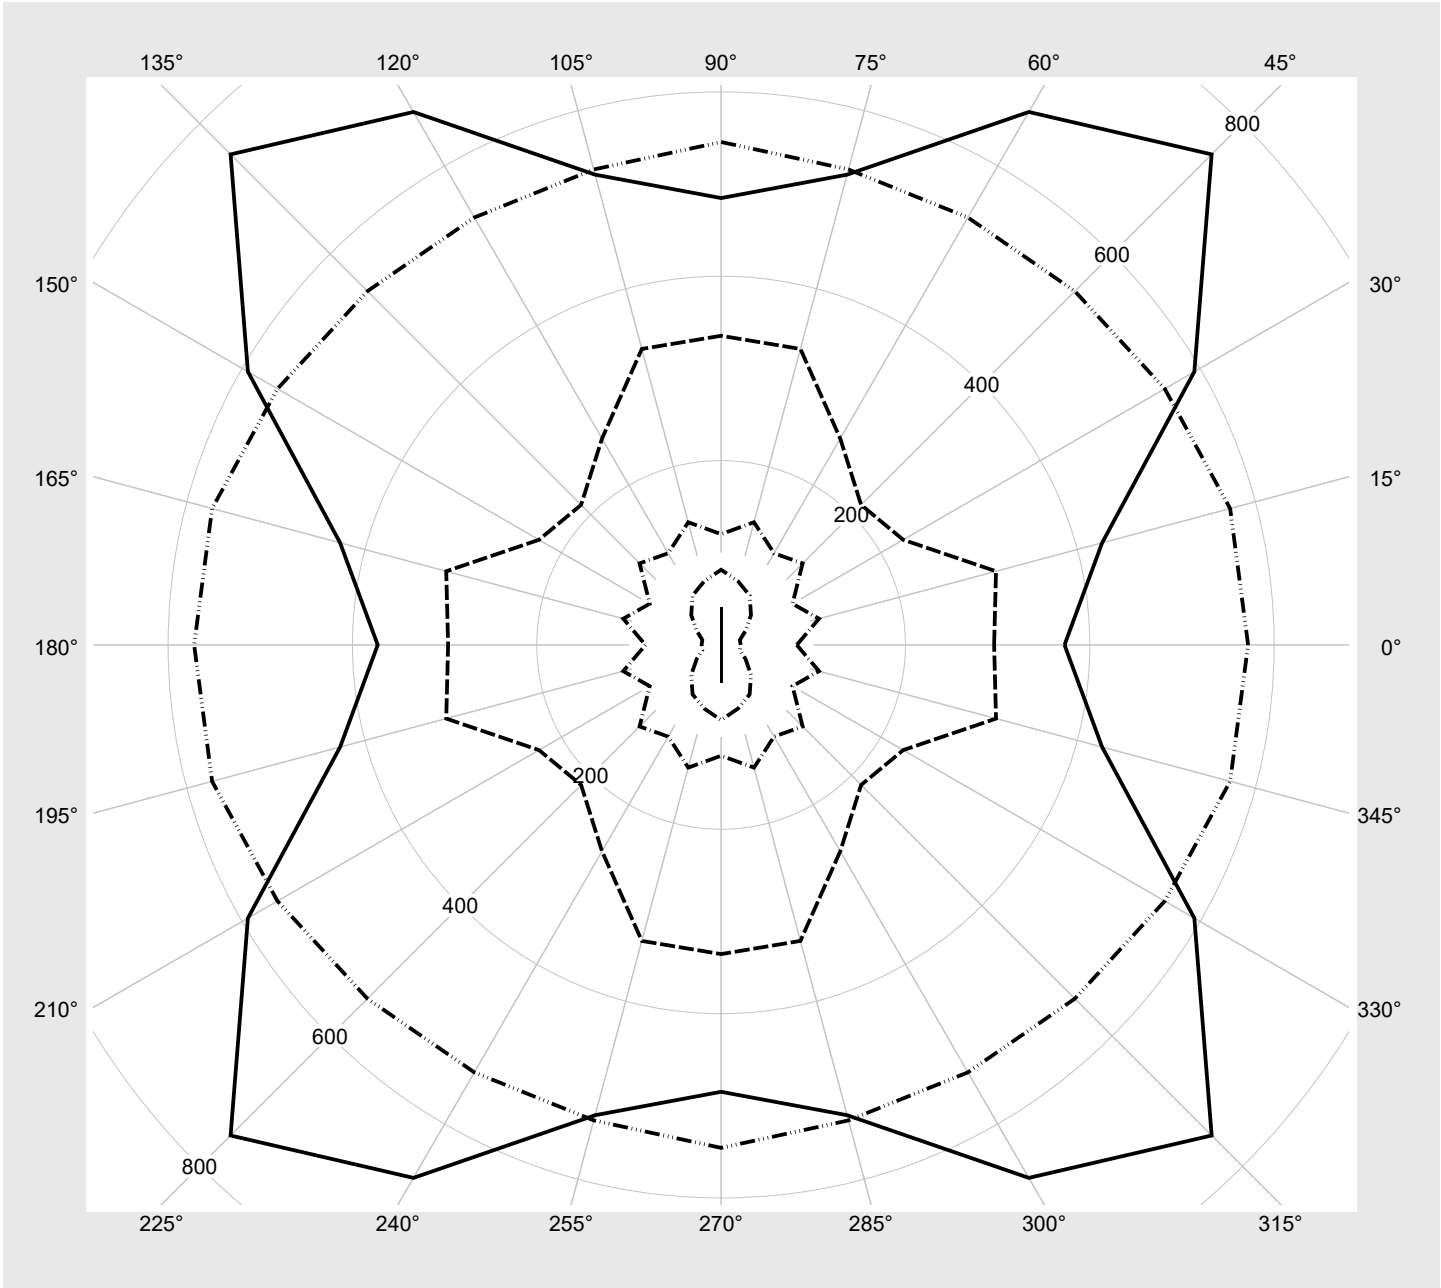

Photometric test report

Family Silica® 21	Order number: 51MX32DB39SB EAN: 4058352886915	LP number 59279_96
Dimming levels table environmental temperature: 25°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	9110	58.5
95	240	252	8638	55.3
90	227	250	8197	52.4
85	214	248	7752	49.4
80	201	245	7304	46.4
75	187	243	6817	43.4
70	174	240	6362	40.5
65	161	237	5904	37.5
60	149	234	5479	34.8
55	136	231	5015	32.0
50	123	227	4548	29.1
45	111	224	4113	26.5
40	98	219	3641	23.6
35	86	214	3201	20.9
30	73	208	2722	18.1
25	61	202	2275	15.5
20	49	194	1829	12.8
15	37	183	1380	10.2
10	25	169	928	7.6
5	12	142	437	5.0
2	5	110	171	4.2