




Photometric test report

Family Licross® 21 Recessed	Order number: 52TE11DN4AXG EAN: 4058352889367	LP number 58785_268
	Version cover frosted, narrow distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-DALI	serial documentation 03.08.2023
	Rated values Net luminous flux = 10120 lm Power consumption = 58.0 W Luminous efficacy = 174.5 lm/W	

Luminous intensity in cd/klm C180-0 C270-90 I_{max}: 2627 cd/klm

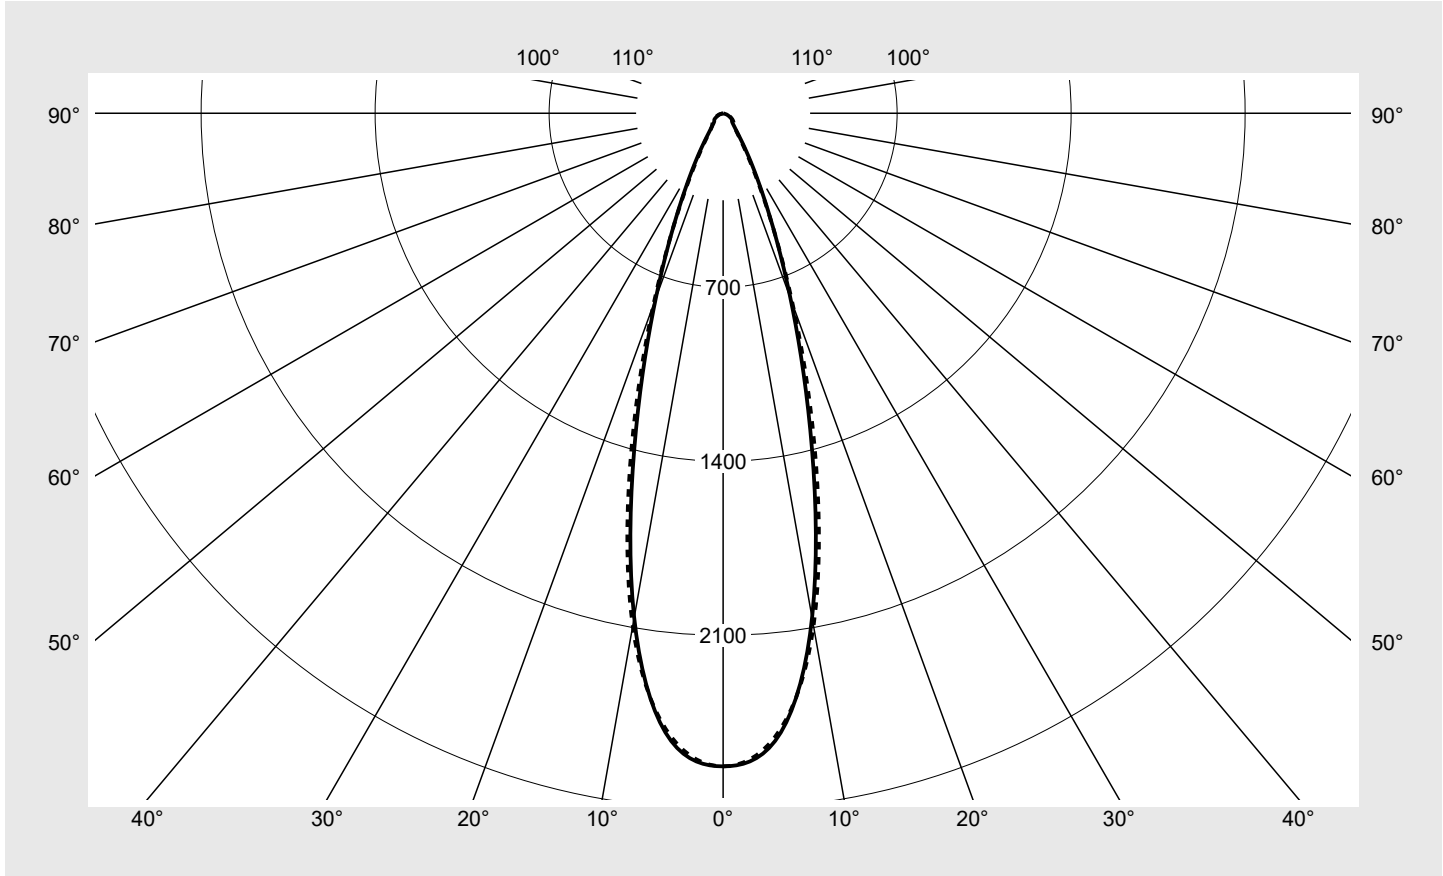

Classifications	
DIN 5040	A 7 0
CIE	N1=89 N2=96 N3=99 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE11DN4AXG EAN: 4058352889367	LP number 58785_268
--	--	--------------------------------------

sITeco

Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	2627.4	2627.4	2627.4	2627.4	2627.4	2627.4	2627.4	15.7	15.7
5°	2520.2	2503.8	2487.8	2499.1	2508.6	2505.8	2505.2	119.6	135.3
10°	2060.7	2047.7	2044.6	2066.8	2086.2	2092.0	2094.5	196.9	332.2
15°	1373.4	1369.0	1375.7	1399.2	1421.9	1432.7	1437.2	198.7	530.9
20°	791.8	790.8	796.4	808.8	818.0	819.0	819.4	151.2	682.1
25°	418.1	420.5	425.4	427.2	423.4	413.4	409.3	97.4	779.6
30°	215.7	218.7	224.8	222.9	213.7	202.3	197.8	58.9	838.4
35°	112.4	114.3	119.3	116.0	107.4	103.1	102.4	35.0	873.4
40°	70.3	69.7	69.6	67.8	65.2	68.3	71.3	24.2	897.6
45°	52.4	50.5	46.9	47.4	48.4	54.1	61.4	19.6	917.2
50°	46.4	44.6	38.1	38.0	38.3	44.7	54.3	17.8	935.0
55°	42.3	42.2	36.7	33.4	32.3	38.6	47.1	17.1	952.1
60°	32.7	32.9	34.3	30.2	28.0	32.6	38.2	15.3	967.4
65°	23.6	23.8	26.4	25.7	24.0	26.1	29.3	12.6	980.0
70°	15.1	15.6	18.2	19.4	18.6	19.5	20.9	9.4	989.4
75°	8.3	8.7	10.8	13.0	12.9	13.2	13.7	6.1	995.5
80°	4.0	4.1	5.0	6.6	7.3	7.2	7.2	3.2	998.7
85°	1.6	1.6	1.9	2.5	2.6	2.7	2.5	1.2	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE11DN4AXG EAN: 4058352889367	LP number 58785_268
---------------------------------------	--	-------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	15.4	16.5	15.8	16.8	17.1	15.3	16.4	15.7	16.8	17.1
	3H	16.3	17.3	16.7	17.6	18.0	16.7	17.7	17.1	18.0	18.4
	4H	16.5	17.4	16.9	17.8	18.2	17.3	18.1	17.7	18.5	18.9
	6H	16.7	17.4	17.1	17.8	18.2	17.6	18.4	18.0	18.8	19.2
	8H	16.8	17.4	17.2	17.8	18.2	17.8	18.4	18.2	18.8	19.2
	12H	16.8	17.3	17.2	17.7	18.2	17.8	18.4	18.2	18.8	19.2
4H	2H	15.9	16.8	16.3	17.2	17.5	15.8	16.7	16.2	17.1	17.5
	3H	17.0	17.8	17.5	18.2	18.6	17.4	18.1	17.8	18.5	18.9
	4H	17.3	18.0	17.8	18.4	18.8	18.0	18.6	18.4	19.1	19.5
	6H	17.5	18.0	17.9	18.4	18.9	18.4	19.0	18.9	19.4	19.9
	8H	17.5	18.0	18.0	18.4	18.9	18.5	19.0	19.0	19.5	19.9
	12H	17.5	17.9	18.0	18.4	18.9	18.6	19.0	19.1	19.5	20.0
8H	4H	17.6	18.0	18.0	18.5	19.0	18.2	18.7	18.7	19.1	19.6
	6H	17.7	18.1	18.2	18.6	19.1	18.7	19.1	19.2	19.6	20.1
	8H	17.8	18.1	18.3	18.6	19.1	18.8	19.2	19.3	19.7	20.2
	12H	17.8	18.1	18.3	18.6	19.1	18.9	19.2	19.5	19.7	20.3
12H	4H	17.6	18.0	18.1	18.4	19.0	18.2	18.6	18.7	19.0	19.5
	6H	17.8	18.1	18.3	18.6	19.1	18.7	19.0	19.2	19.5	20.0
	8H	17.8	18.1	18.4	18.6	19.2	18.9	19.1	19.4	19.6	20.2


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1500
			B = 58

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		8626.3	8302.5	7713.1	7791.1	7956.1	8907.1	10099.7	
50°		8402.2	8073.7	6887.2	6883.2	6927.3	8095.3	9820.4	
55°		8585.4	8561.2	7442.2	6767.3	6558.2	7829.9	9543.0	
60°		7603.7	7650.3	7978.3	7029.3	6508.4	7572.8	8885.6	
65°		6483.6	6556.0	7266.1	7083.9	6609.4	7182.1	8051.9	
70°		5138.6	5296.1	6206.5	6584.4	6339.5	6633.4	7110.2	
75°		3743.8	3918.2	4851.2	5844.0	5806.7	5922.2	6150.5	
80°		2647.3	2741.8	3367.4	4412.4	4882.0	4800.3	4841.2	
85°		2159.5	2190.1	2555.8	3313.9	3502.1	3583.5	3284.6	

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE11DN4AXG EAN: 4058352889367	LP number 58785_268
---------------------------------------	--	--------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

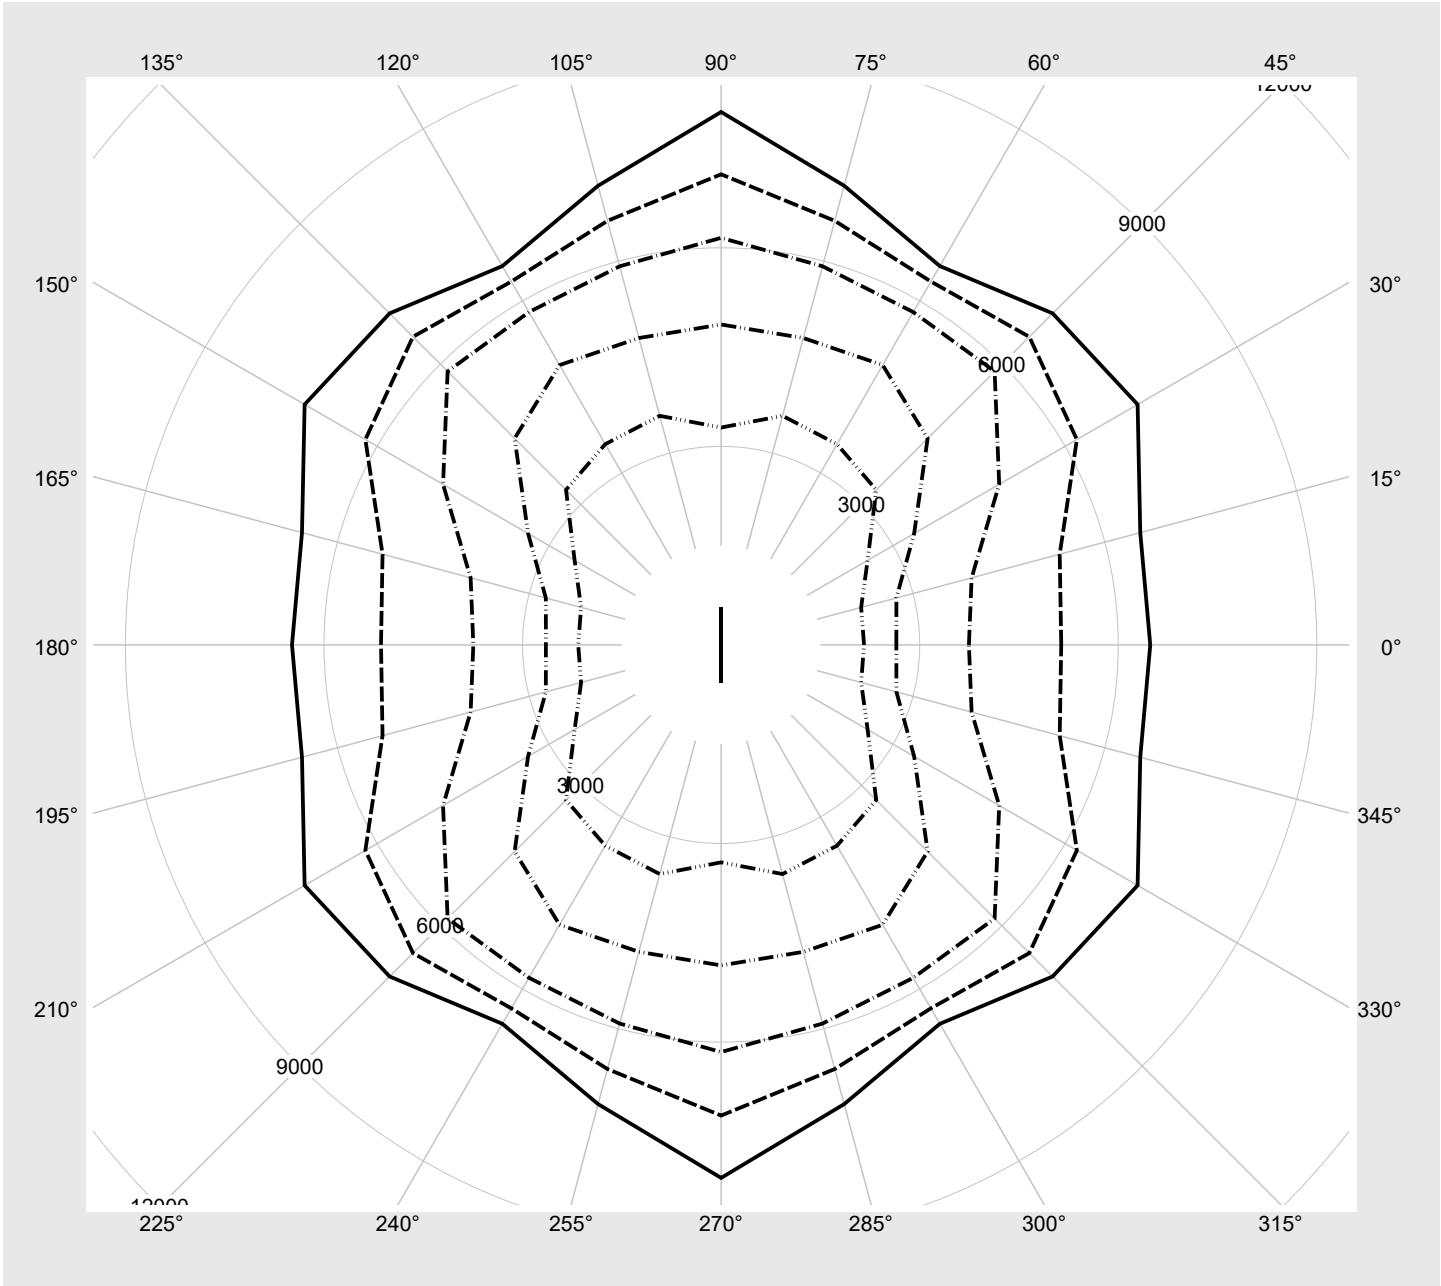

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE11DN4AXG EAN: 4058352889367	LP number 58785_268
---------------------------------------	--	--------------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	10120	58.0
95	240	252	9610	54.8
90	226	250	9095	51.5
85	213	248	8609	48.7
80	199	245	8083	45.5
75	186	243	7586	42.6
70	173	240	7086	39.6
65	160	237	6583	36.8
60	147	234	6074	33.9
55	134	231	5559	31.0
50	122	227	5079	28.4
45	109	223	4555	25.5
40	97	219	4068	22.9
35	84	213	3535	20.1
30	72	208	3038	17.5
25	60	201	2537	15.0
20	48	193	2033	12.3
15	36	182	1526	9.7
10	24	168	1015	7.2
5	12	142	501	4.6
2	4	102	156	3.0