

Photometric test report

Family
Licross® 21 Recessed

Order number: 52TE12DN4AXG
EAN: 4058352889572

LP number
59101_283




Version cover frosted, wide distribution, high visual comfort
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-DALI
Rated values Net luminous flux = 10280 lm
 Power consumption = 58.0 W
 Luminous efficacy = 177.2 lm/W

serial
documentation
03.08.2023

sitEco

Luminous intensity in cd/klm **C180-0** **C270-90**

Imax: 671 cd/klm

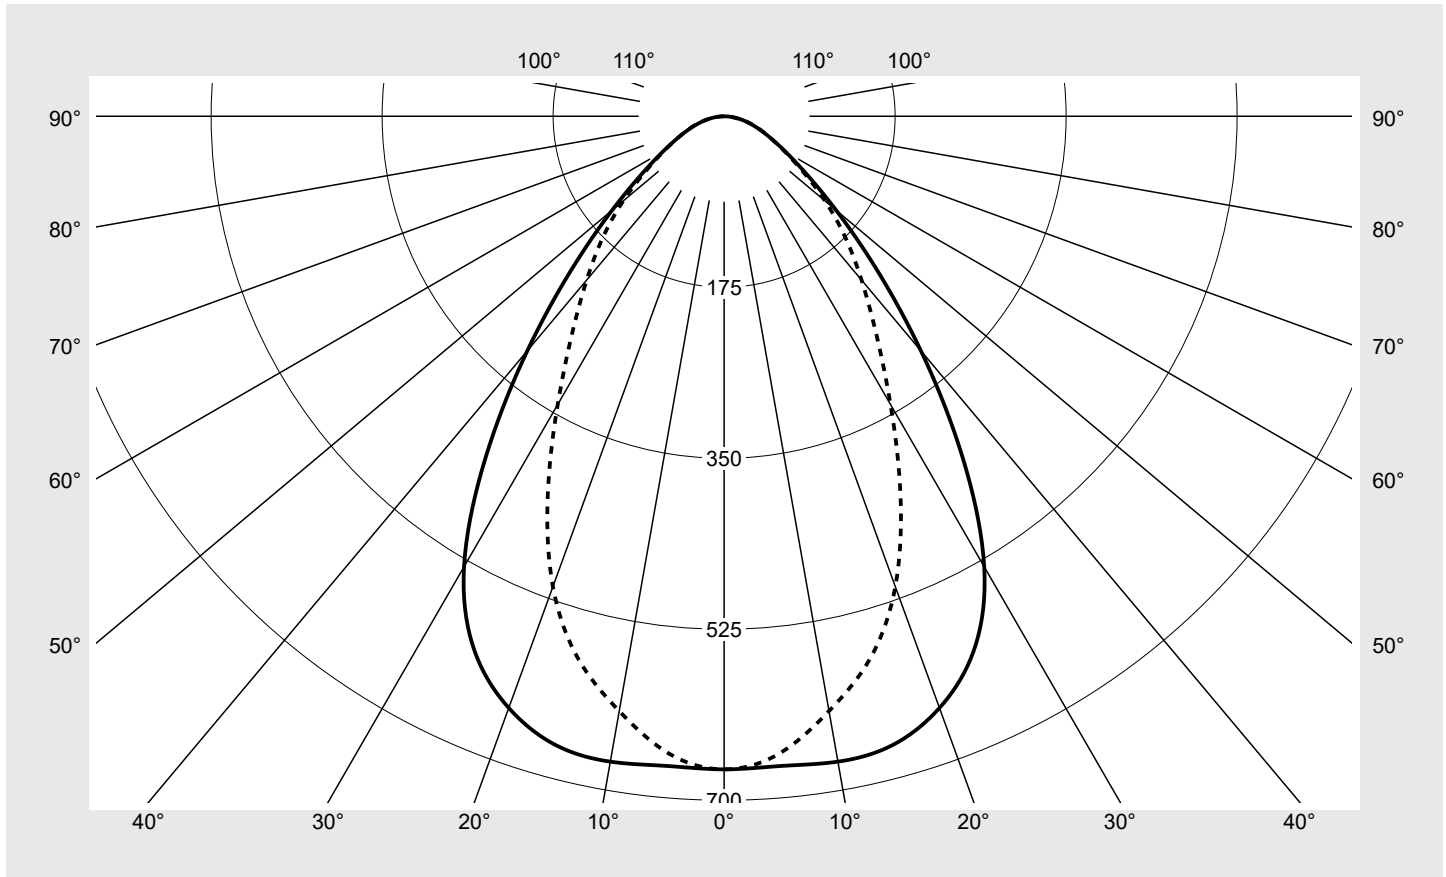

Classifications

DIN 5040 A 6 0
 CIE N1=72 N2=92 N3=99
 N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE12DN4AXG EAN: 4058352889572	LP number 59101_283
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	668.4	668.4	668.4	668.4	668.4	668.4	668.4	4.0	4.0
5°	667.5	664.4	657.4	655.8	655.7	654.2	654.4	31.4	35.4
10°	670.7	665.0	649.1	636.1	625.3	618.7	618.1	60.9	96.3
15°	666.2	657.2	632.9	612.0	594.0	578.5	575.5	87.4	183.7
20°	644.4	632.9	606.9	585.4	554.6	522.7	512.3	108.8	292.5
25°	604.1	590.6	566.7	541.2	494.5	444.9	427.0	121.8	414.2
30°	532.4	517.7	496.3	466.1	413.9	359.9	340.6	122.9	537.1
35°	425.0	409.7	387.0	361.9	325.4	286.0	271.1	111.0	648.1
40°	313.4	295.8	270.7	255.1	246.8	229.4	218.8	91.8	739.9
45°	219.2	200.3	175.7	171.1	181.8	184.7	175.5	71.8	811.7
50°	149.7	132.6	112.6	116.3	133.0	145.6	134.9	54.8	866.5
55°	102.7	89.1	74.7	81.5	98.1	107.9	98.1	41.3	907.7
60°	72.4	62.1	51.3	58.3	71.8	76.5	71.0	31.0	938.7
65°	52.1	44.3	35.9	41.6	51.4	54.2	52.1	23.1	961.9
70°	37.6	31.7	24.7	29.1	35.6	38.4	38.3	16.9	978.8
75°	26.0	21.3	16.2	19.0	22.9	25.9	26.8	11.6	990.4
80°	16.1	12.5	9.2	10.4	12.6	14.8	15.7	6.8	997.3
85°	7.0	5.4	3.8	4.1	4.8	5.7	5.8	2.7	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE12DN4AXG EAN: 4058352889572	LP number 59101_283
---------------------------------------	--	-------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	21.8	23.3	22.2	23.6	23.9	21.8	23.2	22.1	23.5	23.8
	3H	22.4	23.7	22.8	24.0	24.4	22.6	23.8	22.9	24.2	24.5
	4H	22.7	23.9	23.1	24.2	24.6	22.9	24.1	23.3	24.4	24.8
	6H	23.0	24.0	23.4	24.4	24.8	23.2	24.2	23.6	24.6	25.0
	8H	23.1	24.1	23.6	24.5	24.9	23.3	24.3	23.7	24.7	25.1
	12H	23.2	24.1	23.6	24.5	24.9	23.3	24.2	23.8	24.6	25.1
4H	2H	22.0	23.2	22.4	23.5	23.9	22.0	23.2	22.4	23.5	23.9
	3H	22.7	23.7	23.1	24.0	24.5	22.9	23.9	23.4	24.3	24.7
	4H	23.0	23.9	23.5	24.3	24.7	23.4	24.3	23.8	24.7	25.1
	6H	23.3	24.1	23.8	24.5	25.0	23.7	24.5	24.2	24.9	25.4
	8H	23.5	24.2	24.0	24.6	25.1	23.9	24.5	24.3	25.0	25.5
	12H	23.6	24.2	24.1	24.6	25.1	24.0	24.5	24.4	25.0	25.5
8H	4H	23.1	23.8	23.6	24.2	24.7	23.4	24.1	23.9	24.6	25.0
	6H	23.5	24.0	23.9	24.5	25.0	23.9	24.4	24.4	24.9	25.4
	8H	23.6	24.1	24.1	24.6	25.1	24.0	24.5	24.5	25.0	25.5
	12H	23.8	24.2	24.3	24.7	25.2	24.2	24.6	24.7	25.1	25.6
12H	4H	23.1	23.7	23.6	24.2	24.7	23.5	24.0	23.9	24.5	25.0
	6H	23.5	23.9	24.0	24.4	25.0	23.9	24.3	24.4	24.8	25.4
	8H	23.6	24.0	24.2	24.5	25.1	24.1	24.5	24.6	25.0	25.5

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1500
			B = 58


C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		36632.7	33479.1	29355.8	28597.5	30379.5	30864.3	29331.1	
50°		27516.0	24370.3	20700.8	21380.0	24447.9	26768.3	24789.8	
55°		21149.9	18360.6	15392.5	16794.3	20205.0	22238.1	20199.8	
60°		17105.4	14683.4	12125.2	13788.0	16960.1	18081.2	16773.9	
65°		14567.3	12398.5	10050.8	11637.8	14384.2	15141.3	14553.4	
70°		12981.4	10945.8	8534.7	10037.6	12287.3	13266.8	13233.2	
75°		11869.6	9722.9	7411.0	8664.2	10459.8	11806.1	12231.6	
80°		10947.9	8535.0	6279.3	7107.4	8592.2	10104.2	10711.8	
85°		9494.3	7312.9	5164.0	5568.0	6545.5	7665.4	7914.8	

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE12DN4AXG EAN: 4058352889572	LP number 59101_283
--	--	--------------------------------------

Luminance values in cd/m²

γ 65°
γ 70°
γ 75°
γ 80°
γ 85°

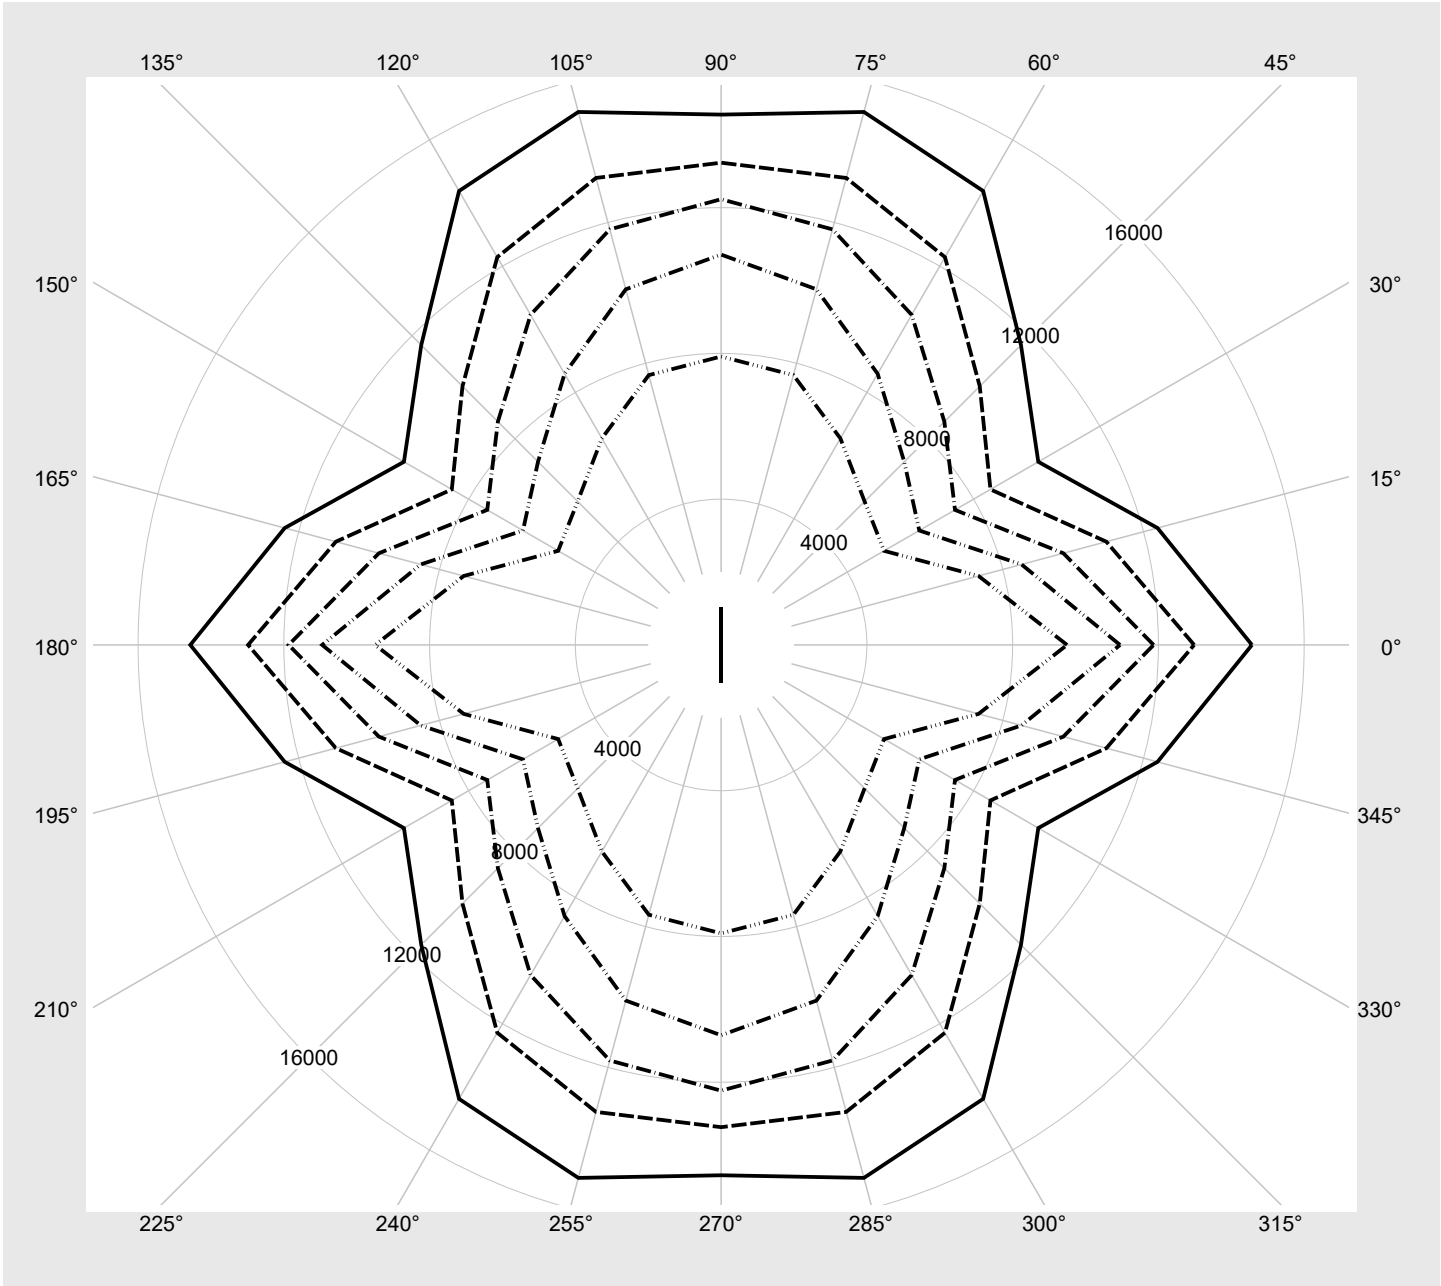

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE12DN4AXG EAN: 4058352889572	LP number 59101_283
---------------------------------------	--	--------------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	10280	58.0
95	240	252	9762	54.8
90	226	250	9239	51.5
85	213	248	8746	48.7
80	199	245	8210	45.5
75	186	243	7706	42.6
70	173	240	7198	39.6
65	160	237	6687	36.8
60	147	234	6170	33.9
55	134	231	5647	31.0
50	122	227	5159	28.4
45	109	223	4627	25.5
40	97	219	4132	22.9
35	84	213	3591	20.1
30	72	208	3086	17.5
25	60	201	2577	15.0
20	48	193	2065	12.3
15	36	182	1550	9.7
10	24	168	1031	7.2
5	12	142	509	4.6
2	4	102	158	3.0