

Photometric test report

Family
Licross® 21 Recessed

Order number: 52TE12DN4FXM
EAN: 4058352889589

LP number
59446_28



Version cover frosted, wide distribution, high visual comfort
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-DALI
Rated values Net luminous flux = 15000 lm
Power consumption = 84.6 W
Luminous efficacy = 177.3 lm/W

serial
documentation
03.08.2023


sitEco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 728 cd/klm

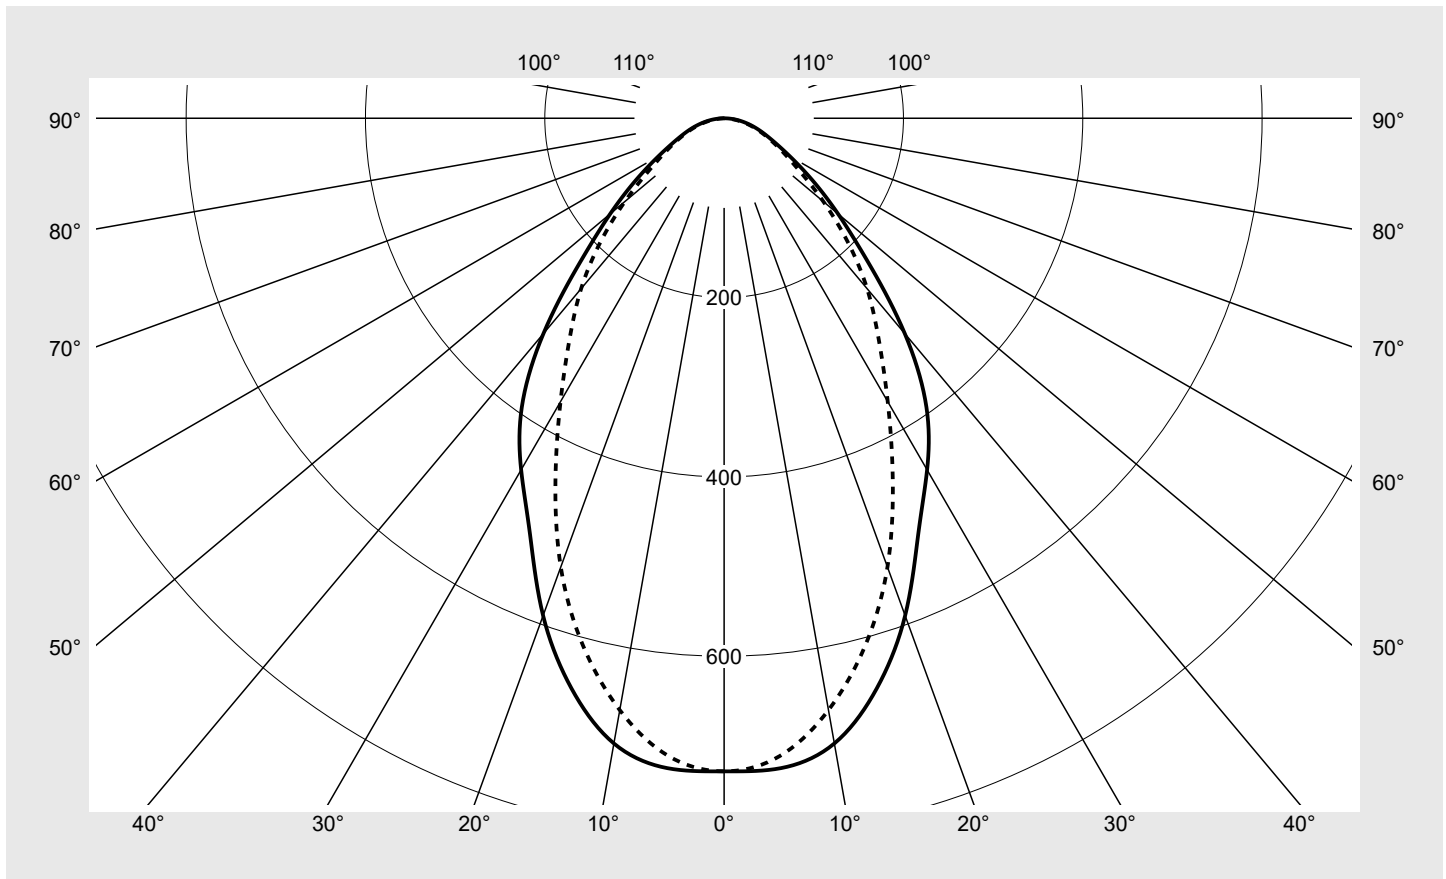

Classifications

DIN 5040 A 5 0
CIE N1=69 N2=91 N3=98
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE12DN4FXM EAN: 4058352889589	LP number 59446_28
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	728.4	728.4	728.4	728.4	728.4	728.4	728.4	4.4	4.4
5°	727.5	724.8	717.6	716.9	716.5	714.4	713.9	34.3	38.7
10°	708.0	704.6	693.5	687.1	680.0	672.5	670.2	65.5	104.1
15°	658.1	653.2	637.7	629.5	623.7	612.7	608.6	89.6	193.8
20°	590.3	582.5	562.9	551.9	546.6	538.5	532.6	104.5	298.2
25°	512.2	499.8	475.2	461.5	453.8	449.4	445.1	108.8	407.1
30°	452.8	433.7	396.2	371.8	363.4	365.0	364.9	106.8	513.9
35°	393.4	374.1	335.3	295.7	285.6	295.2	300.5	101.3	615.2
40°	313.5	300.8	276.8	238.3	224.4	239.2	248.1	91.6	706.8
45°	227.2	217.7	208.5	191.4	176.2	187.2	194.9	77.0	783.8
50°	165.8	151.3	143.3	147.8	138.9	142.4	144.5	61.5	845.3
55°	119.7	105.2	93.7	108.9	109.4	104.2	103.2	47.4	892.7
60°	84.3	73.0	63.0	78.5	83.8	75.4	76.1	35.9	928.6
65°	60.6	51.5	43.5	55.3	61.5	55.5	56.9	27.0	955.6
70°	44.8	36.9	29.5	37.3	40.5	40.0	42.0	19.5	975.1
75°	31.9	25.4	19.2	23.6	27.6	27.0	29.3	13.5	988.6
80°	20.2	15.5	11.1	12.8	15.3	15.6	17.2	8.0	996.7
85°	9.4	7.2	4.9	5.0	5.8	6.0	6.3	3.3	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE12DN4FXM EAN: 4058352889589	LP number 59446_28
---------------------------------------	--	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	23.7	25.2	24.1	25.5	25.8	23.3	24.8	23.7	25.1	25.4
	3H	24.4	25.7	24.8	26.0	26.4	24.1	25.4	24.5	25.8	26.1
	4H	24.8	26.0	25.2	26.3	26.7	24.5	25.7	24.9	26.1	26.4
	6H	25.1	26.2	25.5	26.5	26.9	24.8	25.9	25.2	26.3	26.6
	8H	25.3	26.3	25.7	26.6	27.0	24.9	25.9	25.4	26.3	26.7
	12H	25.4	26.3	25.8	26.7	27.1	25.0	25.9	25.4	26.3	26.7
4H	2H	24.0	25.2	24.4	25.6	25.9	23.7	24.9	24.1	25.3	25.6
	3H	24.8	25.8	25.2	26.2	26.6	24.7	25.7	25.1	26.1	26.5
	4H	25.2	26.1	25.6	26.5	26.9	25.2	26.1	25.6	26.5	26.9
	6H	25.6	26.3	26.0	26.8	27.2	25.5	26.3	26.0	26.7	27.2
	8H	25.7	26.4	26.2	26.9	27.4	25.7	26.3	26.1	26.8	27.3
	12H	25.9	26.5	26.4	27.0	27.5	25.7	26.3	26.2	26.8	27.3
8H	4H	25.3	26.0	25.7	26.4	26.9	25.3	26.0	25.7	26.4	26.9
	6H	25.7	26.3	26.2	26.7	27.3	25.7	26.3	26.2	26.8	27.3
	8H	25.9	26.4	26.4	26.9	27.4	25.9	26.4	26.4	26.9	27.4
	12H	26.1	26.5	26.6	27.0	27.6	26.0	26.4	26.5	26.9	27.5
12H	4H	25.3	25.9	25.8	26.4	26.8	25.3	25.9	25.8	26.3	26.8
	6H	25.7	26.2	26.2	26.7	27.2	25.8	26.2	26.3	26.7	27.2
	8H	25.9	26.4	26.5	26.9	27.4	25.9	26.3	26.4	26.8	27.4

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1500 B = 58
------------------------	---	--------------------------------------	----------------------------------


C-planes	γ	0° 180°	15°	30°	45°	60°	75°	90° 270°
			165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°	
Luminance in cd/m²								
45°		55409.9	53079.1	50839.0	46676.1	42966.5	45633.5	47514.6
50°		44481.6	40579.4	38435.2	39631.8	37267.4	38189.8	38746.6
55°		35989.6	31635.1	28170.5	32738.9	32897.3	31318.6	31025.2
60°		29083.8	25162.4	21716.6	27064.1	28885.9	26001.0	26252.1
65°		24713.3	21009.4	17735.9	22564.2	25098.9	22659.2	23221.4
70°		22567.7	18616.6	14850.4	18824.3	20439.4	20139.5	21188.5
75°		21247.7	16905.0	12798.9	15730.6	18381.2	17992.9	19524.4
80°		20083.2	15422.6	11039.0	12700.1	15161.5	15472.2	17080.7
85°		18621.0	14239.3	9608.2	9960.4	11495.5	11833.8	12460.8

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE12DN4FXM EAN: 4058352889589	LP number 59446_28
--	--	-------------------------------------

Luminance values in cd/m²

γ 65°
γ 70°
γ 75°
γ 80°
γ 85°

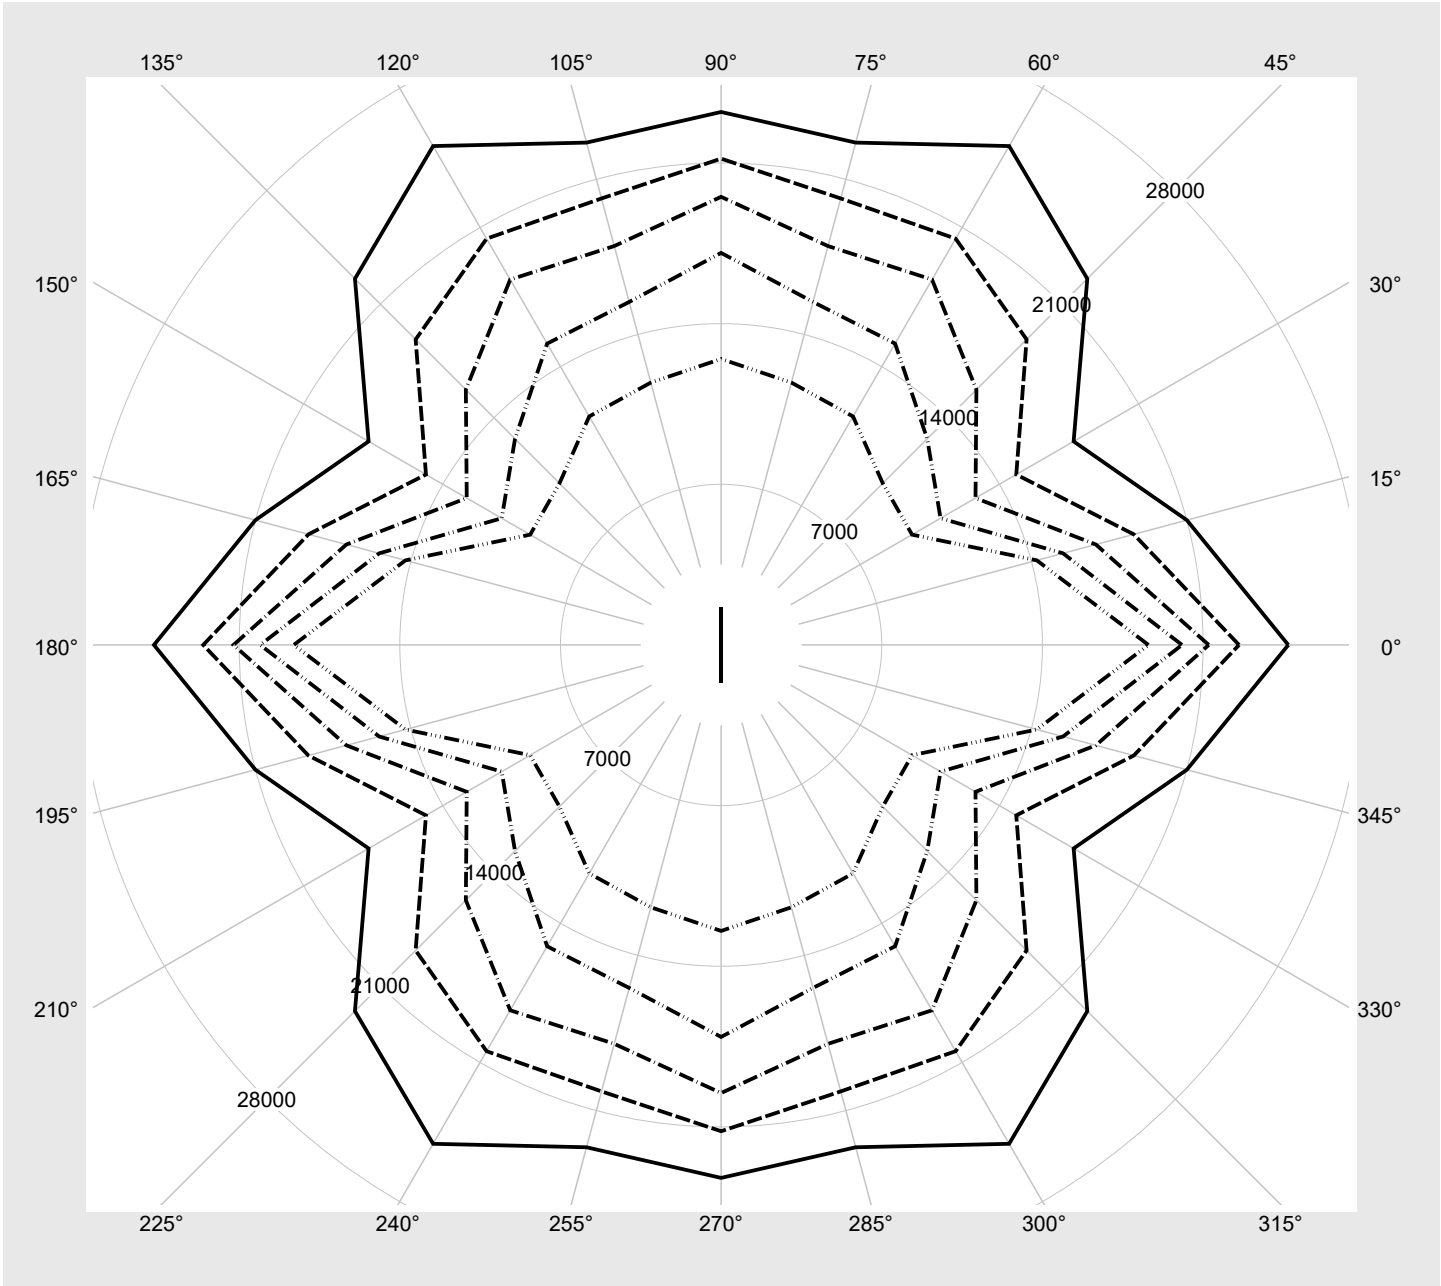

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE12DN4FXM EAN: 4058352889589	LP number 59446_28
---------------------------------------	--	-------------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	15000	84.6
95	240	252	14247	80.0
90	226	250	13483	75.2
85	213	248	12769	71.0
80	199	245	11989	66.3
75	186	243	11253	62.0
70	173	240	10512	57.8
65	160	237	9761	53.6
60	147	234	9006	49.3
55	134	231	8243	45.1
50	122	227	7528	41.2
45	109	223	6751	37.1
40	97	219	6028	33.2
35	84	213	5233	29.1
30	72	208	4497	25.4
25	60	201	3756	21.6
20	48	193	3006	17.8
15	36	182	2255	14.0
10	24	168	1498	10.2
5	12	142	734	6.5
1	4	102	224	4.1