


Photometric test report

Family Licross® 21 Recessed	Order number: 52TE12DV4FXG EAN: 4058352889626	LP number 59101_276
	Version cover frosted, wide distribution, high visual comfort Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-DALI Rated values Net luminous flux = 15420 lm Power consumption = 85.3 W Luminous efficacy = 180.8 lm/W	serial documentation 02.08.2023



Luminous intensity in cd/klm C180-0 C270-90 **Imax: 671 cd/klm**

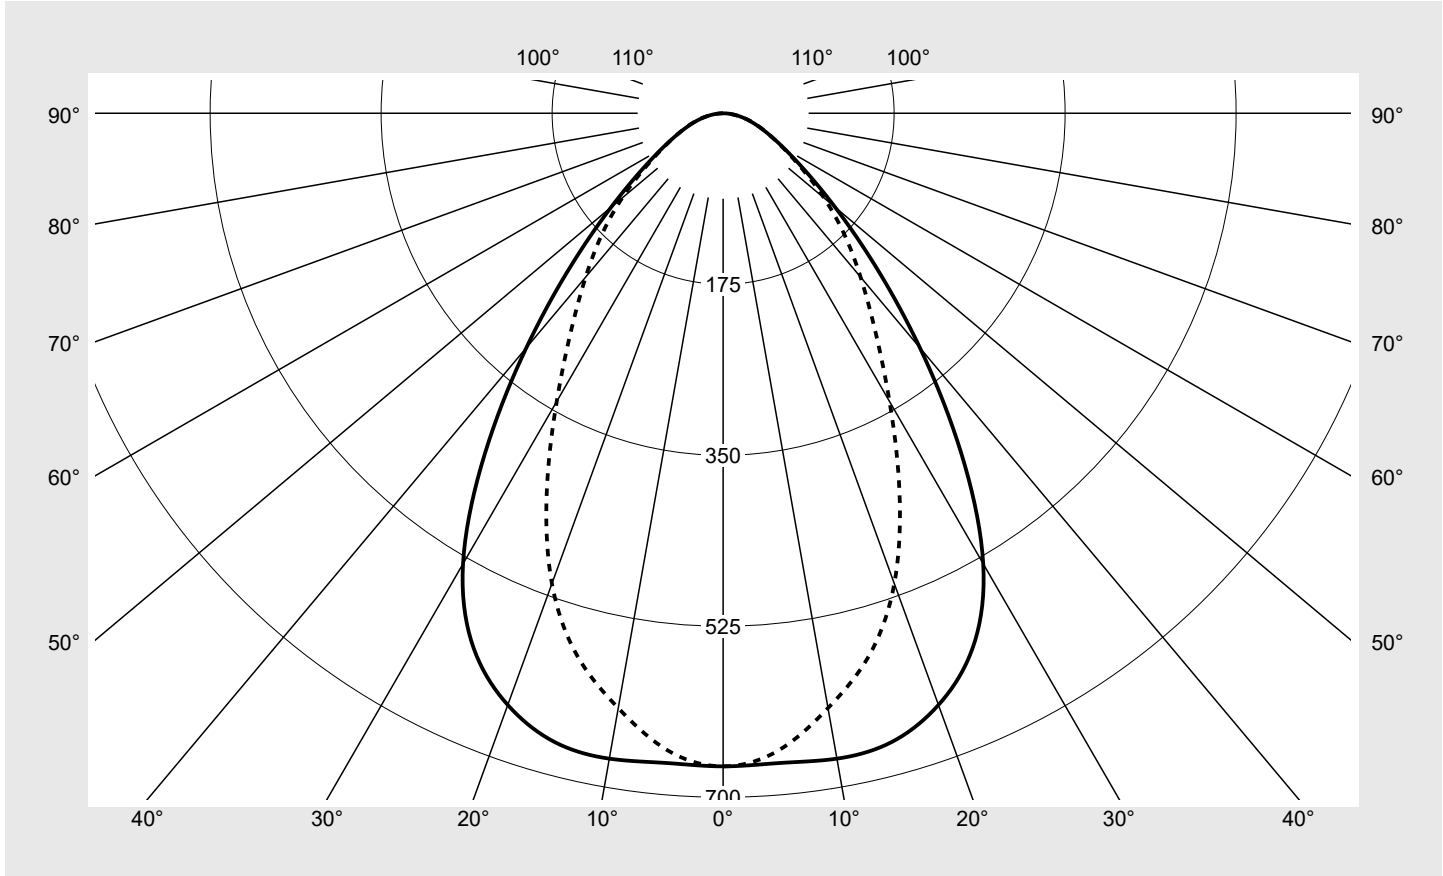

Classifications	
DIN 5040	A 6 0
CIE	N1=72 N2=92 N3=99 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE12DV4FXG EAN: 4058352889626	LP number 59101_276
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	668.4	668.4	668.4	668.4	668.4	668.4	668.4	4.0	4.0
5°	667.5	664.4	657.4	655.8	655.7	654.2	654.4	31.4	35.4
10°	670.7	665.0	649.1	636.1	625.3	618.7	618.1	60.9	96.3
15°	666.2	657.2	632.9	612.0	594.0	578.5	575.5	87.4	183.7
20°	644.4	632.9	606.9	585.4	554.6	522.7	512.3	108.8	292.5
25°	604.1	590.6	566.7	541.2	494.5	444.9	427.0	121.8	414.2
30°	532.4	517.7	496.3	466.1	413.9	359.9	340.6	122.9	537.1
35°	425.0	409.7	387.0	361.9	325.4	286.0	271.1	111.0	648.1
40°	313.4	295.8	270.7	255.1	246.8	229.4	218.8	91.8	739.9
45°	219.2	200.3	175.7	171.1	181.8	184.7	175.5	71.8	811.7
50°	149.7	132.6	112.6	116.3	133.0	145.6	134.9	54.8	866.5
55°	102.7	89.1	74.7	81.5	98.1	107.9	98.1	41.3	907.7
60°	72.4	62.1	51.3	58.3	71.8	76.5	71.0	31.0	938.7
65°	52.1	44.3	35.9	41.6	51.4	54.2	52.1	23.1	961.9
70°	37.6	31.7	24.7	29.1	35.6	38.4	38.3	16.9	978.8
75°	26.0	21.3	16.2	19.0	22.9	25.9	26.8	11.6	990.4
80°	16.1	12.5	9.2	10.4	12.6	14.8	15.7	6.8	997.3
85°	7.0	5.4	3.8	4.1	4.8	5.7	5.8	2.7	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE12DV4FXG EAN: 4058352889626	LP number 59101_276
---------------------------------------	----------------------------------------------------------------	-------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	21.8	23.3	22.2	23.6	23.9	21.8	23.2	22.1	23.5	23.8
	3H	22.4	23.7	22.8	24.0	24.4	22.6	23.8	22.9	24.2	24.5
	4H	22.7	23.9	23.1	24.2	24.6	22.9	24.1	23.3	24.4	24.8
	6H	23.0	24.0	23.4	24.4	24.8	23.2	24.2	23.6	24.6	25.0
	8H	23.1	24.1	23.6	24.5	24.9	23.3	24.3	23.7	24.7	25.1
	12H	23.2	24.1	23.6	24.5	24.9	23.3	24.2	23.8	24.6	25.1
4H	2H	22.0	23.2	22.4	23.5	23.9	22.0	23.2	22.4	23.5	23.9
	3H	22.7	23.7	23.1	24.0	24.5	22.9	23.9	23.4	24.3	24.7
	4H	23.0	23.9	23.5	24.3	24.7	23.4	24.3	23.8	24.7	25.1
	6H	23.3	24.1	23.8	24.5	25.0	23.7	24.5	24.2	24.9	25.4
	8H	23.5	24.2	24.0	24.6	25.1	23.9	24.5	24.3	25.0	25.5
	12H	23.6	24.2	24.1	24.6	25.1	24.0	24.5	24.4	25.0	25.5
8H	4H	23.1	23.8	23.6	24.2	24.7	23.4	24.1	23.9	24.6	25.0
	6H	23.5	24.0	23.9	24.5	25.0	23.9	24.4	24.4	24.9	25.4
	8H	23.6	24.1	24.1	24.6	25.1	24.0	24.5	24.5	25.0	25.5
	12H	23.8	24.2	24.3	24.7	25.2	24.2	24.6	24.7	25.1	25.6
12H	4H	23.1	23.7	23.6	24.2	24.7	23.5	24.0	23.9	24.5	25.0
	6H	23.5	23.9	24.0	24.4	25.0	23.9	24.3	24.4	24.8	25.4
	8H	23.6	24.0	24.2	24.5	25.1	24.1	24.5	24.6	25.0	25.5

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 2250
			B = 58


C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		36632.7	33479.1	29355.8	28597.5	30379.5	30864.3	29331.1	
50°		27516.0	24370.3	20700.8	21380.0	24447.9	26768.3	24789.8	
55°		21149.9	18360.6	15392.5	16794.3	20205.0	22238.1	20199.8	
60°		17105.4	14683.4	12125.2	13788.0	16960.1	18081.2	16773.9	
65°		14567.3	12398.5	10050.8	11637.8	14384.2	15141.3	14553.4	
70°		12981.4	10945.8	8534.7	10037.6	12287.3	13266.8	13233.2	
75°		11869.6	9722.9	7411.0	8664.2	10459.8	11806.1	12231.6	
80°		10947.9	8535.0	6279.3	7107.4	8592.2	10104.2	10711.8	
85°		9494.3	7312.9	5164.0	5568.0	6545.5	7665.4	7914.8	

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE12DV4FXG EAN: 4058352889626	LP number 59101_276
----------------------------------------------	----------------------------------------------------------------	--------------------------------------

Luminance values in cd/m²

γ 65°
γ 70°
γ 75°
γ 80°
γ 85°

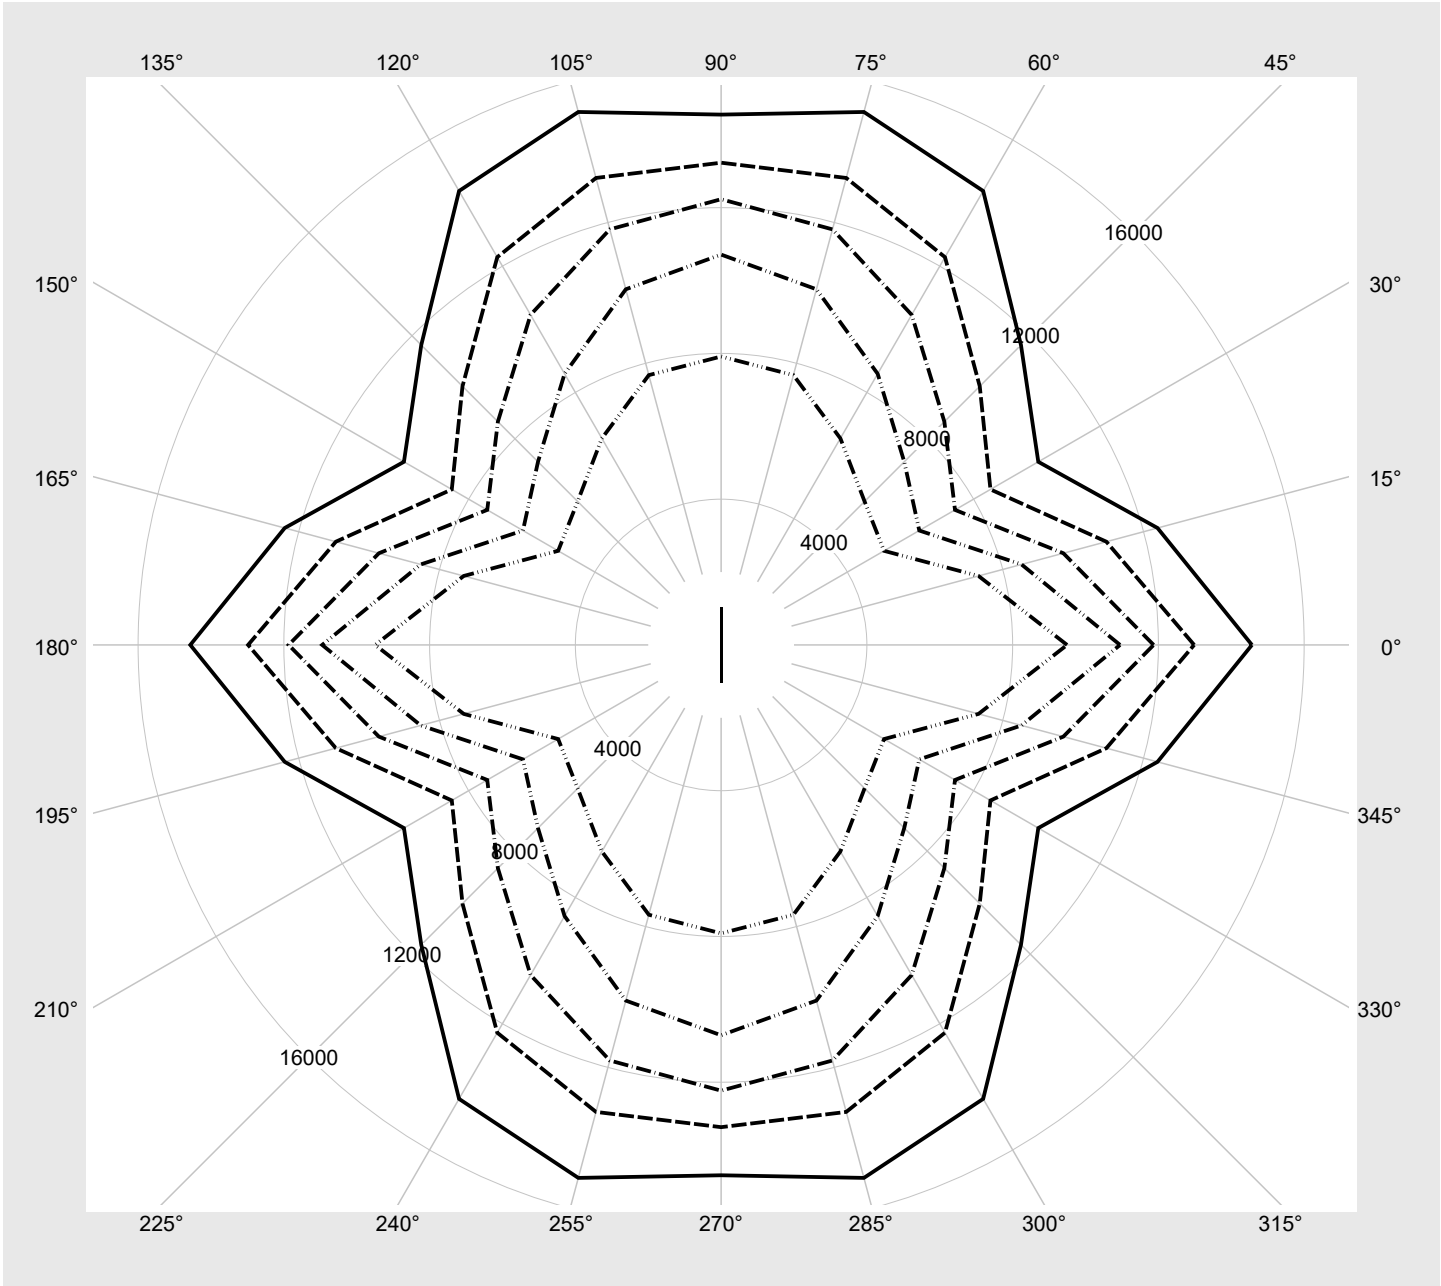

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE12DV4FXG EAN: 4058352889626	LP number 59101_276
---------------------------------------	----------------------------------------------------------------	--------------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	15420	85.3
95	240	252	14644	80.7
90	226	250	13858	76.1
85	213	248	13119	71.7
80	199	245	12316	67.0
75	186	243	11558	62.7
70	173	240	10797	58.3
65	160	237	10030	54.0
60	147	234	9255	49.7
55	134	231	8471	45.4
50	122	227	7739	41.4
45	109	223	6940	37.3
40	97	219	6198	33.4
35	84	213	5386	29.2
30	72	208	4628	25.3
25	60	201	3866	21.5
20	48	193	3098	17.4
15	36	182	2325	13.3
10	24	168	1547	9.0
5	12	142	764	4.4
2	4	102	236	1.4