


# Photometric test report

<b>Family</b> <b>Licross® 21 Recessed</b>	<b>Order number: 52TL10DE45XG</b> <b>EAN: 4058352890301</b>	<b>LP number</b> <b>58684_62</b>
	<b>Version</b> cover frosted <b>Lamps</b> LED 4000 K   CRI ≥ 80 <b>Controlgear</b> ECG-DALI <b>Rated values</b> Net luminous flux = 5000 lm Power consumption = 29.9 W Luminous efficacy = 167.2 lm/W	<b>serial documentation</b> <b>02.08.2023</b>
		

**Luminous intensity in cd/klm** C180-0 C270-90 **Imax: 385 cd/klm**

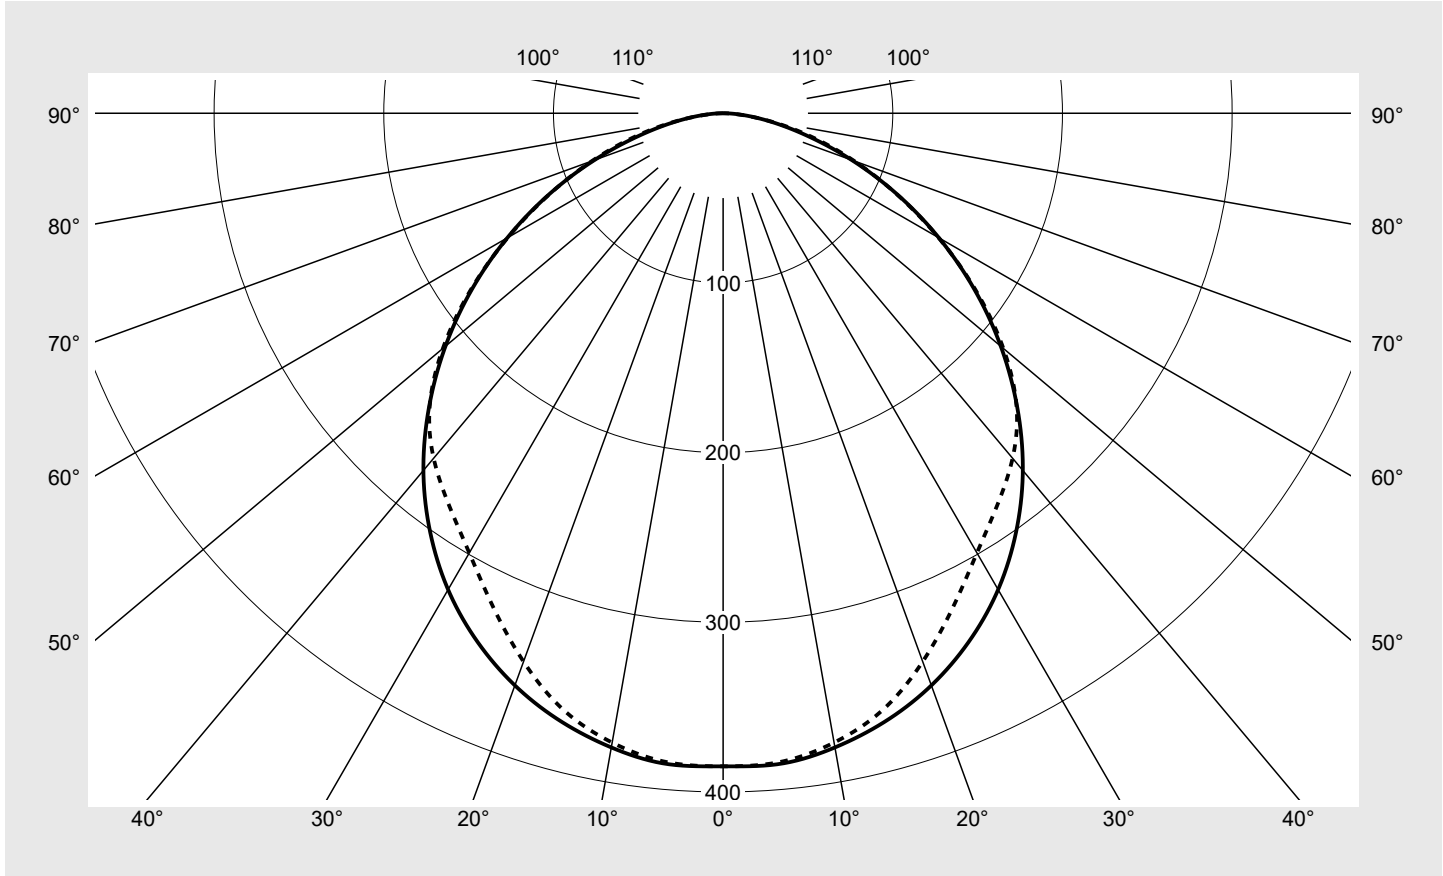

Classifications	
DIN 5040	A 4 0
CIE	N1=50 N2=81 N3=96 N4=100 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	100.0%
$\phi_o$	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

## Photometric test report

Family <b>Licross® 21 Recessed</b>	Order number: <b>52TL10DE45XG</b> EAN: <b>4058352890301</b>	LP number <b>58684_62</b>
---------------------------------------	--	------------------------------

<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>	<b>siteco</b>
---	-----------------------------------	---------------

C-planes $\gamma$	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	384.9	384.9	384.9	384.9	384.9	384.9	384.9	2.3	2.3
5°	384.9	383.5	380.9	382.4	383.7	383.9	383.8	18.3	20.6
10°	379.5	378.4	375.4	376.4	377.1	376.9	376.6	35.9	56.5
15°	370.8	369.9	366.1	365.8	365.5	363.9	363.9	52.0	108.5
20°	358.8	358.1	353.2	350.6	348.2	345.1	343.9	65.8	174.3
25°	343.3	342.7	336.1	331.0	326.3	322.1	320.9	76.8	251.1
30°	324.2	323.3	314.8	307.4	302.4	299.4	299.2	84.9	336.1
35°	301.1	299.6	289.7	281.8	279.3	280.0	281.8	90.2	426.3
40°	274.8	272.4	262.0	255.7	258.0	262.5	265.4	92.8	519.1
45°	245.2	241.9	231.9	229.2	235.1	240.6	244.6	92.0	611.1
50°	213.6	209.5	202.3	202.7	208.5	212.2	215.6	87.5	698.5
55°	180.7	176.6	172.5	174.4	178.1	179.3	181.7	79.5	778.0
60°	146.9	143.9	142.8	145.1	146.4	145.5	146.6	68.9	846.9
65°	113.3	112.0	113.5	115.8	115.6	113.0	112.9	56.5	903.4
70°	80.7	81.0	84.0	87.4	86.4	83.3	82.2	43.2	946.6
75°	51.4	52.0	55.5	60.1	59.2	56.0	54.4	29.6	976.3
80°	28.6	28.8	31.3	34.2	34.2	31.5	29.9	17.0	993.3
85°	11.6	11.6	12.6	13.6	13.2	11.7	10.4	6.7	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

Family <b>Licross® 21 Recessed</b>	Order number: <b>52TL10DE45XG</b> EAN: <b>4058352890301</b>	LP number <b>58684_62</b>
---------------------------------------	--	------------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	24.7	26.3	25.0	26.6	27.0	24.7	26.4	25.1	26.7	27.0
	3H	26.0	27.5	26.4	27.8	28.2	26.1	27.6	26.5	27.9	28.3
	4H	26.5	27.9	26.9	28.2	28.6	26.6	28.0	27.0	28.3	28.7
	6H	26.8	28.1	27.2	28.4	28.8	26.9	28.2	27.3	28.6	29.0
	8H	26.9	28.1	27.3	28.5	28.9	27.1	28.3	27.5	28.7	29.1
	12H	27.0	28.1	27.4	28.5	28.9	27.1	28.3	27.5	28.6	29.1
4H	2H	25.4	26.8	25.8	27.1	27.5	25.4	26.8	25.8	27.2	27.5
	3H	26.9	28.1	27.3	28.5	28.9	27.0	28.2	27.4	28.6	29.0
	4H	27.5	28.5	27.9	28.9	29.4	27.6	28.7	28.1	29.1	29.5
	6H	27.9	28.8	28.3	29.2	29.7	28.1	29.0	28.5	29.4	29.9
	8H	28.0	28.9	28.5	29.3	29.8	28.2	29.1	28.7	29.5	30.0
	12H	28.1	28.9	28.6	29.3	29.8	28.3	29.0	28.8	29.5	30.0
8H	4H	27.8	28.6	28.3	29.1	29.6	27.9	28.8	28.4	29.2	29.7
	6H	28.3	29.0	28.8	29.5	30.0	28.5	29.2	29.0	29.7	30.2
	8H	28.5	29.1	29.0	29.6	30.1	28.7	29.3	29.2	29.8	30.3
	12H	28.6	29.1	29.1	29.6	30.2	28.8	29.3	29.3	29.8	30.4
12H	4H	27.8	28.6	28.3	29.1	29.5	28.0	28.7	28.4	29.2	29.7
	6H	28.4	29.0	28.9	29.5	30.0	28.6	29.2	29.1	29.7	30.2
	8H	28.6	29.1	29.1	29.6	30.1	28.8	29.3	29.3	29.8	30.3


<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm:</b>	<b>L = 750</b> <b>B = 58</b>
------------------------	---	--------------------------------------	---------------------------------

C-planes	$\gamma$	Luminance in cd/m <sup>2</sup>						
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
45°		39854.5	39315.8	37694.2	37250.4	38215.0	39114.7	39759.7
50°		38204.1	37468.4	36172.9	36238.0	37279.6	37943.7	38555.7
55°		36203.8	35386.6	34576.8	34941.5	35685.8	35926.4	36408.2
60°		33764.1	33086.0	32834.9	33362.3	33646.9	33437.5	33697.0
65°		30816.1	30469.6	30855.8	31489.5	31430.2	30737.0	30717.1
70°		27136.6	27222.3	28224.5	29362.4	29028.7	27978.8	27636.0
75°		22827.8	23080.1	24653.5	26710.2	26288.3	24873.4	24169.9
80°		18904.0	19084.7	20730.9	22656.5	22644.5	20856.0	19791.0
85°		15316.7	15283.8	16551.2	17976.8	17368.8	15494.8	13742.1

**Photometric test report**

<b>Family</b> Licross® 21 Recessed	<b>Order number: 52TL10DE45XG</b> <b>EAN: 4058352890301</b>	<b>LP number</b> 58684_62
---------------------------------------	--	------------------------------

**Luminance values in cd/m<sup>2</sup>**     γ 65°   γ 70°   γ 75°   γ 80°   γ 85°     **siteco**

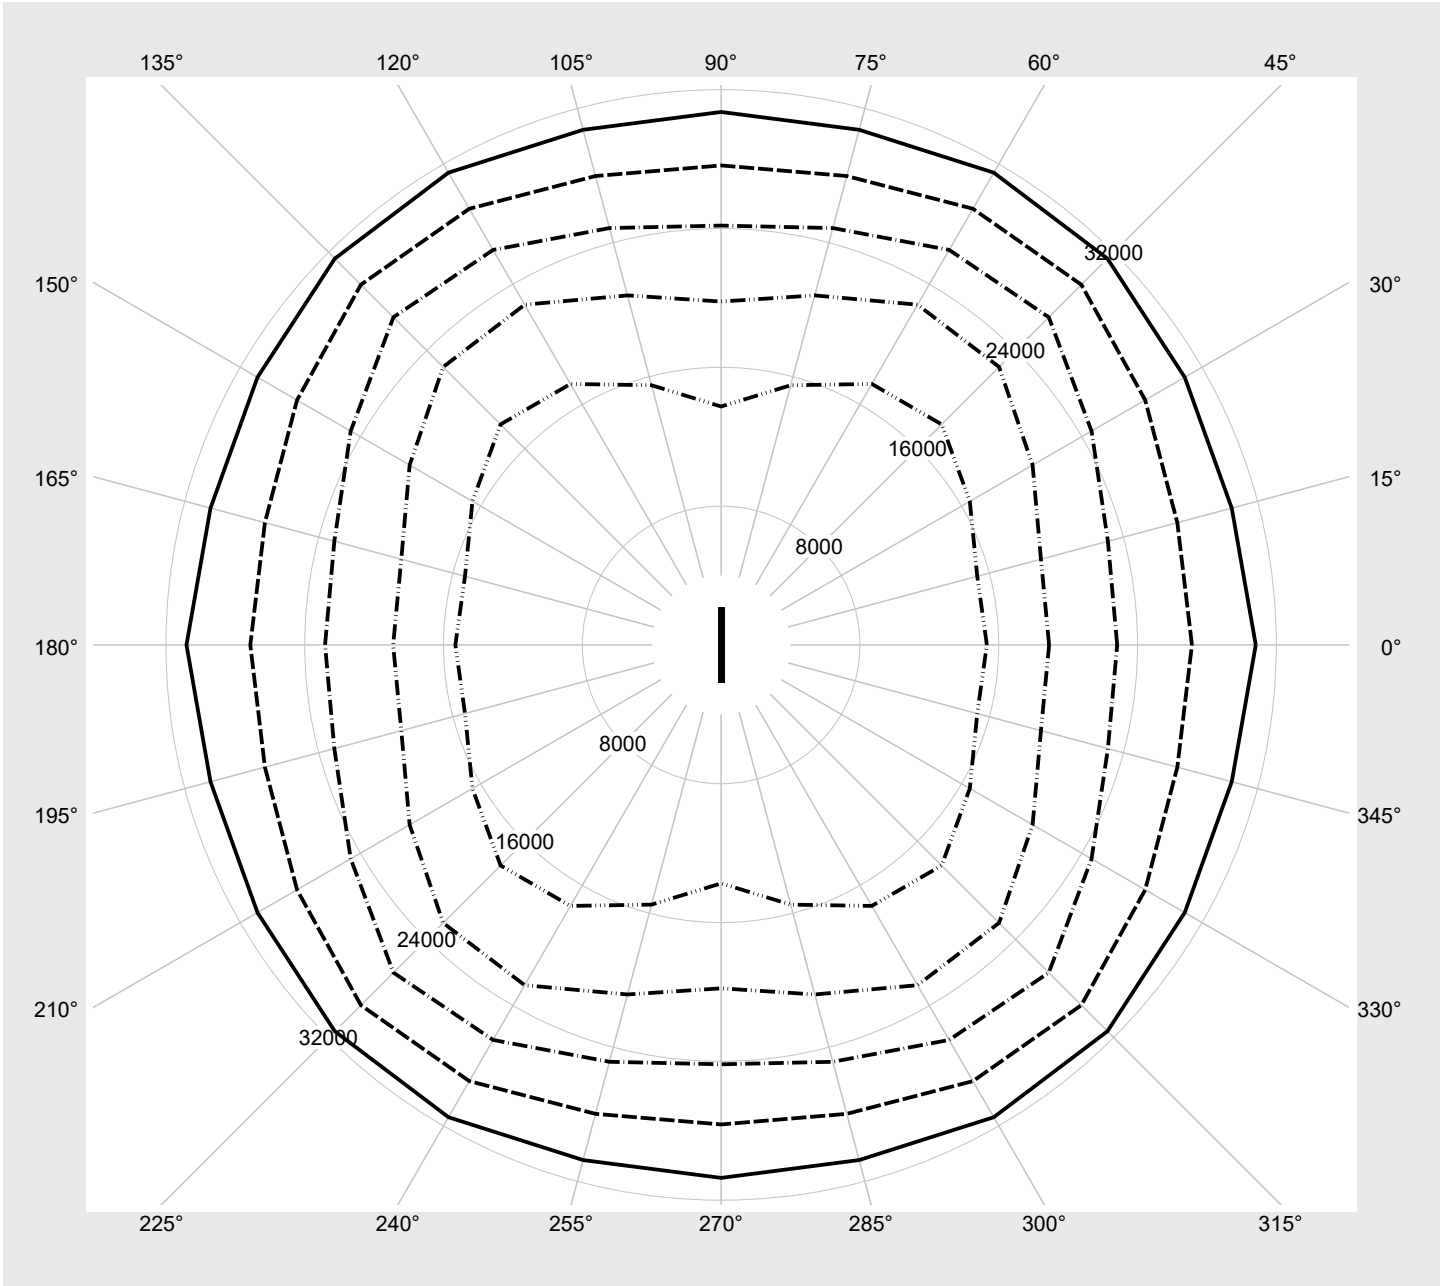

## Photometric test report

<b>Family</b> Licross® 21 Recessed	<b>Order number: 52TL10DE45XG</b> <b>EAN: 4058352890301</b>	<b>LP number</b> <b>58684_62</b>
---------------------------------------	--	-------------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	5000	29.9
95	240	252	4748	28.3
90	226	250	4493	26.7
85	213	248	4253	25.2
80	199	245	3993	23.6
75	186	243	3748	22.1
70	173	240	3501	20.6
65	160	237	3252	19.1
60	147	234	3001	17.6
55	134	231	2746	16.0
50	122	227	2509	14.8
45	109	223	2250	13.4
40	97	219	2009	12.2
35	84	213	1746	10.8
30	72	208	1500	9.4
25	60	201	1253	8.0
20	48	193	1005	6.6
17	40	186	837	5.6