
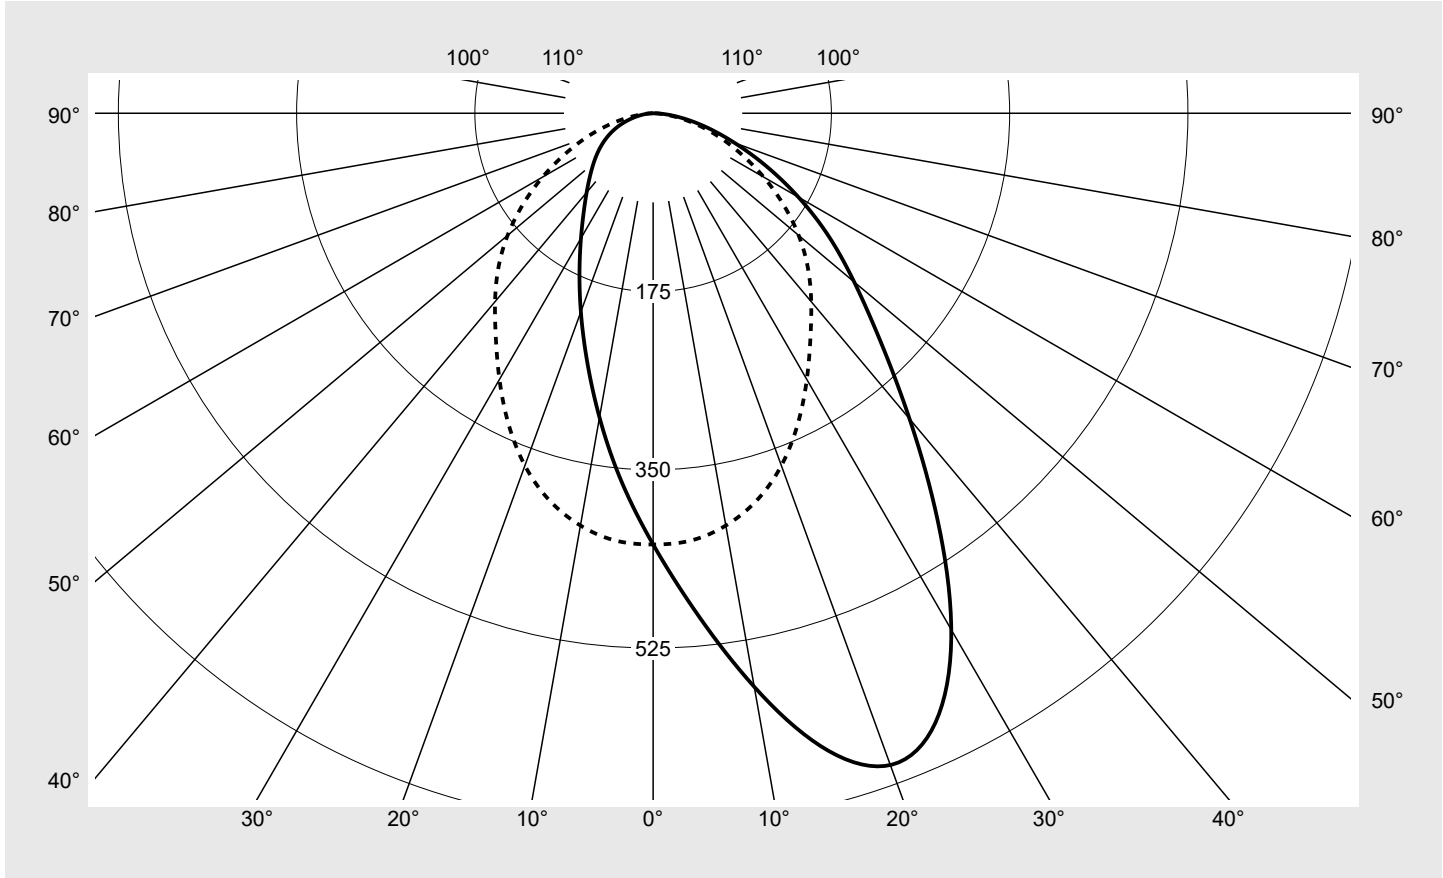


Photometric test report

| | | |
|----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Family Licross® 21 Recessed | Order number: 52TL14DV4EXG EAN: 4058352891223 | LP number 58683_275 |
|  | Version cover frosted, asymmetric distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-DALI Rated values Net luminous flux = 14200 lm Power consumption = 85.3 W Luminous efficacy = 166.5 lm/W | serial documentation 02.08.2023 |
| | |  |

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 681 cd/klm**



| Classifications | |
|-----------------|------------------------------------|
| DIN 5040 | A 4 0 |
| CIE | N1=56 N2=84 N3=97 N4=100 N5=100 |

| Luminaire light output ratios | |
|-------------------------------|--------|
| η_{LB} | 100.0% |
| ϕ_u | 100.0% |
| ϕ_o | 0.0% |

| Measurement conditions |
|---------------------------|
| DIN EN 13032 and DIN 5032 |

Photometric test report

| | | |
|----------------------------------------------|----------------------------------------------------------------|--------------------------------------|
| Family Licross® 21 Recessed | Order number: 52TL14DV4EXG EAN: 4058352891223 | LP number 58683_275 |
|----------------------------------------------|----------------------------------------------------------------|--------------------------------------|

| | | |
|-------------------------------------------------|-----------------------------------|---------------|
| Table of values for luminous intensities | Maximum luminous intensity | siteco |
|-------------------------------------------------|-----------------------------------|---------------|

| C-planes | 0° | 15° 345° | 30° 330° | 45° 315° | 60° 300° | 75° 285° | 90° 270° |
|----------|------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|
| γ | Luminous intensity in cd/klm | | | | | | |
| 0° | 423.3 | 423.3 | 423.3 | 423.3 | 423.3 | 423.3 | 423.3 |
| 5° | 492.9 | 491.4 | 480.7 | 469.8 | 456.1 | 438.7 | 421.2 |
| 10° | 571.7 | 566.6 | 544.9 | 518.0 | 484.6 | 447.0 | 411.0 |
| 15° | 644.7 | 637.1 | 605.9 | 562.5 | 507.2 | 447.4 | 393.4 |
| 20° | 680.9 | 674.8 | 644.8 | 594.0 | 519.7 | 438.2 | 368.1 |
| 25° | 657.9 | 657.6 | 642.1 | 600.0 | 518.2 | 419.3 | 336.2 |
| 30° | 585.4 | 591.2 | 594.0 | 574.0 | 501.7 | 394.4 | 301.7 |
| 35° | 486.6 | 496.5 | 513.6 | 518.9 | 472.6 | 367.8 | 269.2 |
| 40° | 391.6 | 400.9 | 423.7 | 447.6 | 435.3 | 342.4 | 241.4 |
| 45° | 315.0 | 320.7 | 340.1 | 373.0 | 389.0 | 312.9 | 214.9 |
| 50° | 257.7 | 259.4 | 273.6 | 305.9 | 334.9 | 275.1 | 186.5 |
| 55° | 210.4 | 209.0 | 219.8 | 247.0 | 276.4 | 230.5 | 156.0 |
| 60° | 164.7 | 163.2 | 172.4 | 194.6 | 218.3 | 183.7 | 125.4 |
| 65° | 122.2 | 121.6 | 130.0 | 147.7 | 165.1 | 139.3 | 96.1 |
| 70° | 85.2 | 85.7 | 92.4 | 106.6 | 118.3 | 100.1 | 70.2 |
| 75° | 55.7 | 56.1 | 61.0 | 71.1 | 77.9 | 65.9 | 46.5 |
| 80° | 31.6 | 31.9 | 35.4 | 40.3 | 43.4 | 36.3 | 25.7 |
| 85° | 13.1 | 12.9 | 14.6 | 16.5 | 16.2 | 13.2 | 9.1 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |

| C-planes | 105° 255° | 120° 240° | 135° 225° | 150° 210° | 165° 195° | 180° | Phi-zone | Total Phi-zone |
|----------|------------------------------|--------------|--------------|--------------|--------------|-------|-------------------------|-------------------|
| γ | Luminous intensity in cd/klm | | | | | | Luminous flux in lm/klm | |
| 0° | 423.3 | 423.3 | 423.3 | 423.3 | 423.3 | 423.3 | 2.5 | 2.5 |
| 5° | 404.2 | 389.5 | 375.7 | 365.6 | 362.1 | 361.8 | 20.2 | 22.8 |
| 10° | 378.5 | 351.6 | 328.9 | 312.6 | 305.3 | 303.2 | 40.3 | 63.1 |
| 15° | 347.6 | 311.7 | 283.3 | 263.5 | 254.2 | 251.1 | 59.8 | 123.0 |
| 20° | 312.8 | 271.7 | 241.2 | 220.7 | 211.0 | 207.4 | 77.2 | 200.1 |
| 25° | 275.0 | 232.7 | 202.9 | 183.7 | 174.4 | 171.0 | 89.9 | 290.0 |
| 30° | 237.7 | 196.9 | 169.7 | 152.6 | 144.6 | 141.7 | 96.4 | 386.5 |
| 35° | 204.1 | 165.0 | 141.0 | 127.0 | 121.0 | 118.9 | 96.9 | 483.4 |
| 40° | 176.0 | 138.8 | 117.2 | 106.8 | 102.8 | 101.6 | 93.4 | 576.7 |
| 45° | 151.3 | 116.9 | 98.0 | 90.5 | 88.3 | 87.8 | 87.1 | 663.9 |
| 50° | 128.6 | 98.3 | 82.7 | 77.4 | 76.2 | 76.3 | 79.3 | 743.1 |
| 55° | 107.1 | 82.4 | 69.7 | 65.9 | 65.5 | 66.0 | 69.9 | 813.0 |
| 60° | 87.0 | 68.0 | 58.3 | 55.3 | 55.4 | 56.0 | 59.0 | 872.0 |
| 65° | 68.6 | 55.0 | 47.7 | 45.3 | 45.4 | 45.9 | 47.4 | 919.5 |
| 70° | 51.6 | 42.4 | 37.2 | 35.1 | 35.2 | 35.4 | 35.8 | 955.3 |
| 75° | 35.3 | 29.8 | 26.5 | 24.5 | 24.4 | 24.5 | 24.7 | 980.0 |
| 80° | 20.2 | 17.6 | 15.6 | 14.5 | 14.4 | 14.5 | 14.3 | 994.3 |
| 85° | 7.8 | 7.1 | 6.7 | 6.2 | 6.2 | 6.3 | 5.7 | 1000.0 |
| 90° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |
| 180° | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 1000.0 |

Photometric test report

| | | |
|---------------------------------------|----------------------------------------------------------------|-------------------------------|
| Family Licross® 21 Recessed | Order number: 52TL14DV4EXG EAN: 4058352891223 | LP number 58683_275 |
|---------------------------------------|----------------------------------------------------------------|-------------------------------|

| | | |
|------------------|----------------------|---------------|
| UGR-Table | Standard room | siteco |
|------------------|----------------------|---------------|

| | | | | | | | | | | | |
|------------------------------|---------------------|------|------|------|------|--------------------|------|------|------|------|------|
| Reflection factor of ceiling | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | 0.7 | 0.7 | 0.5 | 0.5 | 0.3 | |
| Reflection factor of walls | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | 0.5 | 0.3 | 0.5 | 0.3 | 0.3 | |
| Reflection factor of floor | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | |
| Room dimensions | View crosswise (C0) | | | | | View endwise (C90) | | | | | |
| x | y | | | | | | | | | | |
| 2H | 2H | 26.2 | 27.8 | 26.6 | 28.1 | 28.4 | 24.8 | 26.4 | 25.2 | 26.7 | 27.0 |
| | 3H | 27.2 | 28.6 | 27.5 | 28.9 | 29.3 | 25.9 | 27.4 | 26.3 | 27.7 | 28.1 |
| | 4H | 27.5 | 28.9 | 27.9 | 29.2 | 29.6 | 26.3 | 27.7 | 26.7 | 28.0 | 28.4 |
| | 6H | 27.8 | 29.0 | 28.2 | 29.4 | 29.8 | 26.6 | 27.8 | 27.0 | 28.2 | 28.6 |
| | 8H | 27.9 | 29.1 | 28.3 | 29.4 | 29.8 | 26.7 | 27.9 | 27.1 | 28.2 | 28.6 |
| | 12H | 28.0 | 29.0 | 28.4 | 29.4 | 29.9 | 26.8 | 27.8 | 27.2 | 28.2 | 28.6 |
| 4H | 2H | 27.0 | 28.3 | 27.3 | 28.6 | 29.0 | 25.4 | 26.8 | 25.8 | 27.1 | 27.5 |
| | 3H | 28.1 | 29.2 | 28.5 | 29.6 | 30.0 | 26.8 | 28.0 | 27.2 | 28.3 | 28.8 |
| | 4H | 28.5 | 29.5 | 29.0 | 30.0 | 30.4 | 27.4 | 28.4 | 27.8 | 28.8 | 29.2 |
| | 6H | 28.9 | 29.7 | 29.3 | 30.2 | 30.6 | 27.7 | 28.6 | 28.2 | 29.1 | 29.5 |
| | 8H | 29.0 | 29.8 | 29.4 | 30.2 | 30.7 | 27.9 | 28.7 | 28.3 | 29.1 | 29.6 |
| | 12H | 29.1 | 29.8 | 29.5 | 30.2 | 30.7 | 27.9 | 28.6 | 28.4 | 29.1 | 29.6 |
| 8H | 4H | 28.9 | 29.7 | 29.3 | 30.1 | 30.6 | 27.6 | 28.4 | 28.1 | 28.9 | 29.3 |
| | 6H | 29.3 | 30.0 | 29.8 | 30.4 | 30.9 | 28.1 | 28.8 | 28.6 | 29.3 | 29.8 |
| | 8H | 29.4 | 30.0 | 29.9 | 30.5 | 31.0 | 28.3 | 28.9 | 28.8 | 29.4 | 29.9 |
| | 12H | 29.6 | 30.1 | 30.1 | 30.6 | 31.1 | 28.4 | 28.9 | 28.9 | 29.4 | 29.9 |
| 12H | 4H | 28.9 | 29.6 | 29.4 | 30.1 | 30.6 | 27.6 | 28.4 | 28.1 | 28.8 | 29.3 |
| | 6H | 29.4 | 29.9 | 29.9 | 30.4 | 30.9 | 28.2 | 28.7 | 28.7 | 29.2 | 29.8 |
| | 8H | 29.6 | 30.0 | 30.1 | 30.5 | 31.1 | 28.4 | 28.9 | 28.9 | 29.4 | 29.9 |


| | | | |
|------------------------|---------------------------------------------------|--------------------------------------|-----------------|
| Luminance table | Max. for $\gamma \geq 65^\circ$ | Photometric dimensions in mm: | L = 2250 |
| | | | B = 58 |

| C-planes | 0° | 15° 345° | 30° 330° | 45° 315° | 60° 300° | 75° 285° | 90° 270° | 105° 255° | 120° 240° | 135° 225° | 150° 210° | 165° 195° | 180° |
|----------|--------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------|--------------|--------------|--------------|--------------|---------|
| γ | Luminance in cd/m ² | | | | | | | | | | | | |
| 45° | 48467.7 | 49343.6 | 52341.1 | 57402.0 | 59854.6 | 48156.2 | 33070.9 | 23289.7 | 17985.6 | 15073.7 | 13931.1 | 13591.3 | 13504.7 |
| 50° | 43617.5 | 43906.6 | 46315.5 | 51775.7 | 56700.6 | 46561.8 | 31572.9 | 21776.6 | 16647.2 | 13993.2 | 13095.0 | 12905.4 | 12918.2 |
| 55° | 39905.9 | 39654.0 | 41693.7 | 46853.0 | 52444.1 | 43721.5 | 29587.5 | 20325.0 | 15627.6 | 13222.1 | 12506.9 | 12427.8 | 12528.5 |
| 60° | 35840.8 | 35524.4 | 37520.0 | 42351.0 | 47512.4 | 39970.0 | 27279.9 | 18926.6 | 14793.2 | 12679.2 | 12044.6 | 12048.8 | 12194.8 |
| 65° | 31460.5 | 31297.8 | 33463.3 | 38022.9 | 42501.1 | 35857.3 | 24748.4 | 17660.0 | 14172.0 | 12274.7 | 11669.1 | 11686.9 | 11828.8 |
| 70° | 27099.3 | 27278.5 | 29403.3 | 33924.5 | 37626.8 | 31852.1 | 22332.6 | 16410.9 | 13483.3 | 11845.5 | 11151.3 | 11195.5 | 11247.7 |
| 75° | 23425.3 | 23585.0 | 25629.5 | 29884.2 | 32747.6 | 27714.4 | 19567.1 | 14845.0 | 12547.8 | 11122.6 | 10282.2 | 10258.2 | 10284.7 |
| 80° | 19831.4 | 20005.6 | 22165.6 | 25273.0 | 27167.3 | 22740.2 | 16121.8 | 12666.0 | 11033.6 | 9765.3 | 9111.1 | 9047.8 | 9099.2 |
| 85° | 16345.1 | 16162.8 | 18176.6 | 20553.7 | 20206.7 | 16447.5 | 11402.4 | 9751.9 | 8899.2 | 8306.1 | 7801.8 | 7761.8 | 7833.0 |

Photometric test report

| | | |
|----------------------------------------------|----------------------------------------------------------------|--------------------------------------|
| Family Licross® 21 Recessed | Order number: 52TL14DV4EXG EAN: 4058352891223 | LP number 58683_275 |
|----------------------------------------------|----------------------------------------------------------------|--------------------------------------|

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

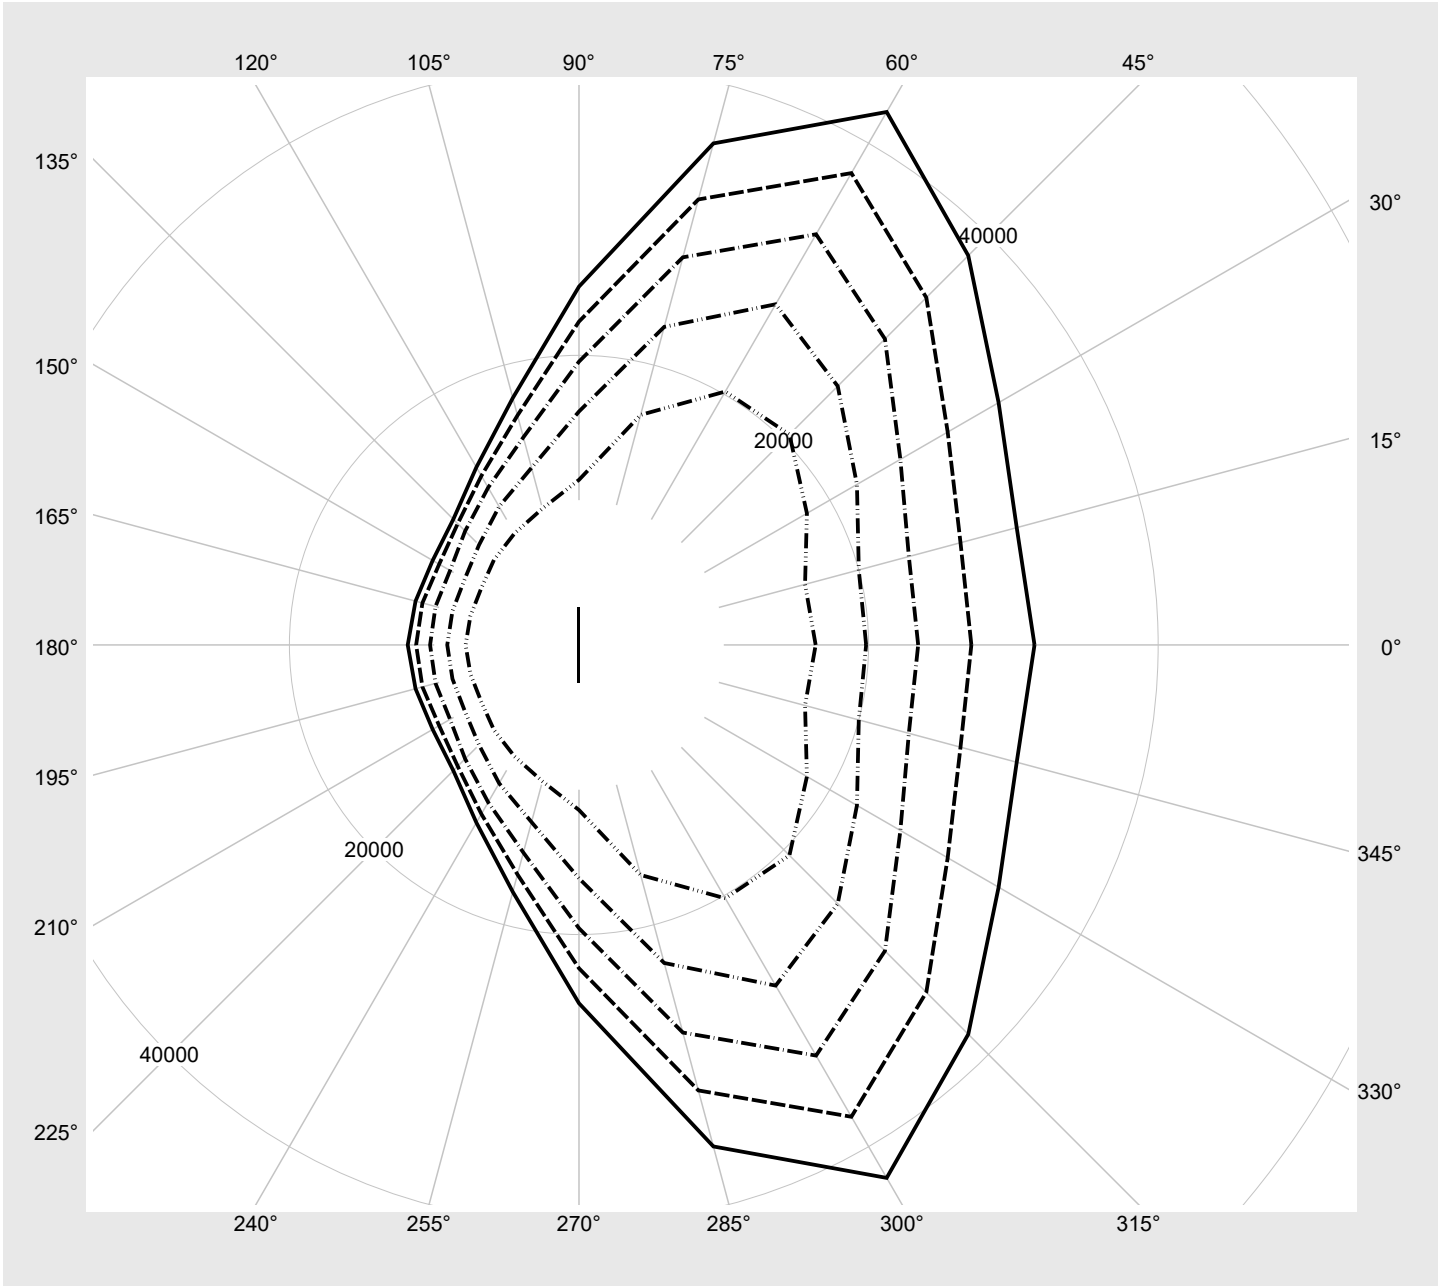

Photometric test report

| | | |
|---------------------------------------|----------------------------------------------------------------|-------------------------------|
| Family Licross® 21 Recessed | Order number: 52TL14DV4EXG EAN: 4058352891223 | LP number 58683_275 |
|---------------------------------------|----------------------------------------------------------------|-------------------------------|

| | | |
|-----------------------------|---------------------------------|---------------|
| Dimming levels table | environmental temperature: 25°C | sITeco |
|-----------------------------|---------------------------------|---------------|

| Luminous flux % | Dimming level linear | Dimming level logarithmic | Luminous flux [lm] | Power consumption [W] |
|-----------------|----------------------|---------------------------|--------------------|-----------------------|
| 100 | 254 | 254 | 14200 | 85.3 |
| 95 | 240 | 252 | 13486 | 80.7 |
| 90 | 226 | 250 | 12762 | 76.1 |
| 85 | 213 | 248 | 12081 | 71.7 |
| 80 | 199 | 245 | 11342 | 67.0 |
| 75 | 186 | 243 | 10644 | 62.7 |
| 70 | 173 | 240 | 9943 | 58.3 |
| 65 | 160 | 237 | 9237 | 54.0 |
| 60 | 147 | 234 | 8523 | 49.7 |
| 55 | 134 | 231 | 7801 | 45.4 |
| 50 | 122 | 227 | 7127 | 41.4 |
| 45 | 109 | 223 | 6391 | 37.3 |
| 40 | 97 | 219 | 5708 | 33.4 |
| 35 | 84 | 213 | 4960 | 29.2 |
| 30 | 72 | 208 | 4262 | 25.3 |
| 25 | 60 | 201 | 3560 | 21.5 |
| 20 | 48 | 193 | 2853 | 17.4 |
| 15 | 36 | 182 | 2141 | 13.3 |
| 10 | 24 | 168 | 1425 | 9.0 |
| 5 | 12 | 142 | 703 | 4.4 |
| 2 | 4 | 102 | 217 | 1.4 |