




Photometric test report

Family Licross® 21 Recessed	Order number: 52TL1EDE445G EAN: 4058352891704	LP number 59263_71
	Version cover frosted, elliptical narrow distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-DALI Rated values Net luminous flux = 4970 lm Power consumption = 29.9 W Luminous efficacy = 166.2 lm/W	serial documentation 02.08.2023
		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 1670 cd/klm**

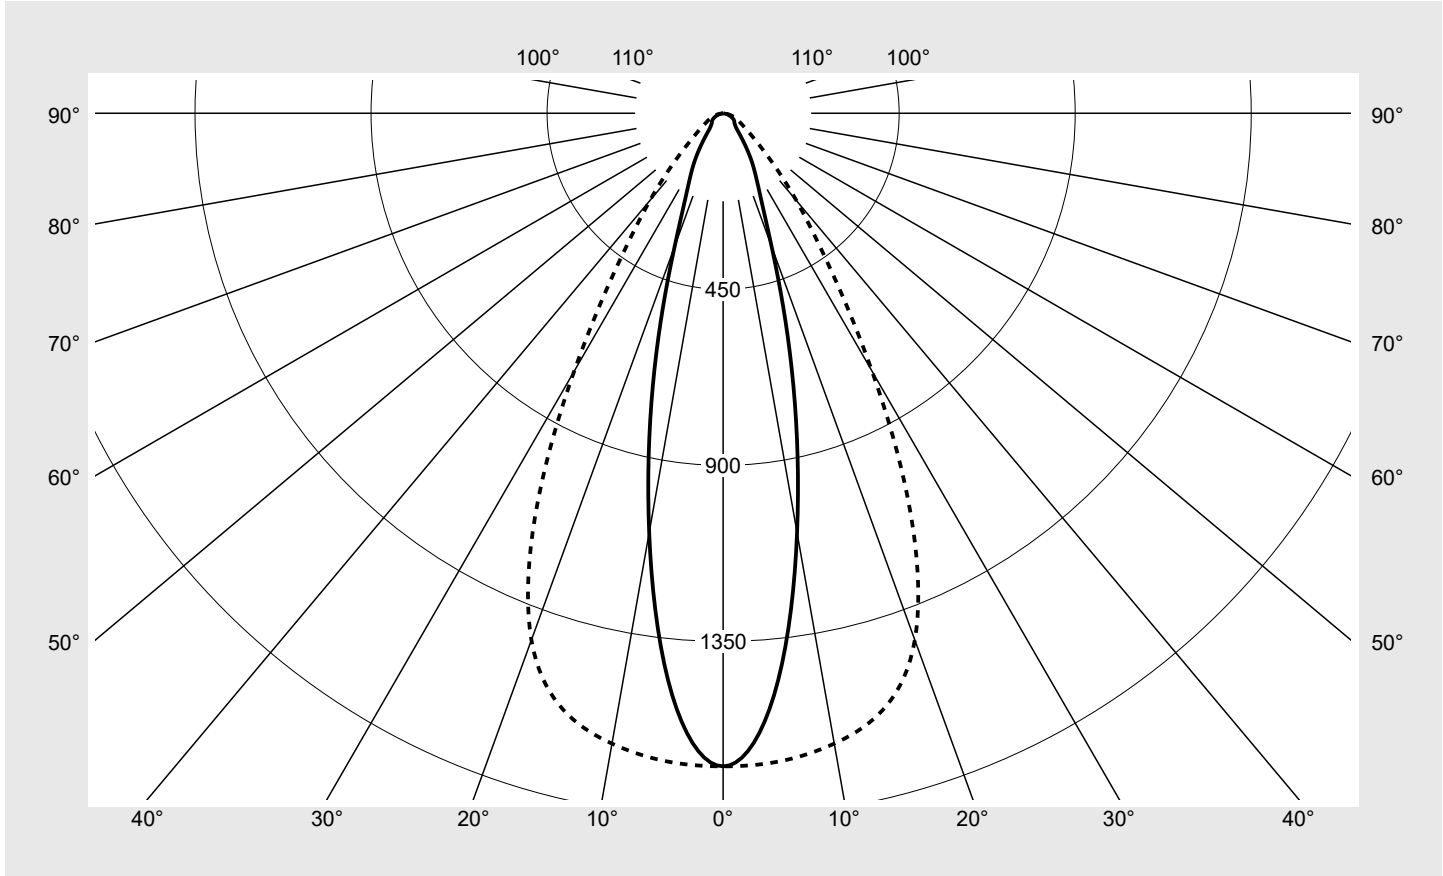

Classifications	
DIN 5040	A 7 0
CIE	N1=85 N2=95 N3=99 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Recessed	Order number: 52TL1EDE445G EAN: 4058352891704	LP number 59263_71
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	1669.5	1669.5	1669.5	1669.5	1669.5	1669.5	1669.5	10.0	10.0
5°	1493.3	1495.6	1516.6	1565.9	1616.3	1649.8	1662.9	75.0	85.0
10°	1088.5	1106.7	1175.0	1303.4	1460.6	1586.1	1636.2	126.8	211.8
15°	678.3	712.7	825.0	1006.5	1239.9	1474.8	1578.7	151.0	362.9
20°	362.1	388.9	492.0	707.6	980.6	1275.8	1432.9	148.2	511.0
25°	217.8	231.1	285.8	436.7	705.9	972.9	1137.5	127.8	638.8
30°	151.3	158.5	185.3	264.1	455.8	646.3	761.7	99.0	737.8
35°	95.4	107.0	131.3	171.8	268.4	391.1	463.8	70.7	808.5
40°	57.7	64.5	93.9	120.6	157.9	239.7	291.4	50.0	858.5
45°	43.5	45.9	58.2	86.3	99.5	145.4	176.9	35.2	893.7
50°	37.7	39.0	42.8	61.0	68.3	89.3	109.1	26.2	919.9
55°	34.6	35.0	36.7	43.5	50.5	59.6	73.7	20.9	940.8
60°	30.2	31.1	32.8	34.2	38.6	42.0	53.5	17.5	958.3
65°	23.9	25.4	29.1	28.1	30.1	30.8	41.3	14.6	972.8
70°	17.0	18.4	22.5	23.3	23.4	22.7	30.8	11.5	984.3
75°	10.9	12.0	16.2	17.9	17.4	15.7	20.7	8.4	992.7
80°	6.2	6.7	9.0	10.7	11.0	9.3	11.6	5.0	997.7
85°	3.1	3.3	4.2	5.0	4.8	3.9	4.2	2.3	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 21 Recessed	Order number: 52TL1EDE445G EAN: 4058352891704	LP number 59263_71
---------------------------------------	--	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	15.1	16.4	15.5	16.7	17.0	20.1	21.4	20.5	21.7	22.0
	3H	16.3	17.4	16.7	17.7	18.1	20.7	21.8	21.1	22.1	22.5
	4H	16.7	17.7	17.1	18.1	18.4	21.0	22.0	21.4	22.3	22.7
	6H	16.9	17.8	17.3	18.2	18.6	21.2	22.1	21.6	22.4	22.8
	8H	17.1	17.9	17.5	18.3	18.7	21.4	22.1	21.8	22.5	22.9
	12H	17.1	17.9	17.5	18.3	18.7	21.4	22.1	21.8	22.5	22.9
4H	2H	16.0	16.9	16.4	17.3	17.6	20.1	21.2	20.5	21.5	21.9
	3H	17.4	18.2	17.8	18.6	19.0	20.8	21.7	21.3	22.1	22.5
	4H	17.9	18.6	18.3	19.0	19.5	21.2	22.0	21.7	22.4	22.8
	6H	18.2	18.8	18.6	19.3	19.7	21.5	22.1	22.0	22.6	23.0
	8H	18.3	18.9	18.8	19.3	19.8	21.6	22.2	22.1	22.6	23.1
	12H	18.4	18.9	18.9	19.3	19.8	21.7	22.2	22.2	22.6	23.1
8H	4H	18.4	18.9	18.8	19.4	19.8	21.3	21.9	21.8	22.3	22.8
	6H	18.8	19.3	19.3	19.7	20.3	21.7	22.2	22.2	22.6	23.2
	8H	19.0	19.4	19.5	19.9	20.4	21.8	22.3	22.4	22.7	23.3
	12H	19.1	19.4	19.6	19.9	20.5	21.9	22.3	22.5	22.8	23.3
12H	4H	18.4	18.9	18.9	19.3	19.8	21.3	21.8	21.8	22.3	22.8
	6H	18.9	19.3	19.4	19.8	20.3	21.7	22.1	22.2	22.6	23.1
	8H	19.1	19.5	19.6	20.0	20.5	21.9	22.2	22.4	22.7	23.3

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 750 B = 58
------------------------	---	--------------------------------------	---------------------------------


C-planes	γ	Luminance in cd/m ²						
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
45°		7026.9	7412.4	9396.1	13940.6	16082.5	23493.4	28589.6
50°		6708.0	6928.5	7607.0	10848.7	12142.0	15878.0	19398.5
55°		6884.5	6968.0	7314.4	8660.0	10062.7	11877.1	14684.4
60°		6890.8	7117.3	7498.4	7821.1	8818.7	9592.9	12223.2
65°		6468.8	6859.7	7871.6	7599.1	8145.5	8321.0	11169.0
70°		5671.2	6134.2	7509.2	7790.8	7815.5	7572.0	10298.2
75°		4792.7	5301.2	7148.7	7916.3	7687.7	6948.7	9132.9
80°		4049.1	4378.7	5925.6	7011.8	7217.8	6111.1	7645.4
85°		4096.6	4369.2	5559.5	6589.9	6313.3	5104.7	5470.4

Photometric test report

Family Licross® 21 Recessed	Order number: 52TL1EDE445G EAN: 4058352891704	LP number 59263_71
--	--	-------------------------------------

Luminance values in cd/m²

γ 65°
γ 70°
γ 75°
γ 80°
γ 85°

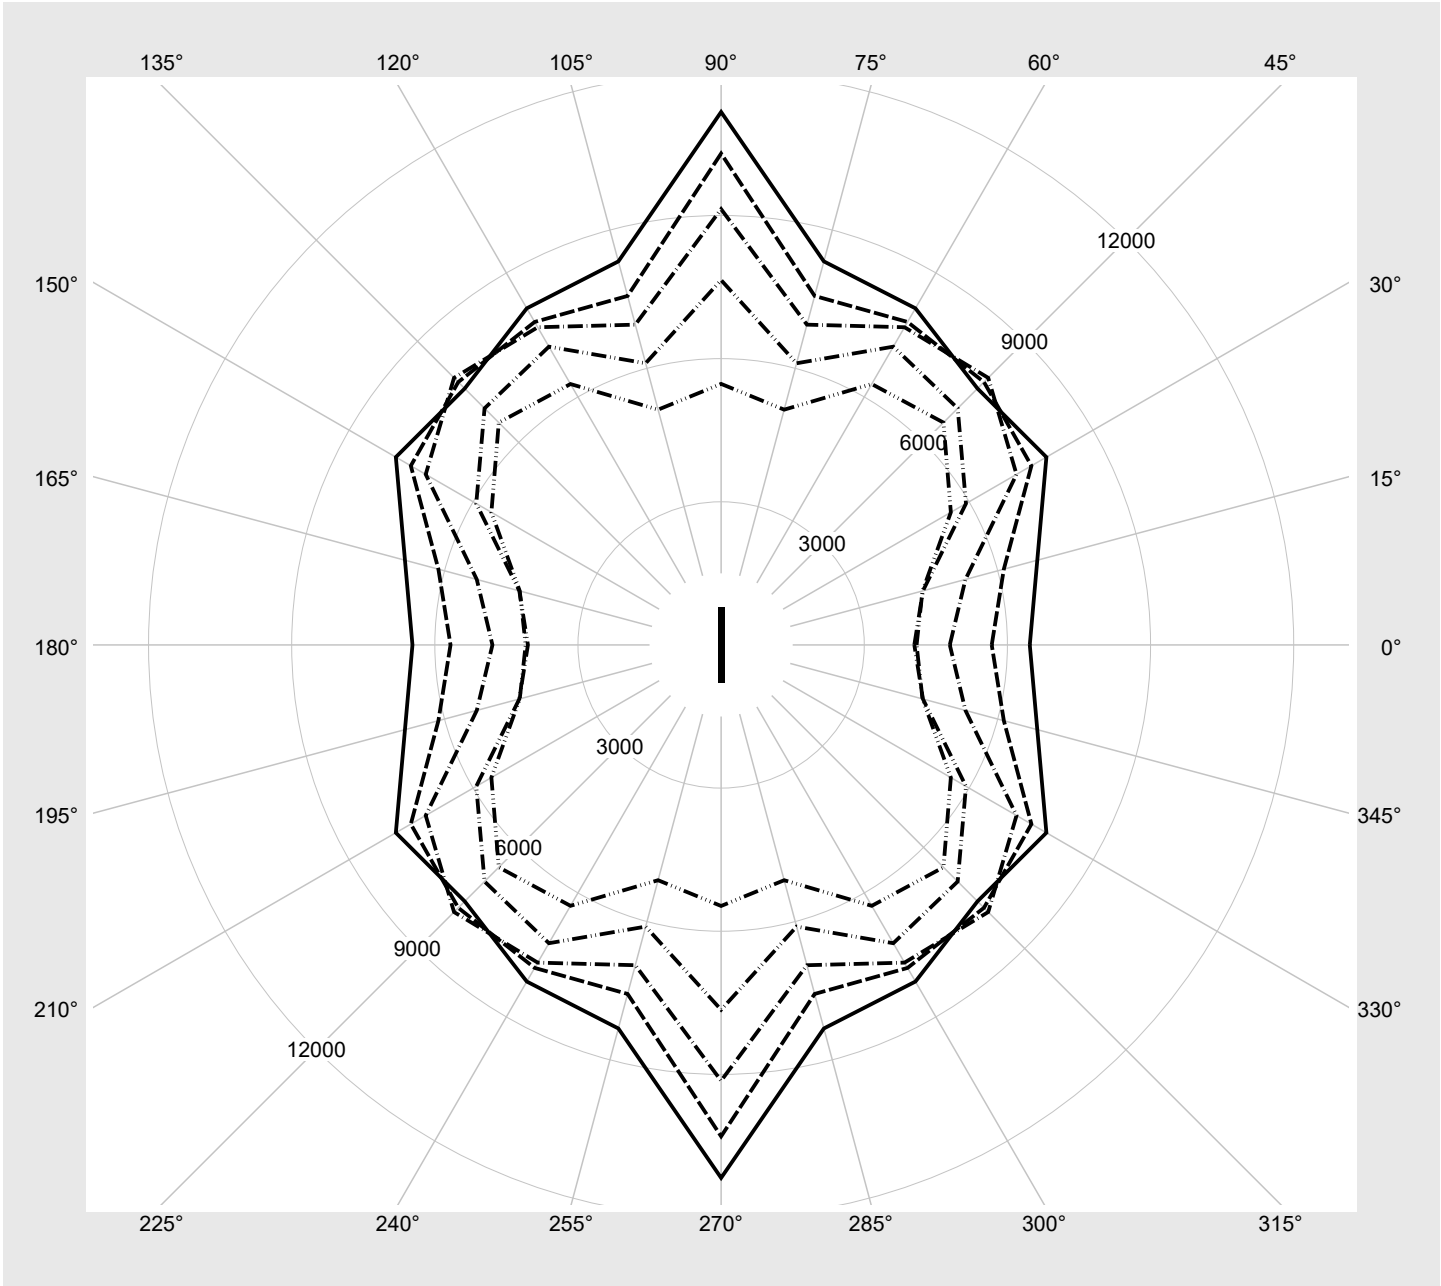

Photometric test report

Family Licross® 21 Recessed	Order number: 52TL1EDE445G EAN: 4058352891704	LP number 59263_71
---------------------------------------	--	-------------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	4970	29.9
95	240	252	4719	28.3
90	226	250	4466	26.7
85	213	248	4228	25.2
80	199	245	3969	23.6
75	186	243	3725	22.1
70	173	240	3480	20.6
65	160	237	3233	19.1
60	147	234	2983	17.6
55	134	231	2730	16.0
50	122	227	2494	14.8
45	109	223	2236	13.4
40	97	219	1997	12.2
35	84	213	1736	10.8
30	72	208	1491	9.4
25	60	201	1245	8.0
20	48	193	999	6.6
17	40	186	832	5.6