


Photometric test report

Family Licross® 21 Recessed	Order number: 52TE14CN485G EAN: 4058352889763	LP number 58683_290
	Version cover frosted, asymmetric distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-Multilumen CLOi Rated values Net luminous flux = 8530 lm Power consumption = 49.9 W Luminous efficacy = 170.9 lm/W	serial documentation 17.08.2023
		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 681 cd/klm**

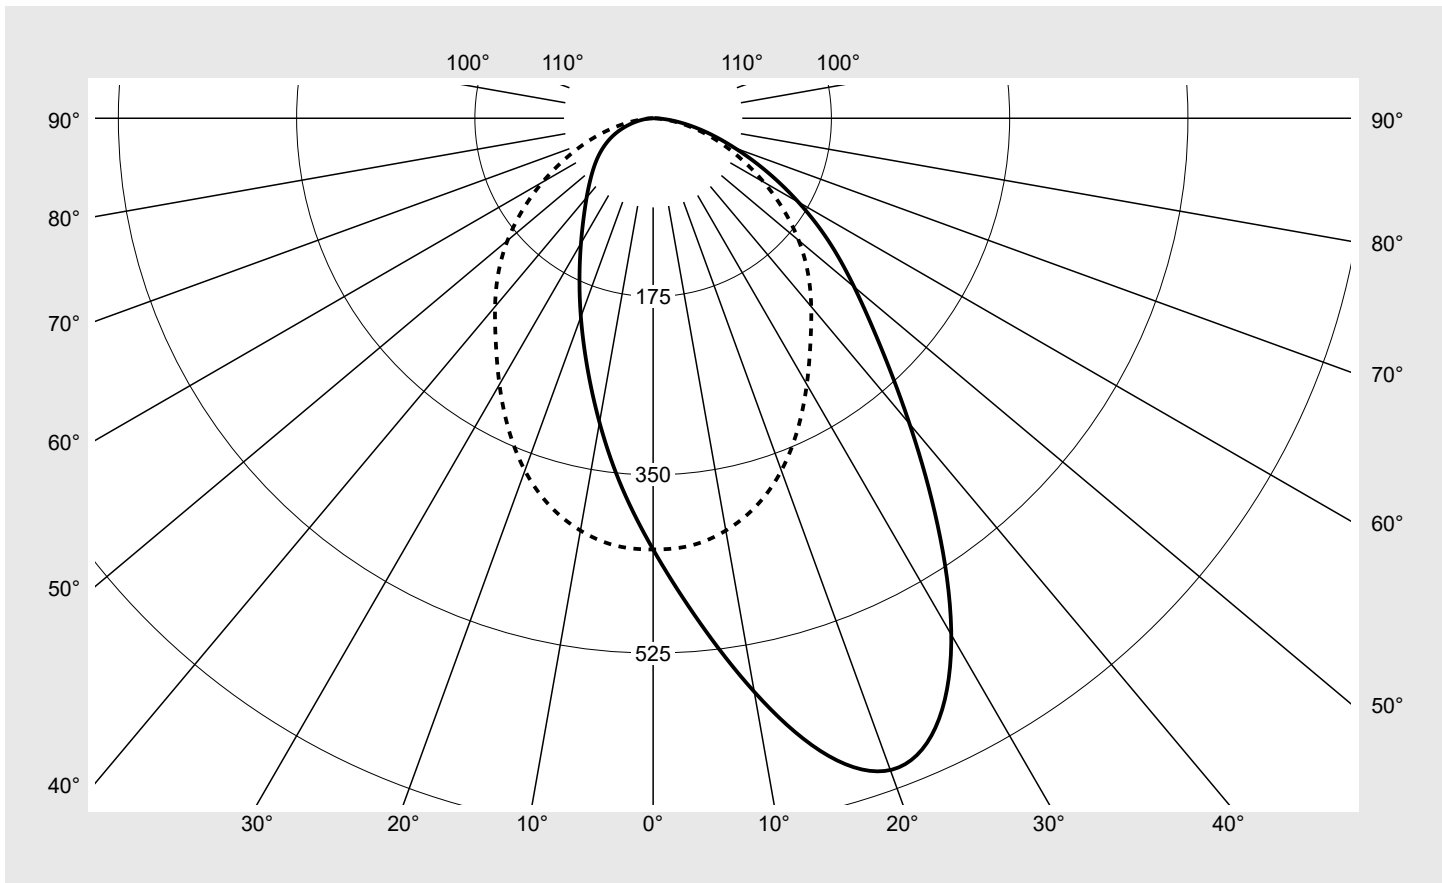

Classifications	
DIN 5040	A 4 0
CIE	N1=56 N2=84 N3=97 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE14CN485G EAN: 4058352889763	LP number 58683_290
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°
γ	Luminous intensity in cd/klm						
0°	423.3	423.3	423.3	423.3	423.3	423.3	423.3
5°	492.9	491.4	480.7	469.8	456.1	438.7	421.2
10°	571.7	566.6	544.9	518.0	484.6	447.0	411.0
15°	644.7	637.1	605.9	562.5	507.2	447.4	393.4
20°	680.9	674.8	644.8	594.0	519.7	438.2	368.1
25°	657.9	657.6	642.1	600.0	518.2	419.3	336.2
30°	585.4	591.2	594.0	574.0	501.7	394.4	301.7
35°	486.6	496.5	513.6	518.9	472.6	367.8	269.2
40°	391.6	400.9	423.7	447.6	435.3	342.4	241.4
45°	315.0	320.7	340.1	373.0	389.0	312.9	214.9
50°	257.7	259.4	273.6	305.9	334.9	275.1	186.5
55°	210.4	209.0	219.8	247.0	276.4	230.5	156.0
60°	164.7	163.2	172.4	194.6	218.3	183.7	125.4
65°	122.2	121.6	130.0	147.7	165.1	139.3	96.1
70°	85.2	85.7	92.4	106.6	118.3	100.1	70.2
75°	55.7	56.1	61.0	71.1	77.9	65.9	46.5
80°	31.6	31.9	35.4	40.3	43.4	36.3	25.7
85°	13.1	12.9	14.6	16.5	16.2	13.2	9.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm						Luminous flux in lm/klm	
0°	423.3	423.3	423.3	423.3	423.3	423.3	2.5	2.5
5°	404.2	389.5	375.7	365.6	362.1	361.8	20.2	22.8
10°	378.5	351.6	328.9	312.6	305.3	303.2	40.3	63.1
15°	347.6	311.7	283.3	263.5	254.2	251.1	59.8	123.0
20°	312.8	271.7	241.2	220.7	211.0	207.4	77.2	200.1
25°	275.0	232.7	202.9	183.7	174.4	171.0	89.9	290.0
30°	237.7	196.9	169.7	152.6	144.6	141.7	96.4	386.5
35°	204.1	165.0	141.0	127.0	121.0	118.9	96.9	483.4
40°	176.0	138.8	117.2	106.8	102.8	101.6	93.4	576.7
45°	151.3	116.9	98.0	90.5	88.3	87.8	87.1	663.9
50°	128.6	98.3	82.7	77.4	76.2	76.3	79.3	743.1
55°	107.1	82.4	69.7	65.9	65.5	66.0	69.9	813.0
60°	87.0	68.0	58.3	55.3	55.4	56.0	59.0	872.0
65°	68.6	55.0	47.7	45.3	45.4	45.9	47.4	919.5
70°	51.6	42.4	37.2	35.1	35.2	35.4	35.8	955.3
75°	35.3	29.8	26.5	24.5	24.4	24.5	24.7	980.0
80°	20.2	17.6	15.6	14.5	14.4	14.5	14.3	994.3
85°	7.8	7.1	6.7	6.2	6.2	6.3	5.7	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE14CN485G EAN: 4058352889763	LP number 58683_290
---------------------------------------	--	-------------------------------

UGR-Table		Standard room									
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	25.8	27.4	26.2	27.7	28.1	24.4	26.0	24.8	26.4	26.7
	3H	26.8	28.3	27.2	28.6	28.9	25.6	27.0	25.9	27.3	27.7
	4H	27.2	28.5	27.6	28.9	29.2	26.0	27.3	26.4	27.7	28.0
	6H	27.4	28.7	27.8	29.0	29.4	26.2	27.5	26.7	27.9	28.2
	8H	27.5	28.7	27.9	29.1	29.5	26.3	27.5	26.7	27.9	28.3
	12H	27.6	28.7	28.0	29.1	29.5	26.4	27.5	26.8	27.9	28.3
4H	2H	26.6	27.9	27.0	28.3	28.7	25.1	26.4	25.5	26.8	27.1
	3H	27.7	28.9	28.1	29.2	29.6	26.5	27.6	26.9	28.0	28.4
	4H	28.2	29.2	28.6	29.6	30.0	27.0	28.0	27.4	28.4	28.9
	6H	28.5	29.4	28.9	29.8	30.3	27.4	28.3	27.8	28.7	29.2
	8H	28.6	29.4	29.1	29.9	30.3	27.5	28.3	28.0	28.7	29.2
	12H	28.7	29.4	29.2	29.9	30.4	27.6	28.3	28.1	28.7	29.2
8H	4H	28.5	29.3	29.0	29.7	30.2	27.2	28.1	27.7	28.5	29.0
	6H	28.9	29.6	29.4	30.1	30.6	27.8	28.4	28.2	28.9	29.4
	8H	29.1	29.7	29.6	30.2	30.7	27.9	28.5	28.4	29.0	29.5
	12H	29.2	29.7	29.7	30.2	30.7	28.0	28.5	28.6	29.0	29.6
12H	4H	28.6	29.3	29.0	29.7	30.2	27.3	28.0	27.8	28.5	28.9
	6H	29.0	29.6	29.5	30.1	30.6	27.8	28.4	28.3	28.9	29.4
	8H	29.2	29.7	29.7	30.2	30.7	28.0	28.5	28.5	29.0	29.5

C-planes	Luminance table												
	Max. for $\gamma \geq 65^\circ$												
	Photometric dimensions in mm: L = 1500 B = 58												
	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°
γ	Luminance in cd/m ²												
45°	43672.1	44461.4	47162.3	51722.5	53932.4	43391.5	29798.7	20985.3	16206.1	13582.2	12552.7	12246.5	12168.5
50°	39301.8	39562.3	41732.9	46652.8	51090.4	41954.8	28449.0	19621.9	15000.0	12608.6	11799.3	11628.5	11640.1
55°	35957.5	35730.5	37568.4	42217.2	47255.1	39395.6	26660.0	18313.9	14081.4	11913.9	11269.4	11198.1	11288.9
60°	32294.6	32009.5	33807.6	38160.7	42811.4	36015.2	24580.7	17053.9	13329.5	11424.7	10852.9	10856.6	10988.2
65°	28347.7	28201.0	30152.4	34260.8	38295.9	32309.5	22299.7	15912.6	12769.8	11060.2	10514.5	10530.6	10658.4
70°	24418.0	24579.4	26494.1	30567.9	33903.9	28700.6	20122.9	14787.2	12149.2	10673.5	10048.0	10087.8	10134.8
75°	21107.5	21251.5	23093.7	26927.3	29507.5	24972.2	17631.1	13376.2	11306.3	10022.1	9264.8	9243.2	9267.1
80°	17869.2	18026.2	19972.5	22772.4	24479.3	20490.2	14526.7	11412.8	9941.9	8799.1	8209.6	8152.6	8198.9
85°	14727.9	14563.6	16378.2	18520.1	18207.3	14820.1	10274.2	8787.0	8018.7	7484.3	7029.8	6993.8	7057.9


Photometric test report

Family Licross® 21 Recessed	Order number: 52TE14CN485G EAN: 4058352889763	LP number 58683_290
--	--	--------------------------------------

Luminance values in cd/m²

γ 65°
γ 70°
γ 75°
γ 80°
γ 85°

siteco

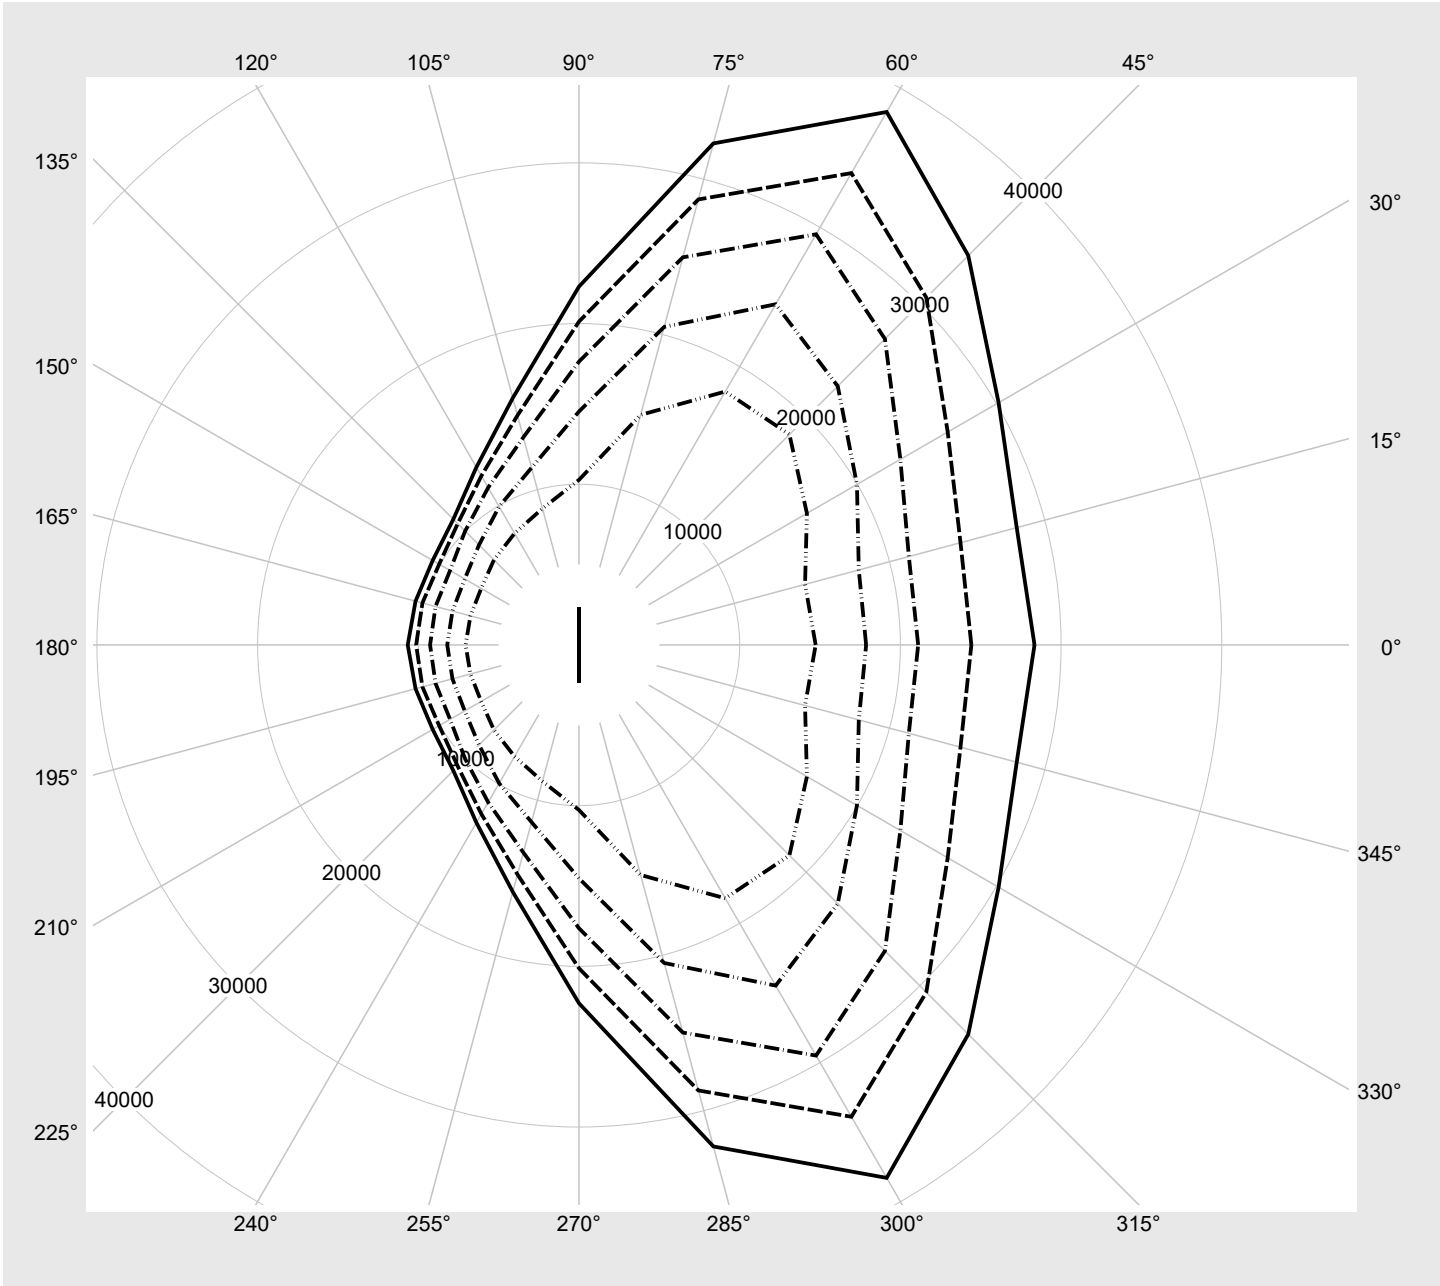

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE14CN485G EAN: 4058352889763	LP number 58683_290
---------------------------------------	--	--------------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]	Power consumption	Power consumption
	1	2	3			end of lifetime [W]	average [W]
1	A	C	E	8530	49.9	60.5	55.2
2	A	C	F	8131	47.3	56.9	52.1
3	A	D	E	7648	44.4	53.4	48.9
4	A	D	F	7164	41.4	49.5	45.4
5	B	C	E	6671	38.4	45.6	42.0
6	B	C	F	6166	35.3	42.2	38.8
7	B	D	E	5736	32.8	39.2	36.0
8	B	D	F	5231	29.9	35.3	32.6