
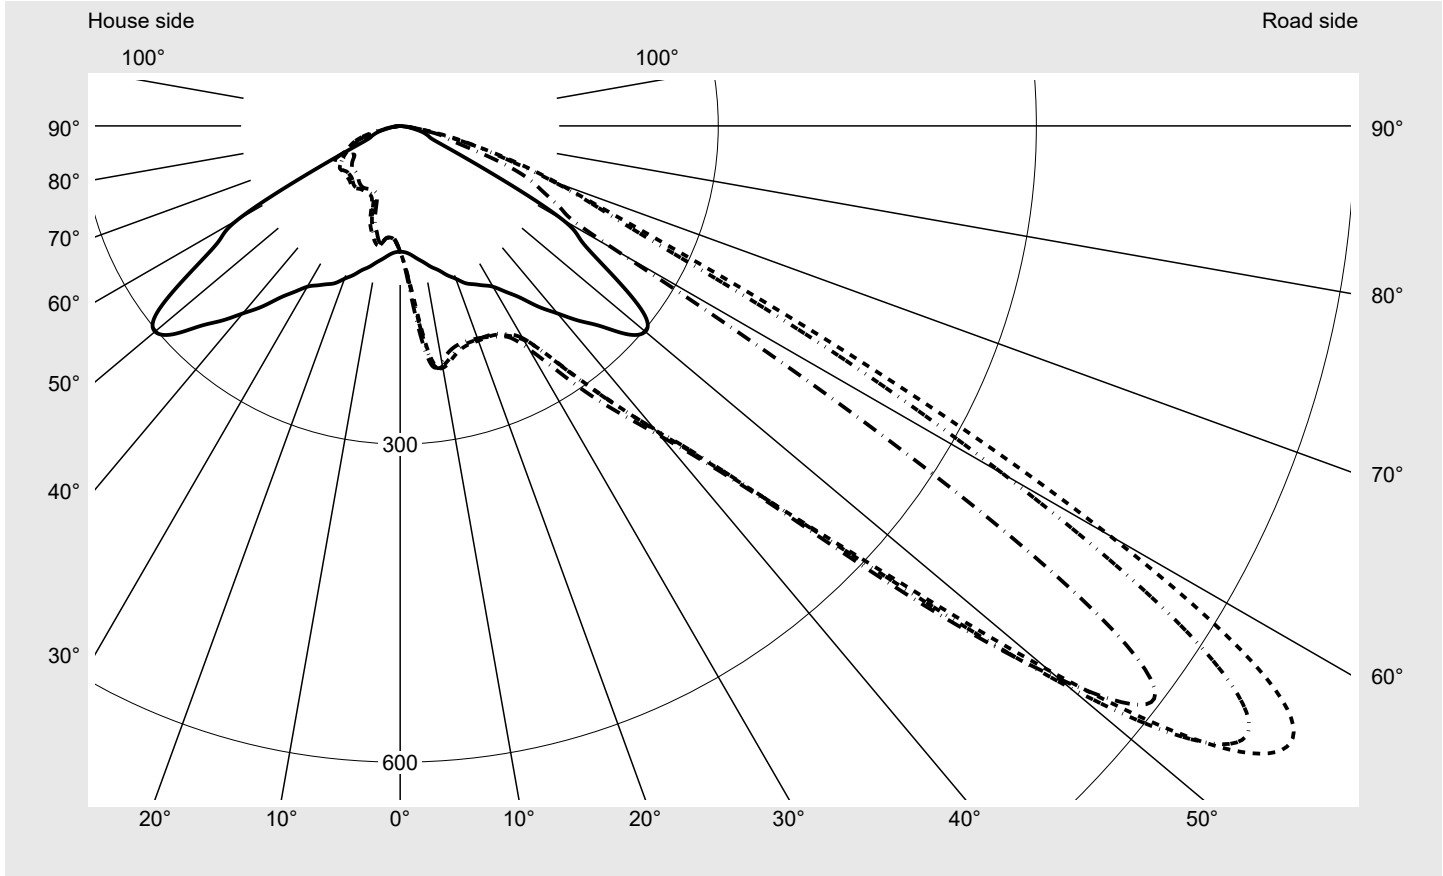


Photometric test report

Family Floodlight FL11	Order number: 5XA779114V01AA EAN: 4058352961155	LP number 59472_8
	Version standard bracket Optic asymmetric distribution PL64 Cover toughened safety glass Lamps LED 5700 K CRI ≥ 90 Controlgear ECG-DALI Rated values Ta = 10 °C Net luminous flux = 113100 lm Power consumption = 1021.6 W Luminous efficacy = 110.7 lm/W	serial documentation 23.08.2023



Luminous intensity in cd/klm
C180-0
C240-60
C245-65
C270-90
Imax: 1021 cd/klm




Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	G6
Imax 70°	158.5
Imax 80°	24.0
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779114V01AA EAN: 4058352961155	LP number 59472_8
----------------------------------	--	-----------------------------

Envelope curve in cd/klm **KMK 55°** **KMK 52.5°** **KMK 50°** **KMK 47.5°** **siteco**

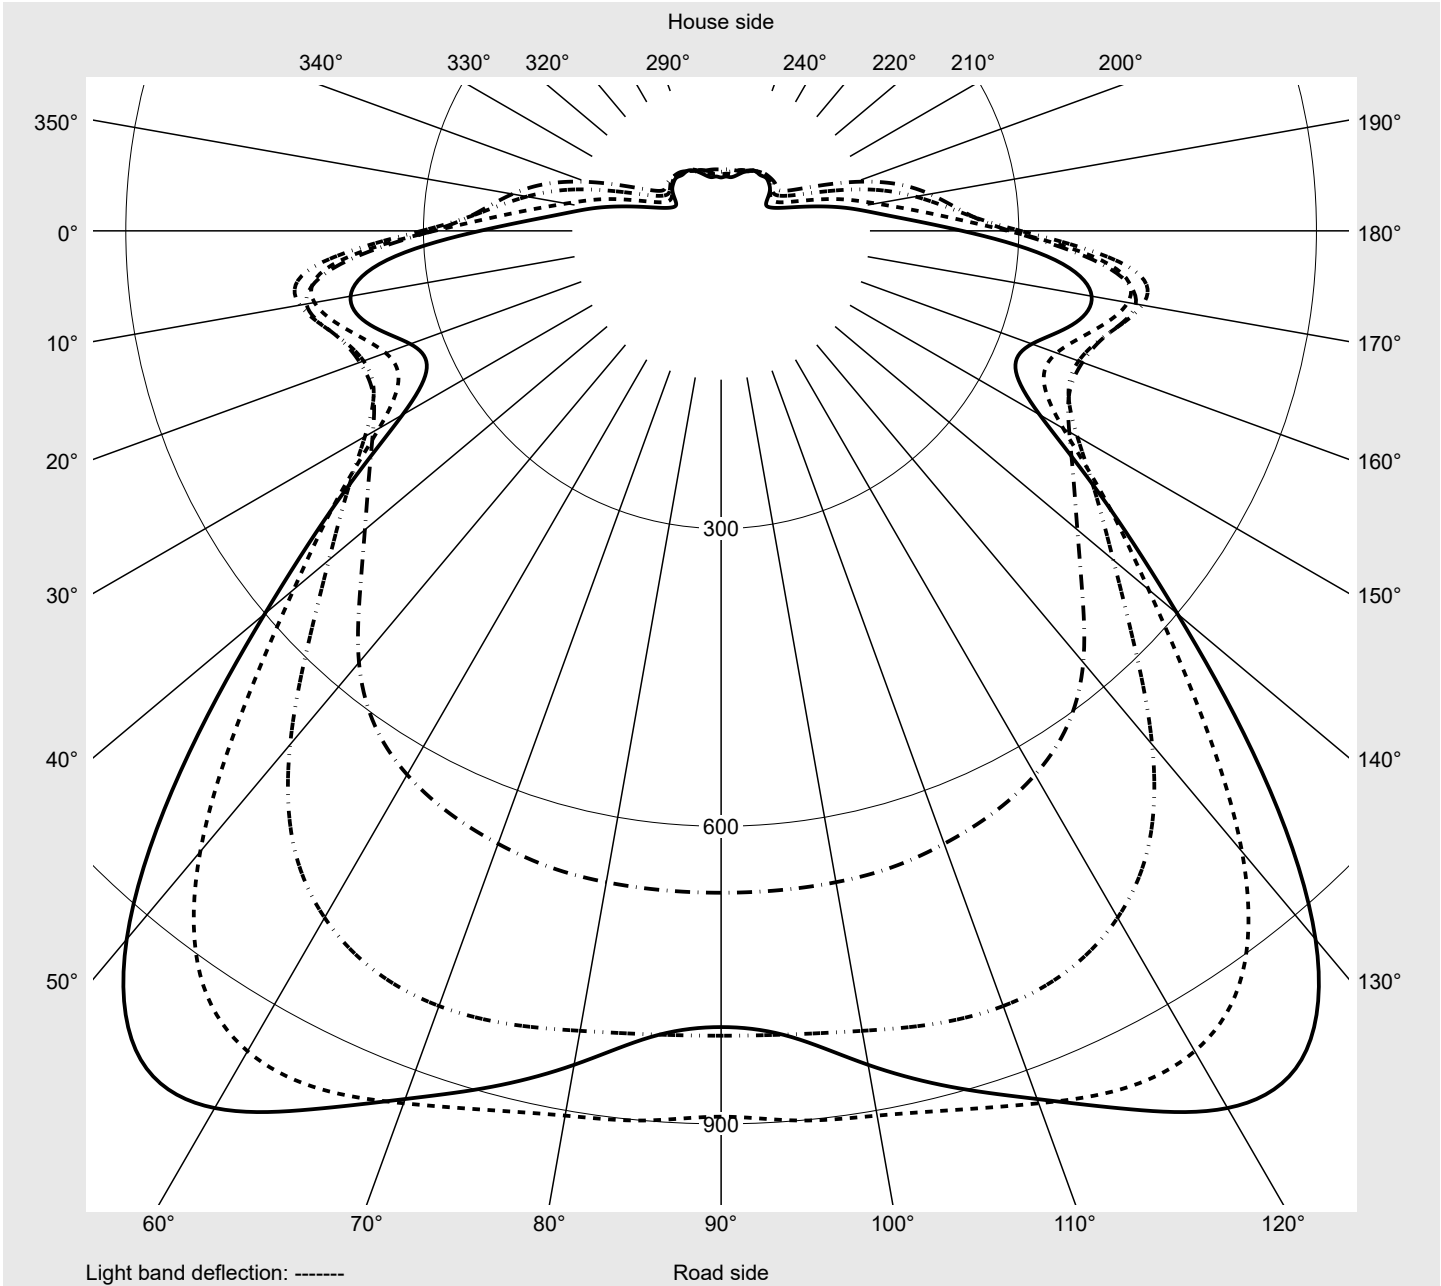

Photometric test report

Family Floodlight FL11	Order number: 5XA779114V01AA EAN: 4058352961155	LP number 59472_8
---	--	------------------------------------

siteco

Table of values for luminous intensities Maximum luminous intensity


C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7
2,5°	119.5	120.9	122.4	124.1	125.8	127.4	129.0	130.6	132.2	133.6	134.9	135.9	137.0
5,0°	122.3	125.8	129.6	133.3	137.2	141.3	145.4	149.9	154.6	159.2	163.8	168.3	172.8
7,5°	126.5	132.0	138.1	144.5	151.3	159.4	168.6	179.1	190.2	200.5	209.2	215.6	220.2
10,0°	130.9	139.0	147.4	156.8	168.5	183.1	199.3	214.0	224.2	229.7	232.4	232.6	231.8
12,5°	136.3	146.7	157.8	172.0	191.1	212.1	226.7	234.2	236.2	234.5	231.6	228.3	225.3
15,0°	141.0	154.0	168.5	188.5	213.0	230.0	237.6	237.6	233.7	229.4	225.5	221.7	218.7
17,5°	147.6	162.6	180.1	207.1	229.0	239.2	238.8	234.4	229.6	225.5	221.6	218.4	215.9
20,0°	153.4	170.9	193.3	221.5	238.9	242.1	238.4	233.8	229.7	225.5	221.5	218.1	215.5
22,5°	160.5	179.7	207.1	234.4	245.6	244.2	241.1	237.7	233.5	228.3	223.1	218.8	215.5
25,0°	164.8	186.8	218.2	242.9	249.2	248.8	248.2	245.4	239.9	233.1	226.3	220.8	217.3
27,5°	169.6	194.1	227.7	248.3	253.8	257.5	259.1	255.6	248.6	240.1	232.1	226.6	223.3
30,0°	175.1	202.7	236.8	254.3	261.8	269.1	271.2	266.8	258.7	250.0	243.1	237.3	233.0
32,5°	185.6	216.2	250.3	266.9	276.4	284.4	285.7	279.4	271.3	265.4	260.3	255.3	254.0
35,0°	198.0	233.3	269.0	286.5	299.5	305.4	301.8	293.4	289.7	288.9	288.0	288.1	288.1
37,5°	215.2	255.7	292.3	314.0	330.8	328.0	314.6	310.7	315.3	321.3	326.6	328.3	328.4
40,0°	230.8	280.3	323.6	349.8	357.7	344.6	332.6	335.8	347.0	361.7	372.5	376.1	375.0
42,5°	249.1	308.5	362.0	378.6	371.0	360.8	358.1	365.9	384.0	406.1	425.1	432.5	430.8
45,0°	267.0	343.3	395.4	393.0	380.0	376.1	384.1	400.6	425.2	456.4	489.1	508.7	514.6
47,5°	290.9	385.2	424.4	403.1	387.5	387.2	405.2	433.4	468.7	514.7	567.8	608.5	632.9
50,0°	301.8	411.6	431.0	402.8	383.5	386.3	414.5	460.4	516.0	588.4	675.8	752.3	799.3
52,5°	288.8	393.5	416.1	388.3	359.8	358.9	398.1	473.0	562.4	681.0	816.7	915.4	954.6
55,0°	242.9	338.1	379.2	366.2	333.3	327.3	370.8	469.1	600.3	770.6	932.0	1019.8	1020.8
57,5°	203.2	264.4	322.8	325.6	307.1	308.2	353.7	473.3	645.9	816.0	952.7	1011.0	967.8
60,0°	176.9	218.8	282.7	301.7	302.6	320.1	369.6	512.6	680.9	794.2	870.1	863.1	772.6
62,5°	100.6	147.9	213.6	250.4	276.8	321.6	416.7	580.8	682.3	701.5	658.3	589.3	526.4
65,0°	52.2	75.3	126.0	166.1	202.5	264.7	379.0	503.6	557.9	482.0	403.1	361.8	327.9
67,5°	33.4	45.5	77.7	114.5	140.6	173.8	233.5	302.4	314.1	261.9	219.3	214.6	215.7
70,0°	28.7	34.1	45.8	69.0	93.0	107.1	129.9	149.4	153.2	125.9	115.4	137.6	158.5
72,5°	25.2	28.2	29.2	34.1	48.0	59.5	67.5	60.0	40.3	46.0	63.2	93.8	115.2
75,0°	20.6	22.2	23.2	28.6	30.2	39.7	42.5	26.8	29.1	36.0	44.1	60.6	76.0
77,5°	14.1	15.7	16.9	21.3	23.0	28.4	27.9	21.0	21.6	26.1	29.9	41.2	49.7
80,0°	9.2	10.0	12.2	14.4	17.3	18.2	18.2	15.6	14.4	17.4	17.5	22.6	24.0
82,5°	5.5	6.1	8.1	9.6	11.7	12.6	11.7	10.1	8.6	9.8	9.7	9.9	10.0
85,0°	2.5	3.0	4.2	5.3	6.0	6.3	5.6	4.6	3.6	2.8	2.7	2.8	3.0
87,5°	0.9	1.1	1.3	1.4	1.5	1.4	1.2	1.0	0.9	0.8	0.9	0.9	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779114V01AA EAN: 4058352961155	LP number 59472_8
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7
2,5°	138.0	138.7	139.3	140.0	140.8	140.9	117.9	116.5	115.3	114.2	113.1	112.3	111.5
5,0°	176.8	180.1	183.0	185.2	187.0	187.5	119.2	116.4	114.1	112.2	110.6	109.4	108.5
7,5°	223.1	225.2	226.1	226.7	227.2	227.5	121.5	117.5	114.4	112.0	110.5	109.5	108.6
10,0°	230.2	228.7	227.2	226.2	225.6	225.7	124.0	118.8	115.2	113.0	111.5	110.5	109.9
12,5°	222.6	220.6	218.9	217.8	217.0	217.1	127.0	120.4	116.4	114.3	113.1	113.5	115.7
15,0°	216.5	215.1	214.1	213.3	212.9	213.3	129.6	121.8	117.7	115.8	116.6	119.5	120.5
17,5°	214.4	213.4	212.7	212.3	212.1	212.5	133.2	124.3	119.9	119.3	122.7	123.3	120.9
20,0°	214.1	213.6	213.2	213.0	213.1	213.3	137.1	127.4	123.4	126.6	126.9	123.9	116.6
22,5°	214.3	214.4	214.7	215.0	215.1	215.5	141.6	131.5	130.1	133.5	129.8	121.1	112.4
25,0°	216.2	216.9	218.0	218.7	219.0	219.2	144.8	135.6	139.1	137.9	129.9	118.0	107.7
27,5°	221.4	221.4	222.7	224.2	224.9	225.3	148.8	141.1	148.2	141.8	128.2	114.5	99.6
30,0°	231.3	233.0	236.6	240.1	242.2	243.1	154.8	149.7	156.9	144.7	125.6	108.0	89.9
32,5°	254.6	257.7	262.7	267.4	270.4	271.7	164.4	162.0	166.2	147.7	123.8	99.9	84.5
35,0°	289.2	292.3	297.4	302.4	305.8	307.3	176.3	176.8	173.6	149.1	120.8	94.1	82.0
37,5°	329.5	331.1	334.3	338.5	341.3	342.6	189.7	187.5	178.7	151.6	120.7	94.9	82.2
40,0°	373.3	373.3	375.2	378.3	380.7	381.9	201.5	195.6	181.9	155.8	121.6	97.2	83.0
42,5°	427.9	427.5	429.7	432.8	434.9	435.9	213.0	203.0	186.2	161.1	124.4	97.5	82.2
45,0°	515.9	516.7	519.4	522.7	524.5	524.6	228.5	211.1	186.6	157.6	119.9	91.7	77.6
47,5°	647.7	657.3	664.1	666.6	667.1	667.1	241.9	213.6	182.8	144.4	107.2	82.1	71.3
50,0°	823.6	831.4	827.5	818.7	812.9	811.2	237.2	198.9	160.0	117.9	86.6	70.6	65.1
52,5°	954.4	935.7	917.1	905.4	900.0	892.7	208.7	158.6	123.3	89.3	68.1	60.6	60.6
55,0°	976.9	931.1	893.0	853.5	815.6	802.4	171.6	131.0	95.0	68.3	55.6	52.4	57.3
57,5°	866.1	761.2	674.8	597.6	539.1	514.3	155.1	115.7	79.1	56.8	48.7	47.5	53.9
60,0°	657.6	553.5	435.7	331.3	258.5	238.3	137.5	95.3	65.7	50.4	43.4	44.7	50.5
62,5°	454.3	354.9	248.8	185.2	174.2	172.9	91.7	61.1	55.6	46.0	39.3	39.9	45.7
65,0°	283.3	224.2	165.4	154.7	151.8	150.6	55.4	44.9	47.1	42.1	36.8	36.0	39.7
67,5°	203.8	163.6	142.4	137.1	134.0	131.8	39.2	38.4	38.9	37.8	35.3	33.6	35.9
70,0°	154.3	127.7	119.4	113.4	105.6	101.9	29.8	33.0	35.2	34.9	32.9	30.9	33.4
72,5°	107.0	89.2	82.5	76.1	68.1	64.5	24.7	26.7	29.6	29.3	27.7	26.7	28.3
75,0°	73.6	60.1	54.2	53.5	49.0	46.2	21.4	23.0	23.8	23.4	22.6	21.8	21.8
77,5°	43.5	36.8	35.5	41.0	40.5	37.4	15.8	17.8	17.7	16.9	17.1	16.0	15.3
80,0°	22.6	21.6	21.1	23.7	20.1	17.7	10.0	11.6	11.6	11.4	11.2	10.3	9.6
82,5°	9.7	9.3	9.3	9.6	7.9	7.0	5.9	6.6	7.0	7.0	6.5	5.9	5.5
85,0°	2.9	2.8	2.5	2.4	2.3	2.3	2.8	3.2	3.6	3.2	3.0	2.9	2.6
87,5°	0.9	0.9	0.9	0.9	0.9	0.9	1.0	1.1	1.2	1.2	1.2	1.1	1.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779114V01AA EAN: 4058352961155	LP number 59472_8
Table of values for luminous intensities		Maximum luminous intensity
		

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	0.2	0.2
2,5°	110.8	110.2	109.6	109.2	108.8	108.5	108.3	108.2	108.1	107.7	107.7	1.5	1.6
5,0°	107.8	107.2	106.7	106.4	106.0	105.7	105.5	105.4	105.2	105.0	104.9	3.2	4.8
7,5°	107.8	107.1	106.8	106.9	107.4	107.9	108.5	109.0	109.3	109.4	109.3	5.4	10.2
10,0°	110.4	111.9	113.3	113.9	114.3	114.1	113.5	112.9	112.3	111.8	111.4	7.6	17.8
12,5°	117.2	117.6	116.5	114.2	111.2	108.5	106.4	104.7	103.5	102.6	102.2	9.6	27.4
15,0°	119.4	115.6	111.1	107.2	103.5	100.3	97.6	95.5	93.8	92.6	92.0	11.4	38.8
17,5°	115.0	109.5	104.3	99.2	93.8	88.0	82.5	78.0	75.0	73.3	72.6	13.1	51.9
20,0°	109.9	103.3	95.5	86.2	78.0	72.9	70.2	68.6	67.6	67.0	66.7	14.9	66.8
22,5°	104.0	93.0	81.4	74.7	71.6	69.7	68.3	67.3	66.5	66.0	65.8	16.7	83.5
25,0°	94.5	81.7	75.5	72.3	70.4	69.0	68.0	67.2	66.6	66.1	65.9	18.7	102.3
27,5°	85.0	77.8	73.8	71.4	70.0	69.2	68.6	67.9	67.4	67.0	66.8	20.9	123.1
30,0°	80.9	76.0	72.9	71.0	70.0	69.5	69.1	68.5	68.0	67.6	67.6	23.4	146.5
32,5°	78.2	74.6	72.3	71.0	70.5	70.3	69.7	68.9	68.2	67.7	67.5	26.6	173.1
35,0°	76.1	73.5	72.5	72.4	72.0	71.2	70.0	68.6	67.5	66.7	66.3	30.5	203.6
37,5°	75.6	73.3	73.4	73.8	73.0	71.1	69.0	67.1	65.5	64.6	64.3	35.1	238.7
40,0°	76.1	74.0	73.9	74.0	72.1	69.3	66.7	64.3	62.8	62.1	61.7	40.2	279.0
42,5°	76.9	74.8	73.9	72.8	70.4	67.2	64.6	62.9	61.7	61.1	60.9	46.2	325.2
45,0°	75.7	74.6	73.0	72.0	69.6	66.4	63.8	62.4	61.3	60.7	60.5	53.7	378.9
47,5°	72.1	72.9	72.8	72.1	69.5	66.2	63.7	62.7	62.6	62.2	61.9	63.4	442.3
50,0°	67.2	71.2	72.5	71.6	69.5	66.6	65.2	63.1	60.8	59.8	59.6	73.9	516.3
52,5°	64.4	69.3	71.6	70.8	69.2	68.2	63.9	60.6	58.3	57.8	57.1	81.7	597.9
55,0°	64.2	68.0	70.0	68.7	69.4	67.3	62.5	57.6	54.9	55.0	53.8	83.2	681.1
57,5°	62.3	67.1	67.2	66.0	66.6	65.8	60.2	55.2	52.9	52.6	51.1	76.1	757.2
60,0°	57.3	64.1	64.3	62.2	63.1	63.2	58.7	54.8	53.1	55.2	56.2	65.5	822.7
62,5°	51.2	57.8	61.2	58.7	58.9	59.2	57.8	56.8	62.8	70.0	69.3	53.9	876.6
65,0°	46.0	50.6	55.4	54.9	54.3	55.7	57.4	66.3	66.7	59.9	56.9	40.4	917.0
67,5°	39.9	43.1	46.6	48.3	49.4	51.9	60.8	65.3	58.0	53.0	50.7	28.1	945.1
70,0°	33.8	34.3	37.9	40.4	42.2	47.5	59.1	60.1	51.6	47.0	45.7	19.5	964.6
72,5°	26.5	26.0	26.8	30.1	34.3	41.5	47.9	49.8	43.4	38.3	37.0	12.6	977.3
75,0°	20.0	17.9	19.3	21.6	25.3	33.0	36.3	36.9	34.0	30.0	28.4	9.1	986.4
77,5°	13.7	12.6	13.0	14.9	17.2	22.7	24.4	24.6	24.0	21.6	19.8	6.5	992.8
80,0°	8.4	8.1	8.4	9.3	10.4	12.2	13.9	14.2	14.0	13.2	12.2	3.9	996.8
82,5°	4.9	4.6	4.7	5.2	5.6	6.0	6.8	6.8	6.5	6.2	5.7	2.1	998.9
85,0°	2.4	2.2	2.2	2.2	2.2	2.2	2.1	2.0	2.0	2.0	2.0	0.8	999.7
87,5°	1.1	1.1	1.2	1.2	1.2	1.2	1.2	1.3	1.3	1.3	1.3	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779114V01AA EAN: 4058352961155	LP number 59472_8
----------------------------------	--	-----------------------------

siteco

Dimming levels table environmental temperature: 10°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
99	252	254	112416	1013.7
95	238	252	107501	957.1
90	222	249	101615	892.9
85	207	247	95998	832.8
80	193	244	90472	776.7
75	179	241	84849	721.0
70	165	238	79101	665.4
65	152	235	73706	614.4
60	138	232	67713	559.1
55	125	228	62033	508.4
50	113	224	56623	461.5
45	101	220	51105	415.1
40	89	216	45440	368.4
35	77	210	39674	322.6
30	65	204	33747	276.9
25	54	197	28206	235.1
20	43	189	22630	194.5
15	32	178	17056	148.1
10	21	163	11309	102.5
5	10	136	5473	55.4
1	3	91	1523	27.7

Dimming levels table environmental temperature: 25°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
95	----	----	----	----
90	221	249	98695	882.7
85	206	246	93342	822.7
80	191	244	87560	763.0
75	177	241	82184	707.7
70	163	238	76700	652.3
65	149	235	71095	597.6
60	136	231	65668	547.0
55	123	228	60110	496.4
50	111	224	54846	450.1
45	99	220	49491	403.8
40	87	215	43916	357.7
35	75	209	38306	312.1
30	64	204	32925	270.7
25	53	197	27448	229.3
20	42	188	21978	189.0
15	31	177	16452	141.9
10	20	161	10723	97.7
5	10	136	5454	54.8
1	3	92	1519	27.4

Photometric test report

Family Floodlight FL11	Order number: 5XA779114V01AA EAN: 4058352961155	LP number 59472_8
----------------------------------	--	-----------------------------

Luminousfluxs table



Temperature °C	Luminous flux lm	Power consumption W
10.0	113100.0	1021.6
25.0	99550.0	892.4