

Photometric test report

Family
Licross® 21 Protected

Order number: 52TD1BMN4EXM
EAN: 4058352903346

LP number
58521_164




Version prismatic cover, frosted, wide distribution
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG Multilumen
Rated values Net luminous flux = 14040 lm
 Power consumption = 83.2 W
 Luminous efficacy = 168.7 lm/W

serial
documentation
24.08.2023

sitEco

Luminous intensity in cd/klm **C180-0** **C270-90**

Imax: 419 cd/klm

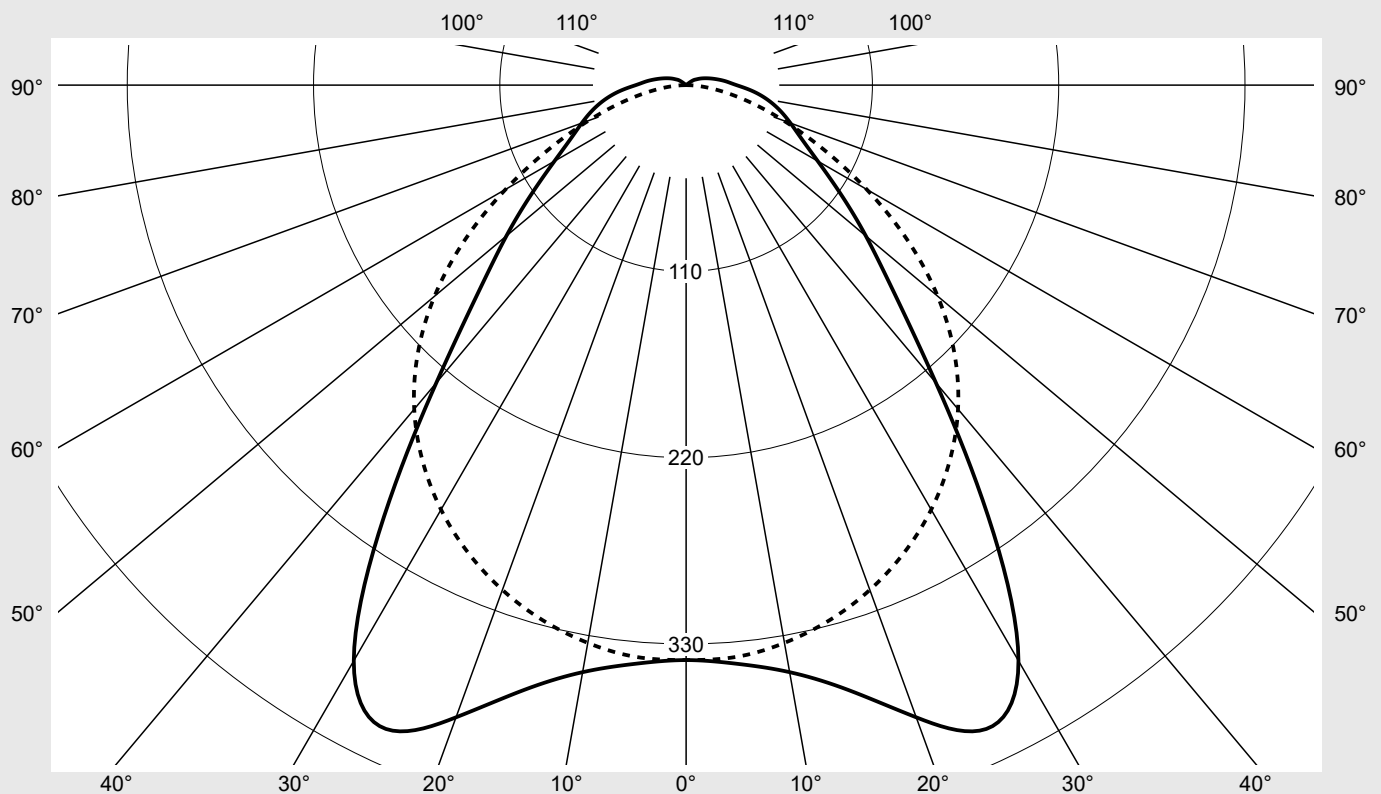

Classifications

DIN 5040 A 4 1
 CIE N1=54 N2=82 N3=95
 N4=97 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 96.8%
 ϕ_o 3.2%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Protected	Order number: 52TD1BMN4EXM EAN: 4058352903346	LP number 58521_164
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	339.5	339.5	339.5	339.5	339.5	339.5	339.5	2.0	2.0
5°	343.0	342.0	339.2	339.3	339.7	338.8	338.9	16.2	18.3
10°	352.0	350.9	345.1	341.6	338.4	335.1	334.4	32.6	50.9
15°	369.7	367.9	356.8	346.8	337.2	329.4	327.1	49.3	100.2
20°	397.2	393.9	374.9	354.6	335.9	321.8	317.2	66.8	167.0
25°	419.5	416.9	395.3	365.3	334.4	312.1	304.6	84.4	251.4
30°	392.5	397.1	392.3	370.7	332.1	300.1	289.4	97.4	348.9
35°	311.0	322.2	341.8	350.7	323.8	285.3	271.2	100.3	449.2
40°	229.5	240.6	267.7	298.9	299.5	266.8	249.8	94.7	543.9
45°	174.0	182.0	204.5	237.4	256.3	239.9	224.1	85.2	629.1
50°	138.5	144.4	161.2	187.1	207.0	203.8	193.9	74.9	704.0
55°	110.9	115.6	129.9	149.5	163.4	162.9	159.6	64.1	768.1
60°	89.8	92.9	103.5	120.2	127.5	124.1	123.1	53.4	821.5
65°	75.3	77.0	82.7	94.9	98.6	91.3	89.2	43.6	865.1
70°	65.6	65.8	66.8	73.1	74.5	64.6	61.3	35.1	900.1
75°	57.2	56.6	54.5	55.3	53.6	43.2	39.2	27.5	927.6
80°	48.6	47.5	44.1	40.6	36.2	26.8	21.9	20.7	948.4
85°	39.1	38.1	34.6	29.4	22.8	14.4	9.2	14.9	963.2
90°	29.7	28.9	25.8	20.2	13.1	5.9	0.8	10.0	973.2
95°	24.0	23.5	21.5	16.6	10.0	3.6	0.7	8.0	981.2
100°	19.1	18.8	17.3	13.3	7.4	1.9	0.7	6.2	987.3
105°	15.1	14.8	13.5	10.2	5.0	0.8	0.6	4.6	991.9
110°	11.8	11.4	10.2	7.3	2.9	0.6	0.6	3.3	995.3
115°	9.1	8.6	7.4	4.7	1.4	0.7	0.7	2.3	997.5
120°	6.7	6.2	4.9	2.7	0.8	0.7	0.8	1.5	999.1
125°	4.5	4.0	2.9	1.3	0.8	0.8	0.8	0.9	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 21 Protected	Order number: 52TD1BMN4EXM EAN: 4058352903346	LP number 58521_164
--	--	-------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	22.3	24.0	22.7	24.3	24.6	24.2	25.8	24.5	26.1	26.5
	3H	23.5	25.0	23.9	25.3	25.7	25.2	26.7	25.6	27.0	27.4
	4H	24.2	25.6	24.6	26.0	26.3	25.6	26.9	26.0	27.3	27.7
	6H	25.0	26.3	25.4	26.6	27.0	25.8	27.1	26.2	27.5	27.8
	8H	25.4	26.6	25.8	27.0	27.4	25.9	27.1	26.4	27.5	27.9
	12H	25.8	26.9	26.2	27.3	27.7	26.0	27.1	26.4	27.5	27.9
4H	2H	23.2	24.6	23.6	24.9	25.3	24.6	26.0	25.0	26.4	26.7
	3H	24.6	25.7	25.0	26.1	26.5	25.9	27.1	26.3	27.5	27.9
	4H	25.4	26.4	25.8	26.8	27.3	26.4	27.5	26.8	27.9	28.3
	6H	26.3	27.2	26.7	27.6	28.1	26.8	27.7	27.2	28.1	28.6
	8H	26.8	27.6	27.2	28.1	28.5	26.9	27.7	27.4	28.2	28.7
	12H	27.2	28.0	27.7	28.5	28.9	27.0	27.8	27.5	28.2	28.7
8H	4H	25.8	26.6	26.3	27.1	27.6	26.7	27.5	27.2	28.0	28.5
	6H	26.9	27.6	27.4	28.1	28.6	27.2	27.9	27.7	28.4	28.9
	8H	27.5	28.1	28.0	28.6	29.1	27.4	28.1	27.9	28.5	29.1
	12H	28.1	28.6	28.6	29.1	29.7	27.6	28.1	28.1	28.6	29.2
12H	4H	25.9	26.6	26.3	27.1	27.6	26.8	27.5	27.2	28.0	28.5
	6H	27.0	27.6	27.5	28.1	28.6	27.3	28.0	27.8	28.4	29.0
	8H	27.7	28.2	28.2	28.7	29.2	27.6	28.1	28.1	28.6	29.2


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1480	H(C0) = 13	H(C180) = 13
			B = 78	H(C90) = 0	H(C270) = 0

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		25651.7	26956.7	30743.1	36528.8	40696.1	39553.1	38539.8	
50°		21869.6	22926.9	26029.7	31033.6	35630.3	36677.8	36687.6	
55°		18987.9	19927.7	22838.6	27129.5	30957.6	32542.6	33833.4	
60°		16944.3	17669.0	20143.7	24274.1	27104.1	28097.9	29934.7	
65°		15971.5	16462.2	18170.1	21792.9	24074.4	24043.4	25662.6	
70°		15988.5	16220.9	17008.1	19641.8	21556.0	20550.0	21814.9	
75°		16569.9	16623.1	16637.2	18038.2	19225.7	17484.8	18430.8	
80°		17481.9	17389.3	16989.3	17055.5	17237.6	15070.9	15368.0	
85°		18782.1	18698.4	18202.9	17487.1	16318.7	13457.7	12868.9	

Photometric test report

Family Licross® 21 Protected	Order number: 52TD1BMN4EXM EAN: 4058352903346	LP number 58521_164
--	--	--------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

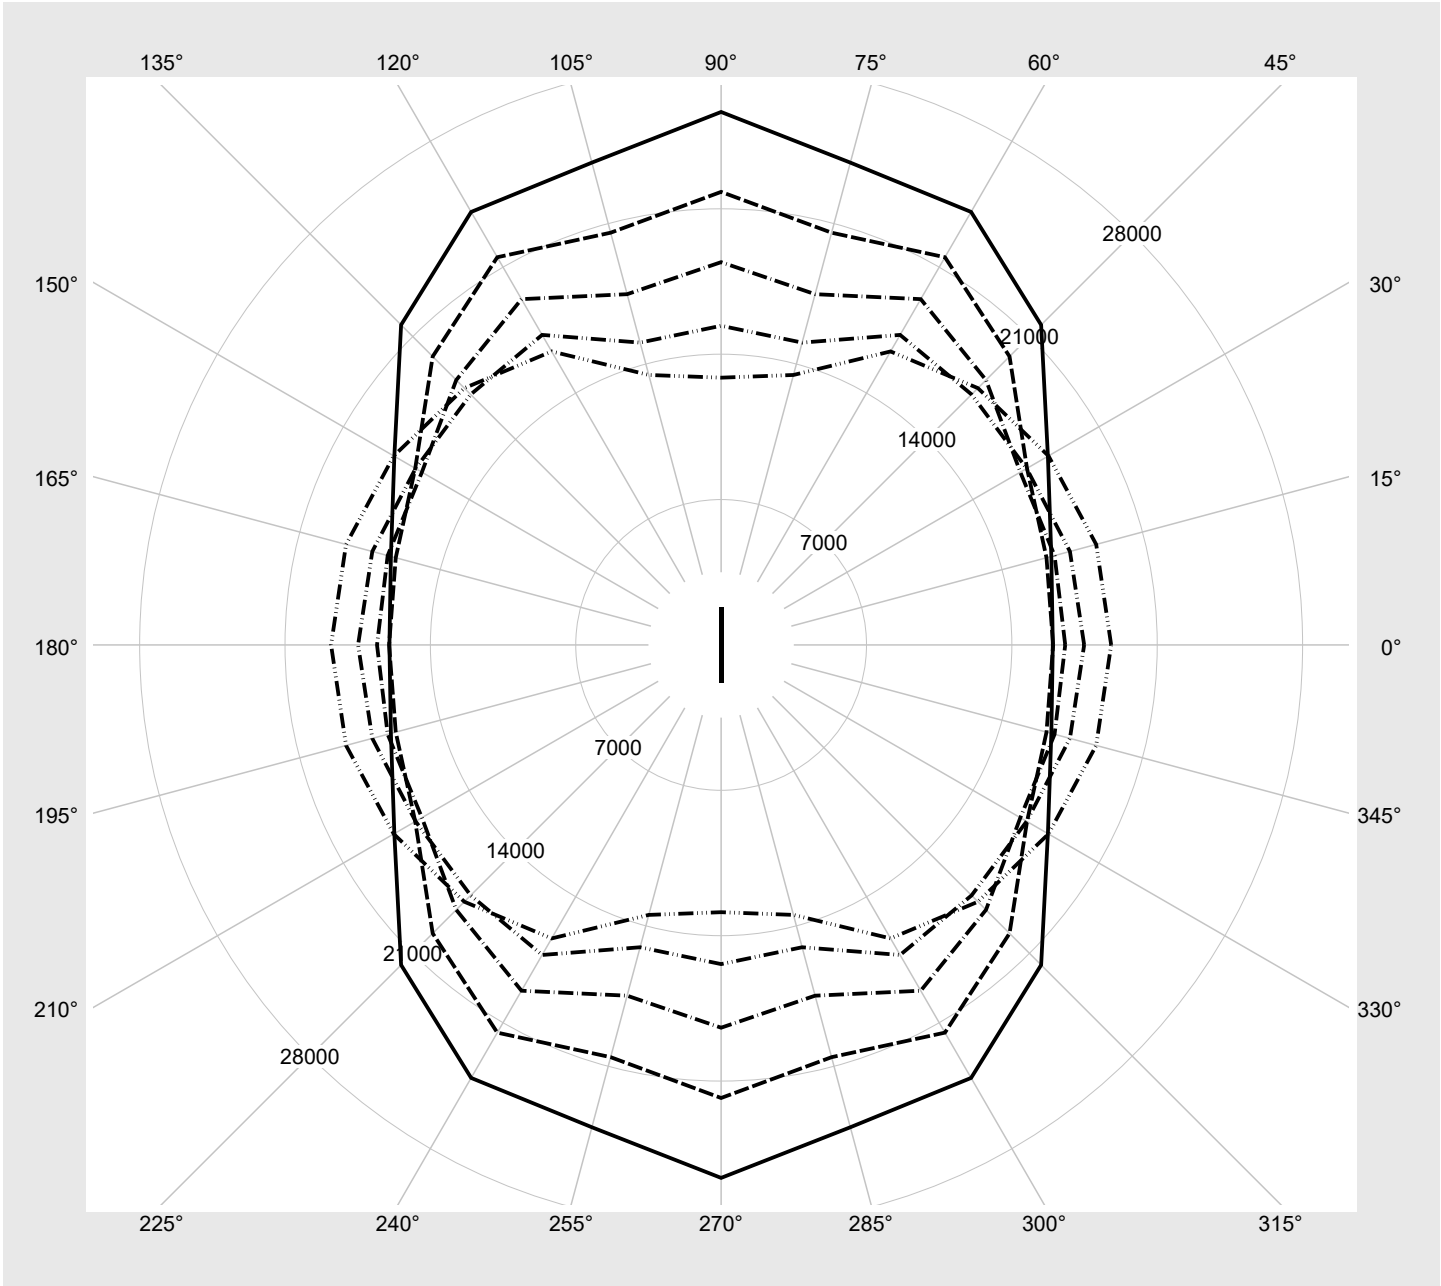

Photometric test report

Family Licross® 21 Protected	Order number: 52TD1BMN4EXM EAN: 4058352903346	LP number 58521_164
--	--	--------------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
1	A	C	E	14040	83.2
2	A	C	F	13189	78.5
3	A	D	E	12255	72.4
4	A	D	F	11310	66.3
5	B	C	E	10354	60.3
6	B	C	F	9378	54.3
7	B	D	E	8464	48.8
8	B	D	F	7550	43.3