

Photometric test report

Family
LANTERN CLASSIC LED

Order number: 5XA5245EV14H000022
EAN: 4058352023907

LP number
57124_66

serial
documentation
11.10.2023

siteco



Version post-top- or mounting to wall arm, Smart Interface up
Optic asymmetric, wide distribution (ST1.2a)
Cover cover transparent, PMMA
Lamps LED 3000 K | CRI ≥ 70
Controlgear EVG SITECO iQ - Smart Interface
Rated values Net luminous flux = 1370 lm
Power consumption = 10.7 W
Luminous efficacy = 128 lm/W

Luminous intensity in cd/klm


C180-0

C205-25

C210-30

C270-90

Imax: 877 cd/klm

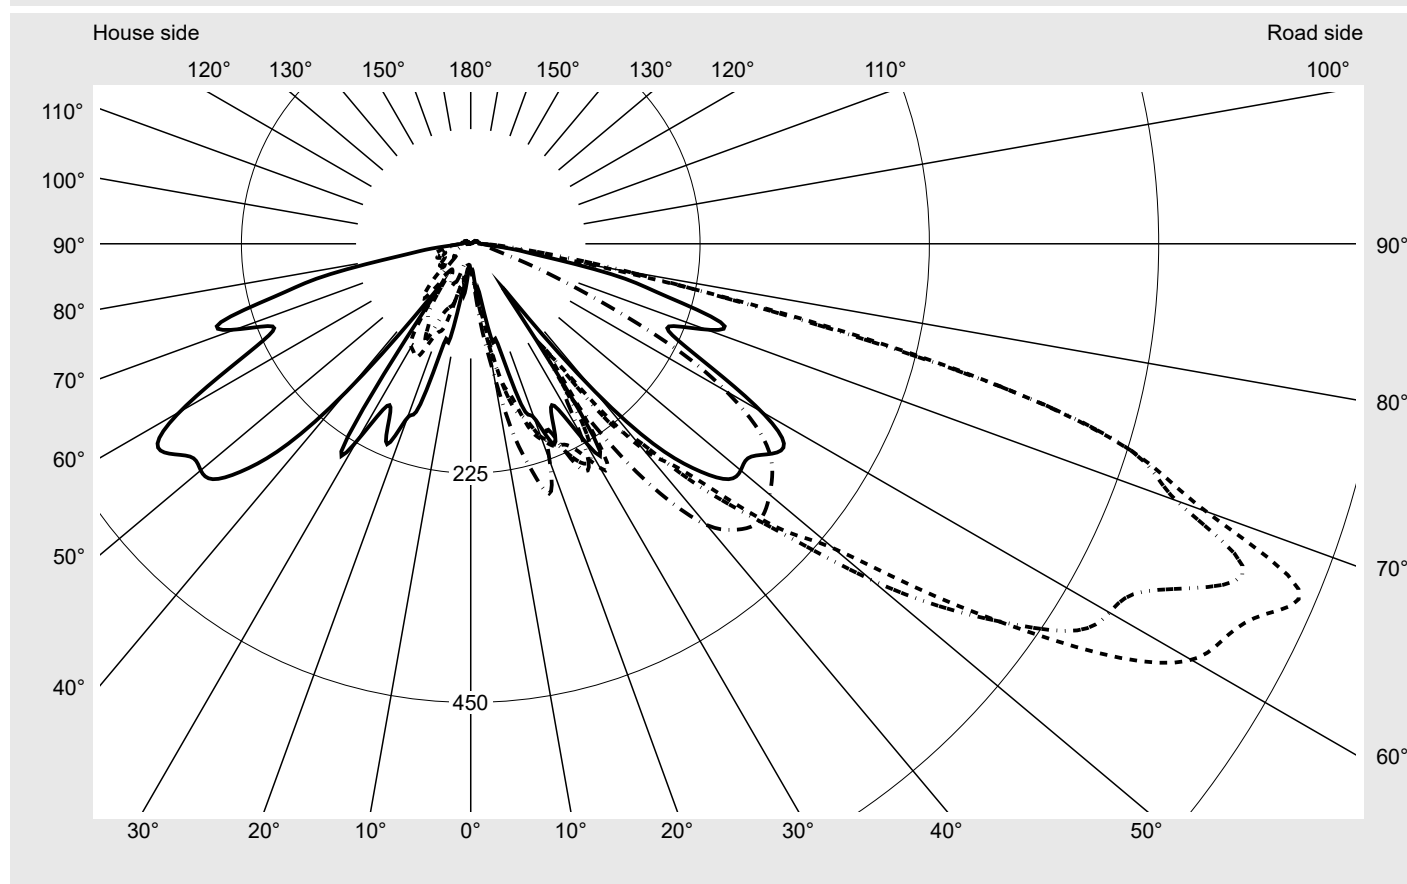

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	97.4%
Eta 90° - 180°	2.6%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	767.4
Imax 80°	154.8
Imax 90°	11.0
Imax >90°	10.7
Imax >95°	10.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family
LANTERN CLASSIC LED

Order number: **5XA5245EV14H000022**
EAN: **4058352023907**

LP number
57124_66

Envelope curve in cd/klm

KMK 67.5°


KMK 65°

KMK 62.5°

KMK 60°

sit

eco

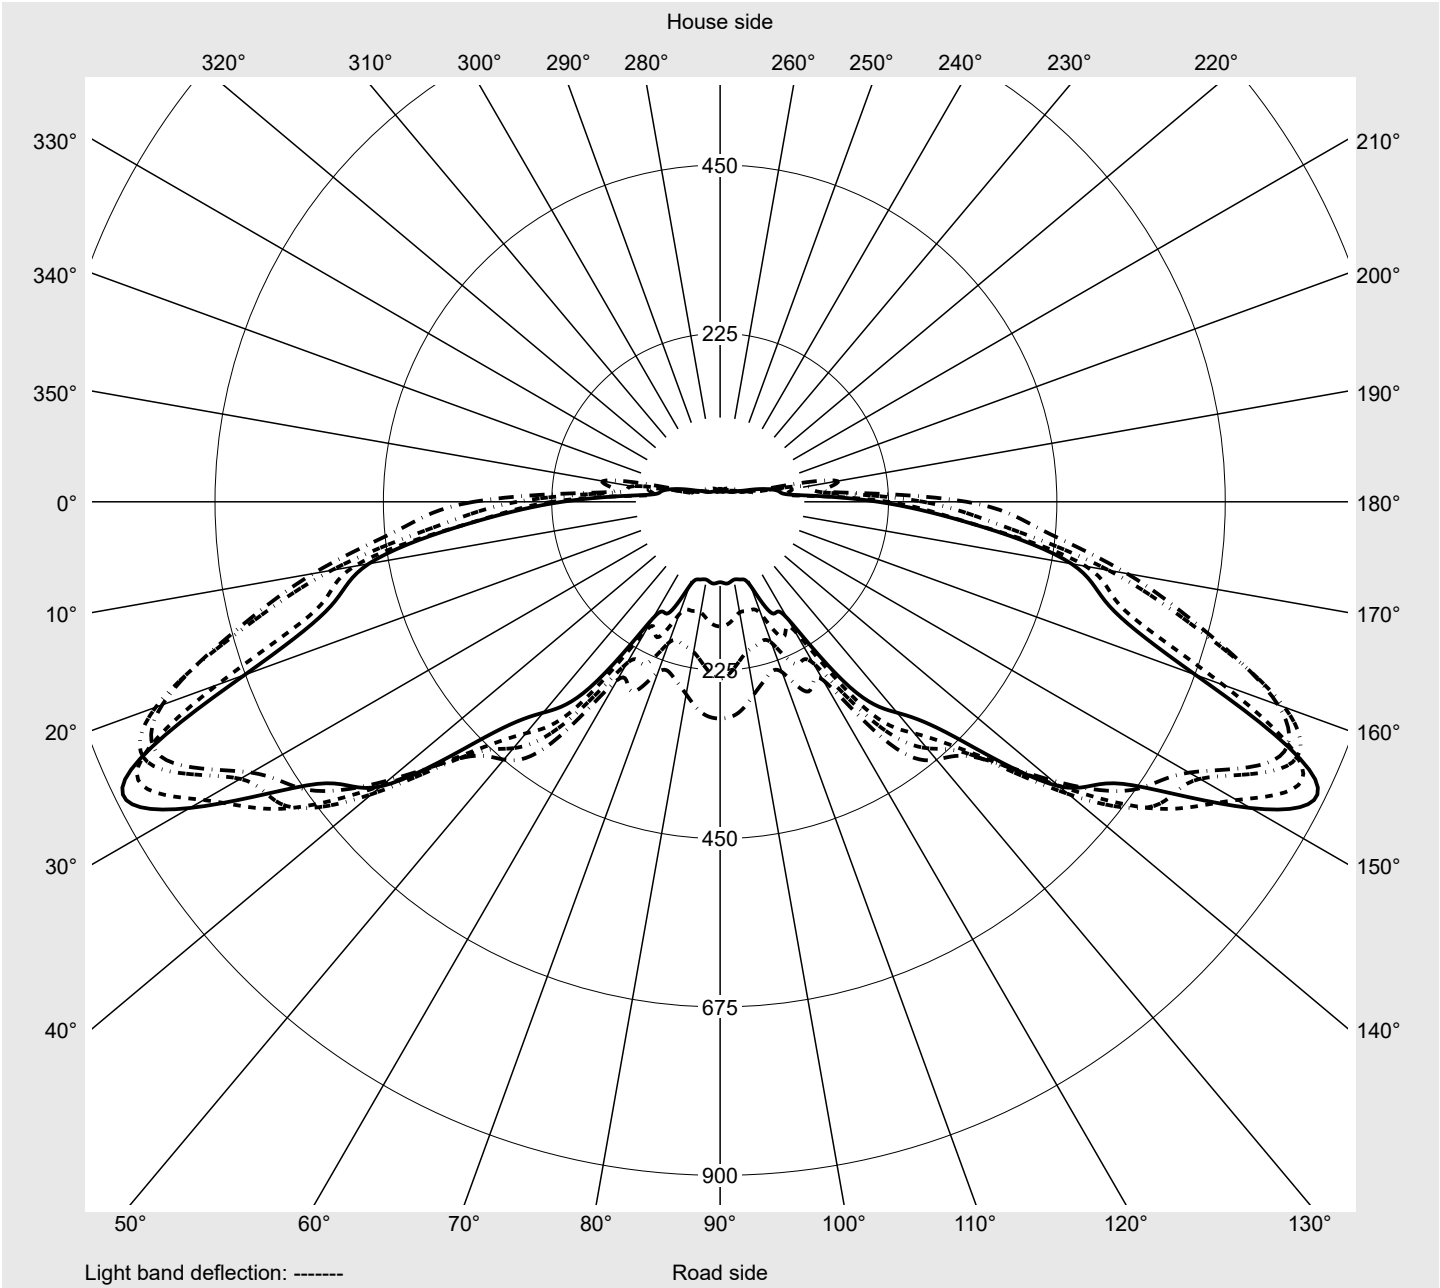

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245EV14H000022 EAN: 4058352023907	LP number 57124_66
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9
2,5°	25.6	25.6	26.0	26.3	26.7	27.0	27.8	28.5	29.2	29.9	30.6	31.0	31.0
5,0°	30.6	32.4	33.8	35.6	36.6	37.0	38.4	39.5	40.2	41.3	40.9	40.9	41.3
7,5°	50.5	52.7	52.3	54.4	57.6	57.3	60.8	60.8	63.0	64.8	64.0	62.3	60.8
10,0°	49.5	59.1	68.7	79.0	80.8	86.1	98.2	105.7	113.1	114.9	111.4	97.8	91.8
12,5°	97.8	107.8	118.5	122.7	135.9	136.3	137.7	141.3	142.7	139.1	132.7	126.3	127.4
15,0°	100.0	143.7	148.7	175.8	170.4	155.5	169.0	180.7	191.1	198.5	177.9	169.4	161.5
17,5°	166.5	142.7	153.3	183.6	190.7	188.6	181.1	197.8	204.6	205.6	213.8	191.8	191.4
20,0°	181.5	198.5	214.9	222.7	250.8	204.6	201.7	189.3	197.1	194.3	209.6	190.4	189.6
22,5°	212.8	232.7	239.1	227.0	232.3	214.9	209.2	198.9	202.4	192.1	217.7	204.6	200.3
25,0°	188.9	181.8	180.0	186.1	200.3	217.4	228.1	224.5	241.6	214.5	233.8	227.7	214.9
27,5°	180.4	192.5	208.9	217.0	225.9	230.2	243.4	233.4	258.7	229.8	233.0	209.6	210.3
30,0°	223.4	233.8	261.9	264.4	256.5	253.7	236.2	215.3	258.0	243.7	258.3	218.5	198.2
32,5°	224.5	218.5	217.7	200.0	216.7	239.1	189.6	151.2	167.9	160.8	192.5	194.3	189.6
35,0°	72.2	68.0	69.0	76.5	93.9	138.0	122.4	119.9	169.4	154.4	207.8	206.4	218.1
37,5°	82.2	94.3	127.4	148.7	170.1	189.3	213.8	209.2	227.7	215.6	250.8	232.7	228.8
40,0°	187.1	196.8	224.2	241.9	247.3	263.3	248.0	238.4	262.2	285.7	290.0	262.6	282.9
42,5°	268.3	270.4	285.3	287.5	285.3	295.3	306.7	303.8	309.9	355.1	380.7	328.8	354.0
45,0°	313.8	311.7	341.9	343.0	345.1	349.7	365.4	366.5	408.5	405.6	449.7	377.9	385.3
47,5°	341.9	355.8	408.5	418.1	428.7	416.3	429.1	412.7	450.8	447.9	474.6	405.2	396.0
50,0°	345.8	375.0	479.3	467.5	508.8	465.0	513.1	482.1	470.4	460.4	499.5	424.8	393.2
52,5°	344.4	375.0	472.9	499.9	572.1	559.3	587.1	558.2	487.8	474.6	496.7	424.8	377.5
55,0°	359.4	401.3	481.7	555.8	655.4	659.6	651.1	603.4	510.6	479.6	491.4	435.1	344.1
57,5°	364.3	436.9	523.4	618.4	746.5	756.4	705.9	629.4	542.6	489.2	474.3	410.2	322.0
60,0°	329.5	431.6	552.2	672.8	793.4	816.5	723.7	671.4	579.2	482.8	449.7	394.2	275.0
62,5°	271.5	381.8	527.3	662.8	802.7	835.4	740.4	708.4	607.7	479.6	429.8	360.1	249.1
65,0°	224.9	339.8	496.3	559.7	715.5	860.0	797.0	715.1	589.9	473.9	403.8	335.5	198.9
67,5°	211.3	338.7	476.8	538.7	676.0	877.4	818.3	657.2	591.3	445.5	367.9	302.4	180.0
70,0°	246.2	365.4	479.3	532.3	625.1	767.4	736.5	627.6	520.9	404.9	328.0	273.2	131.6
72,5°	258.0	381.1	446.2	523.7	619.8	683.5	682.8	547.9	417.3	335.5	262.6	219.2	120.6
75,0°	197.8	327.0	402.8	435.8	514.5	533.3	530.5	388.9	269.0	227.7	218.1	194.6	89.3
77,5°	149.1	227.7	250.1	290.3	323.4	309.2	292.1	207.8	175.4	164.4	160.1	159.0	91.1
80,0°	76.5	91.8	106.0	145.5	134.5	127.0	154.8	138.8	114.9	82.9	69.7	82.5	36.6
82,5°	44.5	48.4	53.0	80.8	65.8	54.8	77.6	95.7	74.0	50.9	31.0	23.1	16.0
85,0°	18.9	21.0	21.7	24.2	19.2	25.6	39.8	46.6	28.5	22.4	14.6	13.5	12.1
87,5°	12.8	13.2	13.2	14.2	15.3	16.7	21.7	18.5	17.4	14.6	11.7	11.4	10.7
90,0°	8.5	9.3	10.0	10.7	11.0	11.0	11.0	11.0	11.0	10.3	10.3	9.6	9.3
92,5°	8.5	9.3	9.6	10.3	10.3	10.7	10.3	10.3	10.3	10.0	9.6	9.6	9.3
95,0°	8.5	9.3	9.3	10.0	10.0	10.3	10.3	10.0	10.0	10.0	9.6	9.6	9.3
97,5°	8.5	8.5	9.3	9.3	9.6	10.0	10.0	9.6	9.3	9.3	9.3	9.3	9.3
100,0°	7.8	8.5	8.5	8.9	8.9	9.3	9.3	9.3	9.3	9.3	8.9	8.9	8.5
102,5°	7.1	7.8	7.8	8.2	8.2	8.5	8.5	8.5	8.2	8.5	8.5	8.5	8.5
105,0°	6.8	7.1	7.5	7.8	7.8	7.8	7.8	7.8	7.8	7.8	7.8	7.8	7.8
107,5°	6.4	6.4	7.1	7.1	7.1	7.5	7.5	7.1	7.1	7.8	7.5	7.5	7.8
110,0°	5.7	6.4	6.4	6.4	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1	7.1
112,5°	5.7	5.7	6.0	6.4	6.4	6.8	6.8	6.8	6.8	6.4	6.4	6.4	6.4

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245EV14H000022 EAN: 4058352023907	LP number 57124_66
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9
2,5°	31.3	31.3	31.7	31.7	31.3	31.3	25.3	25.3	24.9	24.5	24.5	24.2	24.2
5,0°	44.8	45.9	47.0	46.6	45.9	45.5	29.2	28.1	27.0	26.7	26.0	25.3	25.3
7,5°	59.4	61.2	67.6	74.4	82.5	85.4	45.2	40.2	35.6	31.7	28.8	26.7	24.9
10,0°	82.5	85.4	104.6	115.6	125.2	128.8	47.7	47.7	51.6	53.4	50.5	39.1	30.2
12,5°	127.4	134.8	154.4	169.0	181.8	188.6	73.3	79.3	69.7	52.7	43.1	30.2	34.2
15,0°	165.8	164.7	181.1	210.6	224.9	229.1	85.0	68.0	60.1	60.5	55.1	55.1	68.0
17,5°	195.7	195.0	207.8	239.4	253.3	256.9	139.1	80.4	103.9	89.7	84.7	64.4	75.4
20,0°	201.0	186.8	182.2	214.5	225.9	226.3	165.8	86.1	128.1	113.1	92.2	68.7	72.2
22,5°	211.7	188.2	169.4	187.9	196.0	197.1	187.1	103.9	144.1	119.9	103.5	81.1	65.8
25,0°	223.1	213.1	204.9	232.0	234.8	232.7	173.6	80.8	143.4	142.7	122.0	104.2	72.9
27,5°	232.0	219.5	211.7	243.0	251.2	249.8	142.7	59.8	132.7	119.5	120.6	89.3	65.8
30,0°	212.4	197.5	189.3	206.4	213.1	214.9	174.0	49.1	133.1	117.8	116.7	83.6	58.7
32,5°	188.9	183.2	185.0	190.7	181.1	172.9	173.3	70.8	154.4	120.3	103.9	71.5	44.1
35,0°	226.6	197.1	195.7	228.1	240.5	244.8	86.8	53.7	94.3	75.8	65.5	43.4	35.9
37,5°	243.0	237.0	249.1	295.0	310.6	314.5	73.6	52.7	53.0	49.5	43.1	33.1	27.0
40,0°	309.2	293.5	306.3	342.6	355.8	360.1	139.8	60.1	105.7	90.4	68.0	38.8	29.2
42,5°	378.9	335.5	336.6	371.1	377.9	380.7	176.1	104.2	145.9	114.9	67.6	38.8	35.9
45,0°	411.3	343.7	367.5	383.5	389.2	391.4	229.5	131.3	179.7	126.7	56.6	37.0	42.7
47,5°	414.9	355.8	373.6	385.0	389.2	390.7	193.9	137.7	183.9	108.9	44.5	37.7	45.5
50,0°	407.7	344.1	370.4	377.1	382.1	382.8	200.0	145.5	190.7	82.9	33.4	36.3	42.3
52,5°	373.2	325.6	354.0	363.3	371.8	372.9	195.3	145.9	184.7	62.3	34.9	36.3	38.4
55,0°	345.8	301.7	327.3	339.4	353.7	357.9	190.7	166.2	163.0	48.7	32.0	37.0	35.6
57,5°	312.4	274.0	292.8	307.4	324.8	330.9	182.5	150.5	115.6	43.8	29.9	33.8	32.0
60,0°	279.7	242.3	242.3	261.2	282.9	289.6	149.4	159.0	73.3	43.4	30.6	30.6	28.8
62,5°	239.4	200.3	196.8	203.9	222.4	236.2	141.3	119.2	54.1	38.4	31.3	28.5	25.6
65,0°	199.6	160.1	150.5	150.1	161.2	166.5	98.2	97.1	55.9	39.8	32.7	28.5	24.2
67,5°	164.4	120.3	107.5	105.7	109.6	107.5	103.5	80.1	65.5	48.4	35.6	28.8	23.1
70,0°	134.1	90.4	64.4	64.4	65.8	67.6	104.2	88.2	70.1	46.6	33.8	26.7	22.1
72,5°	102.8	71.5	44.5	39.5	38.4	39.8	124.5	88.6	61.6	40.2	35.6	26.7	21.3
75,0°	76.5	42.0	31.7	27.8	26.3	26.3	80.8	69.7	52.3	39.8	37.0	27.0	21.7
77,5°	57.6	27.8	23.1	21.0	19.9	19.9	71.5	51.9	40.9	37.4	31.3	25.6	21.0
80,0°	21.0	17.4	16.7	16.0	16.4	16.4	48.7	41.3	33.1	34.2	28.5	25.3	20.6
82,5°	14.2	13.2	13.2	12.8	13.5	13.5	31.0	28.8	24.2	24.5	23.1	19.9	16.7
85,0°	12.1	11.7	11.7	11.7	12.1	12.1	16.4	16.0	19.9	21.7	19.2	16.7	13.9
87,5°	10.7	10.7	10.7	10.7	11.4	11.4	12.5	11.7	13.2	14.2	12.1	11.7	11.0
90,0°	10.0	10.0	10.0	10.0	10.0	10.0	8.2	7.8	7.8	7.1	7.1	6.8	6.4
92,5°	9.3	10.0	10.0	10.0	10.0	10.0	7.8	7.8	7.8	7.1	7.1	7.1	6.8
95,0°	9.3	9.3	9.6	10.0	10.0	10.0	7.8	7.8	7.8	7.1	7.1	7.1	6.8
97,5°	9.3	9.3	9.3	9.3	9.6	10.0	7.8	7.8	7.5	7.1	7.1	7.1	6.8
100,0°	8.9	8.9	8.9	9.3	9.3	9.3	7.5	7.1	7.1	7.1	6.8	6.4	6.4
102,5°	8.5	8.5	8.5	8.5	8.9	8.5	7.1	6.4	6.4	6.4	6.4	6.4	5.7
105,0°	7.8	8.5	8.5	8.5	8.5	8.5	6.4	6.4	6.4	6.0	5.7	5.7	5.7
107,5°	7.8	7.8	7.8	7.8	7.8	7.1	6.0	5.7	5.7	5.7	5.0	5.0	5.0
110,0°	7.1	7.1	7.5	7.1	7.5	7.1	5.7	5.0	5.0	5.0	5.0	5.0	5.0
112,5°	6.8	7.1	7.1	7.1	6.8	5.0	5.0	5.0	5.0	5.0	5.0	5.0	4.3

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245EV14H000022 EAN: 4058352023907	LP number 57124_66
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	26.9	0.0	0.0
2,5°	23.8	23.1	22.4	22.4	21.7	21.7	21.7	21.3	21.3	21.0	21.3	0.3	0.4
5,0°	24.5	24.2	23.1	22.4	22.1	21.7	21.7	21.3	21.3	21.0	21.3	0.8	1.1
7,5°	24.2	23.5	22.4	21.7	21.7	21.3	21.3	21.3	21.0	21.0	20.6	1.6	2.7
10,0°	24.9	23.5	22.8	21.7	21.0	21.0	20.6	20.6	20.3	20.3	19.9	3.0	5.7
12,5°	39.8	39.8	31.0	24.9	22.1	21.3	20.3	19.9	19.6	19.6	19.2	5.2	11.0
15,0°	54.4	43.4	47.0	51.2	42.3	32.0	23.5	21.7	21.0	20.3	19.9	7.9	18.9
17,5°	64.4	53.4	45.2	41.6	37.7	35.6	39.5	34.2	29.2	23.8	20.6	10.7	29.6
20,0°	59.8	51.2	43.1	43.1	42.7	39.8	36.6	32.0	26.3	31.7	37.7	12.8	42.4
22,5°	56.2	43.1	40.2	39.1	39.5	38.1	38.4	37.0	31.7	36.3	41.3	14.7	57.2
25,0°	59.8	42.0	37.7	37.7	38.1	39.1	44.1	43.4	34.9	42.7	47.0	16.9	74.1
27,5°	51.6	43.4	39.8	39.8	39.8	41.3	42.7	40.2	35.9	38.4	40.6	18.7	92.8
30,0°	48.0	45.9	42.3	40.9	40.6	39.8	41.6	40.2	33.1	35.6	37.0	20.6	113.4
32,5°	48.0	51.6	51.2	49.5	45.5	41.3	39.1	36.3	30.6	31.7	33.4	19.5	132.8
35,0°	42.0	47.7	49.5	51.2	48.7	45.5	41.3	37.4	29.9	29.5	31.3	16.7	149.5
37,5°	28.8	38.1	44.1	49.1	48.7	45.9	43.1	39.5	31.0	29.9	32.7	21.5	171.0
40,0°	26.0	26.0	31.0	37.7	43.1	43.1	43.4	40.2	33.8	36.3	41.3	29.0	200.0
42,5°	34.5	28.1	24.9	24.2	29.2	34.2	37.7	37.0	35.6	38.8	41.3	36.3	236.3
45,0°	41.3	35.2	30.2	26.0	25.6	24.9	26.0	28.5	29.5	31.3	33.4	42.9	279.2
47,5°	41.6	35.2	31.3	28.8	27.8	24.2	22.8	22.4	21.7	23.1	24.2	48.0	327.2
50,0°	38.8	34.5	30.2	27.8	25.6	24.9	22.8	21.0	18.9	18.9	19.2	52.3	379.4
52,5°	35.6	32.0	29.2	26.7	25.3	22.8	21.3	20.3	19.2	19.6	20.6	55.4	434.8
55,0°	32.4	28.8	26.7	24.5	23.8	22.8	21.3	19.6	17.4	18.1	19.2	58.6	493.4
57,5°	29.2	26.3	23.8	22.4	22.1	21.3	20.3	18.5	17.1	17.4	17.8	61.1	554.5
60,0°	26.0	23.5	21.3	20.3	20.3	19.6	18.5	17.1	16.7	17.4	17.1	61.7	616.2
62,5°	23.1	21.0	19.6	18.9	18.5	18.1	17.1	15.3	15.7	16.0	16.4	59.9	676.0
65,0°	21.3	19.2	18.1	17.4	17.1	16.4	15.7	14.2	14.9	14.9	14.2	56.4	732.4
67,5°	20.3	18.5	17.4	16.7	16.0	14.9	14.2	13.5	13.9	13.5	13.5	54.1	786.5
70,0°	19.2	17.4	16.0	15.3	14.2	13.5	12.8	12.1	12.8	12.1	12.1	50.3	836.9
72,5°	18.5	16.0	14.6	13.9	12.8	12.1	11.4	11.0	11.0	10.7	10.7	46.1	883.0
75,0°	17.8	15.3	13.2	12.1	11.4	10.7	10.0	9.6	10.0	9.6	9.3	36.8	919.8
77,5°	17.1	14.2	11.7	11.0	10.3	9.6	8.9	8.5	8.5	8.5	8.5	24.9	944.7
80,0°	16.4	13.5	11.0	9.6	8.9	8.2	7.1	7.1	7.1	7.1	7.1	13.4	958.1
82,5°	14.6	11.7	9.6	8.2	7.5	6.8	6.0	5.7	5.7	5.0	5.0	7.9	966.0
85,0°	11.4	9.6	8.2	7.1	6.0	5.7	5.0	5.0	5.0	4.3	4.3	4.3	970.3
87,5°	9.3	7.8	6.8	6.0	5.3	5.0	4.3	4.3	4.3	3.6	3.6	3.0	973.3
90,0°	6.4	6.0	5.7	5.0	5.0	4.6	4.3	4.3	3.9	3.9	3.6	2.2	975.5
92,5°	6.4	6.4	6.0	5.7	5.3	5.3	5.0	5.0	4.3	4.3	4.3	2.2	977.7
95,0°	6.4	6.4	6.0	5.7	5.7	5.3	5.0	5.0	4.6	4.3	5.0	2.2	979.9
97,5°	6.4	6.0	6.4	6.0	5.7	5.3	5.0	5.0	4.3	4.3	4.3	2.1	982.0
100,0°	6.0	6.4	5.7	5.7	5.7	5.0	5.0	5.0	4.3	4.3	4.3	2.0	984.0
102,5°	5.7	5.7	5.7	5.0	5.0	5.0	4.3	4.3	4.3	3.9	4.3	1.9	985.9
105,0°	5.3	5.0	5.0	5.0	5.0	4.3	4.3	3.9	3.6	3.6	3.6	1.7	987.6
107,5°	5.0	5.0	4.3	4.3	4.3	3.9	3.6	3.6	2.8	2.8	2.8	1.6	989.1
110,0°	4.6	4.3	4.3	4.3	3.9	3.6	3.6	2.8	2.8	2.8	2.8	1.5	990.6
112,5°	4.3	4.3	4.3	3.9	3.6	3.6	3.2	2.8	2.8	2.8	2.1	1.3	991.9

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245EV14H000022 EAN: 4058352023907	LP number 57124_66
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4	6.4
117,5°	6.0	8.2	5.7	5.7	5.7	6.0	6.0	6.0	5.7	5.7	6.0	6.4	6.4
120,0°	5.0	5.0	5.0	5.0	5.3	5.7	5.3	5.3	5.3	5.3	5.7	5.7	5.7
122,5°	4.3	5.0	5.0	5.0	5.0	5.0	5.3	5.0	5.0	5.0	5.3	5.7	5.7
125,0°	4.6	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.6
127,5°	2.8	3.2	3.2	3.2	2.8	3.6	3.2	3.6	3.2	3.6	3.6	3.6	3.6
130,0°	2.5	2.8	2.5	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.5
132,5°	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1
135,0°	2.1	2.1	2.1	2.1	2.1	2.1	1.8	1.8	2.1	2.1	1.8	2.1	2.1
137,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
140,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
142,5°	1.4	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
145,0°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
147,5°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245EV14H000022 EAN: 4058352023907	LP number 57124_66 siteco
-------------------------------	--	-------------------------------------

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	6.4	6.4	6.8	7.1	5.7	2.8	5.0	5.0	5.0	4.6	4.3	4.3	4.3
117,5°	6.4	6.4	6.4	6.4	5.0	2.8	5.0	5.0	4.3	4.3	4.3	4.3	4.3
120,0°	5.7	5.7	5.7	5.7	4.3	2.1	4.3	4.3	4.3	4.3	4.3	4.3	3.6
122,5°	5.7	5.7	5.7	5.7	3.6	1.4	4.3	4.3	4.3	3.9	3.6	3.6	3.6
125,0°	5.0	5.0	5.0	5.0	2.8	1.4	3.6	3.6	3.6	3.6	3.6	3.6	3.6
127,5°	3.6	3.6	3.6	3.6	2.1	1.4	2.8	2.8	2.8	2.8	2.8	2.8	2.8
130,0°	2.5	2.5	2.1	2.1	1.4	1.4	2.5	2.1	2.8	2.1	2.1	2.1	2.1
132,5°	2.1	2.1	2.1	2.1	1.4	0.7	2.1	2.1	2.1	2.1	2.1	2.1	2.1
135,0°	2.1	2.1	1.8	1.4	1.1	0.7	2.1	2.1	2.1	2.1	2.1	2.1	2.1
137,5°	1.4	1.4	1.4	1.4	0.7	0.7	1.8	1.8	1.8	1.4	1.8	1.8	2.1
140,0°	1.1	1.4	1.4	0.7	0.7	0.7	1.4	1.4	1.4	1.4	1.4	1.4	1.4
142,5°	0.7	0.7	0.7	0.7	0.7	0.7	1.4	1.1	1.4	1.4	1.4	1.4	1.4
145,0°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	1.4	0.7	1.4
147,5°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	1.1
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	4.3	4.3	4.3	3.9	3.6	3.6	3.2	2.8	2.8	2.5	2.1	1.3	993.2
117,5°	4.3	4.3	3.6	3.6	3.6	3.6	2.8	2.8	2.8	2.1	2.1	1.2	994.4
120,0°	3.6	3.6	3.6	3.6	3.6	2.8	2.8	2.8	2.1	2.1	2.1	1.0	995.4
122,5°	3.6	3.6	3.6	3.6	3.2	2.8	2.8	2.8	2.1	1.8	1.4	1.0	996.4
125,0°	3.6	2.8	2.8	2.8	2.8	2.8	2.5	2.1	2.1	1.8	1.4	0.8	997.2
127,5°	2.8	2.8	2.8	2.8	2.5	2.5	2.1	2.1	1.8	1.4	1.4	0.6	997.9
130,0°	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	1.4	1.4	1.4	0.5	998.3
132,5°	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	1.4	1.4	1.4	0.4	998.7
135,0°	2.1	2.1	2.1	2.1	2.1	2.1	2.1	1.4	1.4	1.4	1.4	0.4	999.1
137,5°	1.8	1.8	1.8	1.8	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.3	999.4
140,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.1	1.4	0.7	0.2	999.6
142,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.1	1.1	1.1	0.7	0.7	0.2	999.8
145,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.1	0.7	0.7	0.7	0.7	0.1	999.9
147,5°	1.1	1.1	0.7	0.7	1.1	0.7	0.7	0.7	0.7	0.7	0.7	0.1	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245EV14H000022 EAN: 4058352023907	LP number 57124_66
Dimming levels table environmental temperature: 25°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	1370	10.7	11.1	10.9
95	241	252	1300	10.1	10.4	10.2
90	229	250	1235	9.6	9.9	9.8
85	216	248	1165	9.0	9.3	9.2
80	203	246	1095	8.5	8.8	8.6
75	190	243	1025	7.9	8.2	8.0
70	178	241	960	7.5	7.7	7.6
65	165	238	890	6.9	7.2	7.0
60	152	235	820	6.6	6.7	6.6
55	140	232	755	6.1	6.3	6.2
50	127	229	685	5.6	5.8	5.7
45	114	225	615	5.2	5.3	5.2
40	102	221	550	4.7	4.8	4.8
35	89	216	480	4.2	4.4	4.3
30	76	210	410	3.8	3.9	3.8
25	63	203	340	3.3	3.4	3.4
20	51	195	275	2.7	2.8	2.8
17	42	188	227	2.2	2.3	2.2