
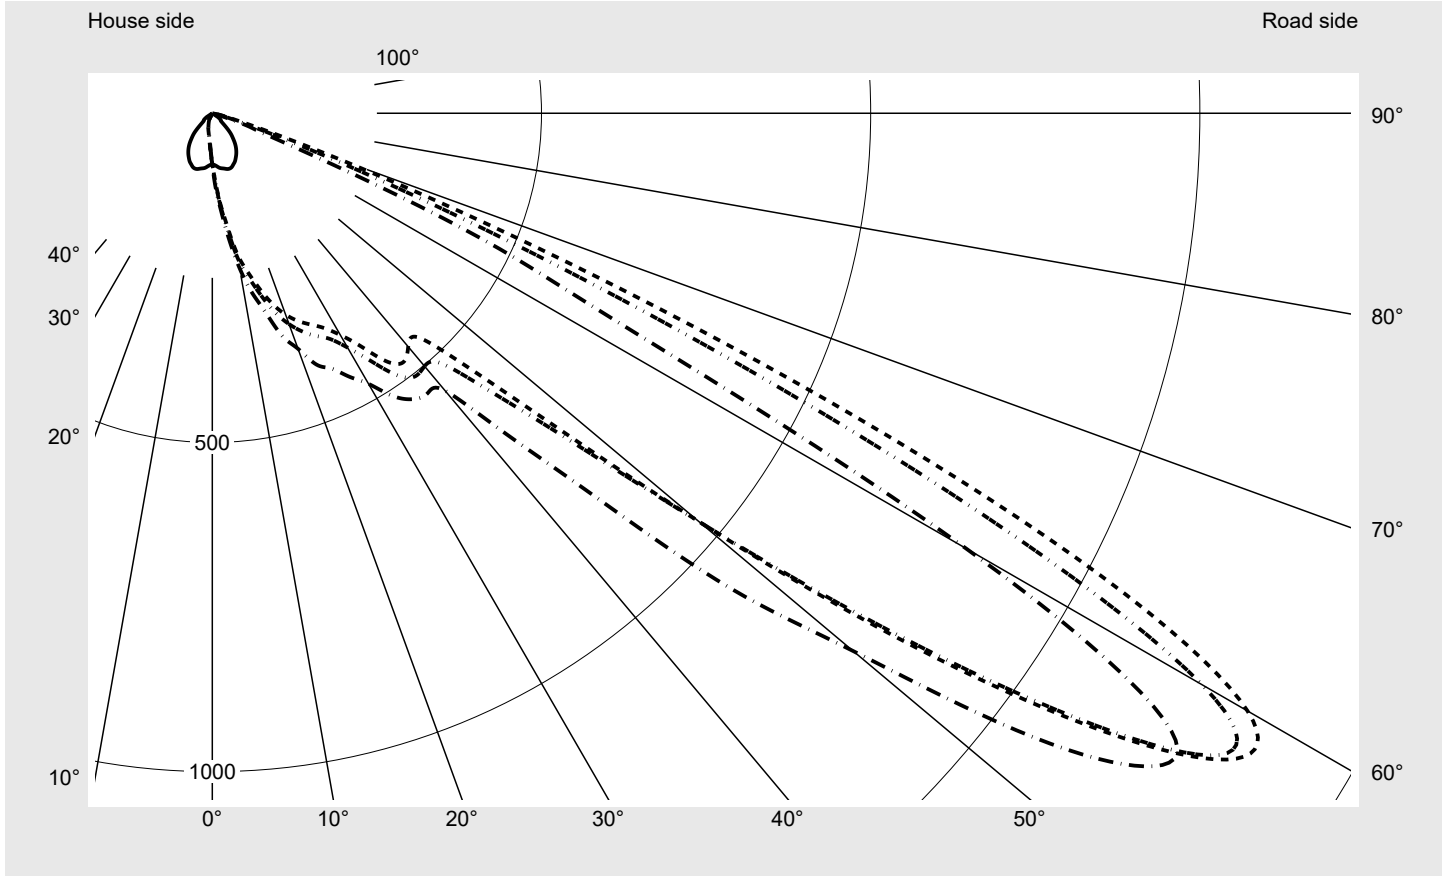


Photometric test report

Family Floodlight FL11	Order number: 5XA779115H01BA EAN: 4058352884935	LP number 59257_53
	Version standard bracket Optic asymmetric distribution PL33T with Back Light Control Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear ECG-DALI Rated values Ta = 10 °C Net luminous flux = 67260 lm Power consumption = 705.6 W Luminous efficacy = 95.3 lm/W	serial documentation 02.11.2023



Luminous intensity in cd/klm C180-0 C240-60 C245-65 C270-90 **Imax: 1827 cd/klm**



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	279.0
Imax 80°	8.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779115H01BA EAN: 4058352884935	LP number 59257_53
---	--	-------------------------------------

Envelope curve in cd/klm **KMK 57.5°** **KMK 55°** **KMK 52.5°** **KMK 50°** **siteco**

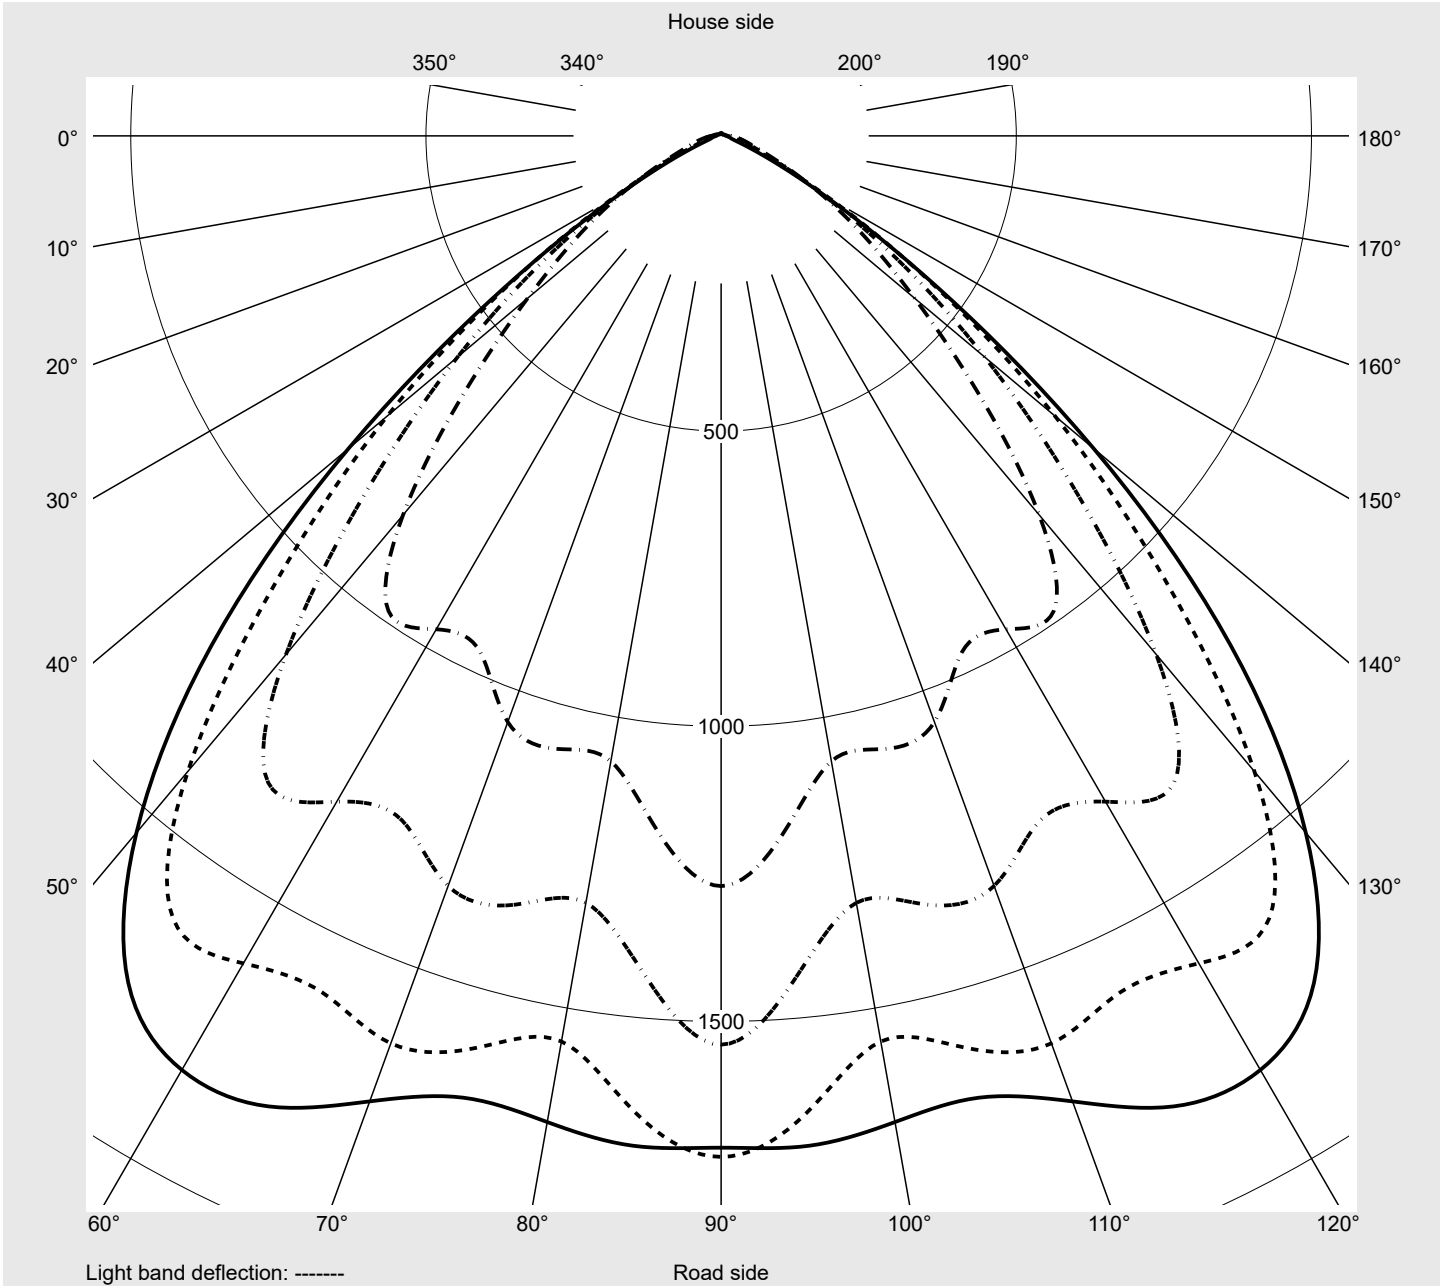

Photometric test report

Family Floodlight FL11	Order number: 5XA779115H01BA EAN: 4058352884935	LP number 59257_53
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6
2,5°	78.7	80.9	83.2	85.5	87.9	90.2	92.5	94.7	96.8	98.7	100.3	101.7	103.0
5,0°	81.0	85.9	91.1	96.3	101.7	106.8	111.9	116.8	121.5	125.9	130.1	133.8	137.2
7,5°	83.6	90.4	97.6	104.4	111.3	118.8	126.6	134.7	143.3	151.5	159.2	166.0	172.2
10,0°	85.0	93.4	102.2	112.3	123.9	136.3	148.9	161.9	174.6	186.3	197.0	206.8	216.2
12,5°	86.2	97.0	109.7	124.0	139.3	153.7	167.4	181.9	196.5	209.8	222.6	234.9	246.2
15,0°	87.7	100.9	115.8	132.0	147.8	163.1	179.8	198.2	215.3	231.3	246.7	261.5	275.2
17,5°	88.0	102.5	118.7	135.8	153.7	172.9	193.3	214.9	234.3	252.0	269.1	287.2	303.4
20,0°	86.8	102.5	120.0	138.8	159.2	181.7	205.9	229.0	248.3	266.7	286.7	307.2	325.5
22,5°	83.9	100.7	120.4	141.0	164.1	189.7	215.0	237.4	256.5	277.2	300.0	322.1	341.6
25,0°	81.0	98.7	119.7	142.3	167.0	193.6	218.5	239.8	261.7	285.3	309.5	332.5	354.2
27,5°	76.9	95.7	117.1	139.7	166.5	194.0	219.3	243.3	269.3	294.6	319.1	343.8	367.8
30,0°	72.6	91.8	112.3	135.8	164.6	194.3	222.7	251.6	282.1	309.9	335.5	362.4	388.9
32,5°	67.8	86.4	106.5	131.5	162.4	194.6	227.9	264.7	300.0	331.7	362.1	391.8	419.5
35,0°	62.3	79.9	100.0	125.5	156.6	193.0	233.1	277.3	318.4	357.3	393.6	428.5	459.5
37,5°	55.6	72.4	91.9	115.7	146.8	186.9	232.5	279.5	321.6	359.8	398.6	438.8	476.6
40,0°	48.1	63.8	82.2	103.6	133.9	179.0	230.4	276.2	310.9	343.2	379.9	420.0	462.9
42,5°	40.4	54.7	72.1	93.1	124.1	172.2	230.8	276.5	306.8	338.3	375.1	415.2	461.2
45,0°	28.5	39.1	53.5	74.9	107.3	161.3	226.4	277.5	311.4	364.8	435.7	495.8	538.7
47,5°	18.6	24.9	34.6	51.9	82.5	136.2	207.9	274.8	342.6	448.9	583.6	675.7	696.9
50,0°	16.9	24.4	35.1	48.6	70.6	115.0	191.5	295.6	427.8	615.6	838.2	982.4	965.1
52,5°	15.3	22.9	34.0	45.1	62.8	106.6	198.7	364.0	582.7	847.4	1146.7	1337.5	1302.2
55,0°	11.5	16.8	24.5	31.4	47.2	96.7	214.4	437.6	738.2	1063.3	1405.4	1618.5	1618.5
57,5°	8.2	10.7	14.5	18.4	31.5	79.5	202.9	448.3	823.7	1220.9	1540.7	1751.0	1827.0
60,0°	6.7	7.8	9.8	12.7	21.9	56.1	149.1	361.7	748.8	1177.8	1460.2	1699.7	1815.7
62,5°	6.1	6.9	8.4	10.6	15.5	34.4	88.1	222.4	499.7	869.7	1119.1	1425.2	1522.3
65,0°	5.7	6.3	7.5	9.1	11.8	22.2	51.1	117.7	270.5	520.5	769.3	1042.5	1025.9
67,5°	5.1	5.5	6.5	7.7	9.6	17.0	33.4	62.1	125.3	263.0	464.6	610.3	538.4
70,0°	4.5	4.9	5.5	6.2	7.7	11.0	16.8	26.2	47.4	102.5	209.4	279.0	215.6
72,5°	3.7	4.1	4.4	5.1	6.1	7.4	9.3	13.1	20.5	37.7	74.6	99.7	70.8
75,0°	3.0	3.2	3.5	4.1	4.9	6.3	7.2	9.1	12.2	17.4	28.3	36.6	27.1
77,5°	2.1	2.4	2.5	2.9	3.4	4.5	4.8	5.8	7.3	9.0	12.2	15.7	12.4
80,0°	1.5	1.9	1.9	1.9	2.2	2.6	2.9	3.5	4.0	5.0	7.3	8.4	6.1
82,5°	1.1	1.4	1.4	1.4	1.4	1.6	1.7	1.9	2.3	2.8	3.8	4.0	3.3
85,0°	0.6	0.8	0.8	0.6	0.7	0.8	0.9	1.0	1.0	1.2	1.5	1.7	1.6
87,5°	0.2	0.3	0.2	0.3	0.3	0.4	0.5	0.5	0.6	0.7	0.8	0.8	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779115H01BA EAN: 4058352884935	LP number 59257_53
Table of values for luminous intensities		Maximum luminous intensity

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6
2,5°	104.1	105.1	105.9	106.5	107.0	112.3	76.6	74.7	72.8	71.0	69.1	67.4	65.8
5,0°	140.3	143.0	145.3	147.1	148.3	146.7	76.4	72.2	68.4	64.8	61.5	58.4	55.7
7,5°	177.7	182.2	185.7	188.5	190.4	191.5	77.2	71.2	65.4	60.2	55.6	51.7	48.3
10,0°	224.4	230.9	235.3	238.4	240.5	239.0	77.0	69.7	62.6	56.0	50.0	45.4	41.5
12,5°	255.6	262.6	268.6	273.4	277.0	279.4	76.3	67.5	59.2	51.9	45.6	40.6	36.7
15,0°	286.7	296.0	303.7	309.5	313.4	313.3	75.2	64.9	56.5	48.6	41.5	36.0	32.0
17,5°	317.0	327.9	336.9	343.9	349.0	355.4	74.5	61.9	51.7	44.0	36.8	31.6	27.7
20,0°	340.8	353.5	364.8	373.4	379.7	380.7	72.2	59.2	48.8	39.8	32.2	27.3	24.0
22,5°	359.1	374.1	386.5	397.4	406.1	413.1	69.7	56.9	44.7	35.3	27.8	23.4	20.0
25,0°	373.2	389.3	403.5	416.3	425.0	427.8	66.5	53.0	40.9	31.3	24.2	19.5	16.5
27,5°	386.3	403.2	421.5	435.9	444.5	451.3	61.6	48.1	36.6	27.1	20.4	16.2	13.6
30,0°	411.0	431.7	450.0	463.4	472.8	474.6	56.4	43.3	32.3	23.5	17.2	13.7	11.6
32,5°	444.8	466.8	485.4	495.9	502.4	508.8	51.3	38.6	28.3	20.0	14.9	12.0	10.4
35,0°	484.4	504.1	515.2	522.8	527.6	530.1	46.0	34.1	24.3	17.1	13.1	10.8	9.4
37,5°	504.3	520.2	527.4	530.7	535.1	536.6	40.8	29.9	20.5	14.7	11.6	10.0	8.5
40,0°	501.6	525.3	535.5	542.1	547.5	550.1	35.2	25.6	17.5	12.9	10.6	9.4	7.9
42,5°	515.5	563.6	583.8	597.2	621.6	660.8	29.8	21.3	15.1	11.4	9.6	8.5	7.4
45,0°	597.2	675.0	705.3	720.2	788.4	826.2	22.0	17.2	13.2	10.4	8.8	7.5	6.6
47,5°	732.9	825.1	861.2	872.8	964.4	1068.6	15.1	12.6	10.9	9.3	8.1	6.8	6.0
50,0°	965.1	1056.6	1075.0	1075.7	1188.4	1270.7	12.9	10.8	9.4	8.0	7.0	6.1	5.3
52,5°	1279.2	1352.0	1348.1	1319.2	1433.7	1539.3	11.4	9.5	8.2	7.0	5.9	5.3	4.7
55,0°	1600.4	1635.8	1599.0	1557.7	1661.2	1729.4	9.2	8.1	7.1	6.3	5.3	4.6	4.2
57,5°	1813.9	1740.4	1686.7	1696.2	1717.1	1713.9	7.0	6.3	5.9	5.5	4.7	4.2	3.8
60,0°	1735.8	1537.9	1506.4	1585.6	1431.2	1321.6	6.0	5.4	5.2	4.7	4.2	3.9	3.7
62,5°	1317.0	1096.2	1102.2	1162.6	929.0	734.3	5.4	4.9	4.7	4.2	3.8	3.7	3.6
65,0°	787.3	613.8	652.3	654.1	523.1	453.2	5.1	4.7	4.4	4.0	3.7	3.6	3.5
67,5°	368.9	284.2	292.2	239.9	192.2	140.2	4.7	4.2	3.9	3.7	3.5	3.4	3.3
70,0°	132.6	123.6	117.9	81.6	62.4	60.8	4.3	3.9	3.6	3.4	3.3	3.3	3.3
72,5°	44.5	48.6	40.3	24.6	18.7	16.9	3.4	3.1	3.0	3.0	3.0	3.1	3.1
75,0°	20.0	21.0	14.3	9.3	9.1	10.9	2.6	2.2	2.1	2.3	2.5	2.6	2.8
77,5°	11.0	11.0	7.5	5.5	5.6	6.0	1.7	1.5	1.5	1.7	2.0	2.1	2.2
80,0°	5.1	5.1	4.3	3.5	3.5	4.0	1.2	1.1	1.1	1.2	1.4	1.6	1.7
82,5°	2.9	3.0	2.7	2.3	2.3	2.5	0.7	0.7	0.8	0.9	1.1	1.2	1.4
85,0°	1.4	1.4	1.4	1.4	1.3	1.4	0.5	0.5	0.6	0.7	0.9	1.0	1.1
87,5°	0.9	1.0	1.0	1.0	1.0	0.9	0.3	0.4	0.5	0.6	0.7	0.8	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779115H01BA EAN: 4058352884935	LP number 59257_53
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	77.6	0.1	0.1
2,5°	64.2	62.7	61.3	60.0	58.9	58.1	57.4	56.8	56.4	56.1	56.1	1.0	1.1
5,0°	53.1	50.8	48.8	47.1	45.7	44.5	43.6	42.9	42.5	42.1	42.0	2.1	3.2
7,5°	45.3	42.7	40.5	38.8	37.4	36.2	35.5	35.0	34.8	34.7	34.7	3.5	6.7
10,0°	38.5	36.1	34.1	32.6	31.2	30.3	29.8	29.7	29.8	29.8	29.9	5.3	11.9
12,5°	33.8	31.5	29.7	28.0	27.1	26.5	26.3	26.3	26.3	26.0	26.0	7.1	19.0
15,0°	29.3	27.2	25.3	24.1	23.4	23.1	22.9	22.8	22.8	22.8	22.6	9.1	28.2
17,5°	25.0	23.4	21.7	20.6	20.1	20.0	20.0	19.6	19.0	19.1	19.2	11.3	39.4
20,0°	21.4	19.5	18.3	17.7	17.5	17.5	17.1	16.4	16.3	16.2	16.2	13.4	52.9
22,5°	17.4	16.1	15.4	14.8	15.0	14.6	14.1	13.8	13.6	13.5	13.5	15.5	68.3
25,0°	14.5	13.4	12.5	12.4	12.2	11.8	11.5	11.2	11.0	10.9	10.9	17.4	85.7
27,5°	12.2	10.8	10.2	10.3	9.4	9.3	9.1	8.8	8.5	8.4	8.3	19.3	105.0
30,0°	10.4	9.1	9.0	8.2	7.9	7.6	7.4	7.2	6.9	6.7	6.7	21.6	126.6
32,5°	9.0	8.3	8.0	7.1	6.8	6.7	6.5	6.4	6.2	6.1	6.1	24.3	151.0
35,0°	8.2	7.9	6.9	6.6	6.3	6.1	6.0	5.9	5.8	5.8	5.8	27.2	178.2
37,5°	7.6	7.4	6.4	6.1	5.9	5.8	5.7	5.7	5.6	5.6	5.6	29.0	207.2
40,0°	7.1	6.4	6.0	5.6	5.5	5.4	5.4	5.3	5.3	5.3	5.2	30.1	237.2
42,5°	6.7	5.8	5.3	5.1	5.0	5.0	5.0	5.0	5.0	5.0	5.0	32.6	269.8
45,0°	6.0	5.3	4.8	4.7	4.7	4.7	4.7	4.8	4.8	4.7	4.7	38.5	308.3
47,5°	5.2	4.7	4.4	4.3	4.4	4.5	4.5	4.6	4.6	4.6	4.6	47.6	356.0
50,0°	4.6	4.1	4.0	4.1	4.1	4.2	4.4	4.4	4.5	4.5	4.5	62.6	418.5
52,5°	4.1	3.8	3.7	3.8	3.9	4.1	4.3	4.4	4.4	4.5	4.5	82.5	501.1
55,0°	3.8	3.5	3.6	3.7	3.9	4.1	4.3	4.5	4.5	4.6	4.6	101.9	602.9
57,5°	3.5	3.4	3.5	3.7	3.9	4.1	4.4	4.7	4.8	4.8	4.9	112.8	715.8
60,0°	3.4	3.2	3.4	3.6	3.8	4.1	4.5	4.8	5.0	5.1	5.1	105.9	821.7
62,5°	3.3	3.1	3.2	3.4	3.7	4.0	4.4	4.8	5.2	5.3	5.4	80.2	901.9
65,0°	3.2	3.2	3.3	3.5	3.8	4.1	4.5	4.8	5.1	5.3	5.3	51.0	952.9
67,5°	3.3	3.5	3.8	4.1	4.3	4.6	4.8	5.1	5.3	5.4	5.4	25.8	978.7
70,0°	3.4	3.8	4.3	4.6	4.9	5.1	5.2	5.4	5.6	5.6	5.7	11.2	989.9
72,5°	3.4	3.9	4.2	4.5	4.8	5.1	5.3	5.4	5.6	5.7	5.7	4.5	994.4
75,0°	3.1	3.7	4.0	4.3	4.6	4.9	5.1	5.3	5.4	5.5	5.6	2.3	996.6
77,5°	2.5	2.9	3.2	3.5	3.8	4.1	4.3	4.5	4.6	4.7	4.7	1.4	998.0
80,0°	1.9	2.2	2.5	2.7	3.0	3.2	3.4	3.6	3.7	3.8	3.9	0.9	998.8
82,5°	1.5	1.7	1.9	2.1	2.3	2.5	2.7	2.9	3.0	3.1	3.1	0.6	999.4
85,0°	1.2	1.4	1.5	1.7	1.8	2.0	2.2	2.3	2.4	2.5	2.5	0.4	999.8
87,5°	1.0	1.1	1.3	1.4	1.5	1.6	1.8	1.9	2.0	2.0	2.1	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779115H01BA EAN: 4058352884935	LP number 59257_53
----------------------------------	--	------------------------------

siteco

Dimming levels table environmental temperature: 10°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
99	251	254	66669	696.9
95	237	251	63917	657.0
90	221	249	60528	611.3
85	205	246	57081	566.3
80	190	243	53713	524.1
75	176	241	50399	484.9
70	162	238	47022	446.1
65	149	234	43754	410.6
60	135	231	40296	371.5
55	123	227	37118	338.8
50	110	223	33582	303.3
45	98	219	30266	270.7
40	86	214	26907	237.7
35	74	209	23404	205.3
30	63	203	20166	176.0
25	52	196	16831	146.8
20	41	187	13430	117.7
15	30	176	10036	89.1
10	20	161	6807	63.0
5	9	132	3235	34.6
2	3	91	1253	18.1

Dimming levels table environmental temperature: 25°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
95	----	----	----	----
90	----	----	----	----
86	205	246	55351	562.0
85	203	246	54923	556.3
80	188	243	51718	514.4
75	173	240	48369	472.7
70	159	237	45173	433.9
65	146	234	42014	398.1
60	132	230	38652	359.9
55	120	227	35578	327.4
50	107	222	32149	292.2
45	96	219	29177	262.5
40	84	214	25896	229.9
35	72	208	22495	197.8
30	61	202	19279	168.8
25	50	195	16007	140.0
20	40	186	12963	113.8
15	29	175	9615	85.5
10	19	159	6423	59.7
5	9	132	3206	34.2
2	3	92	1243	17.9

Photometric test report

Family Floodlight FL11	Order number: 5XA779115H01BA EAN: 4058352884935	LP number 59257_53
---	--	-------------------------------------

Luminousfluxs table **siteco**

Temperature °C	Luminous flux lm	Power consumption W
10.0	67260.0	705.6
25.0	55550.0	564.6