
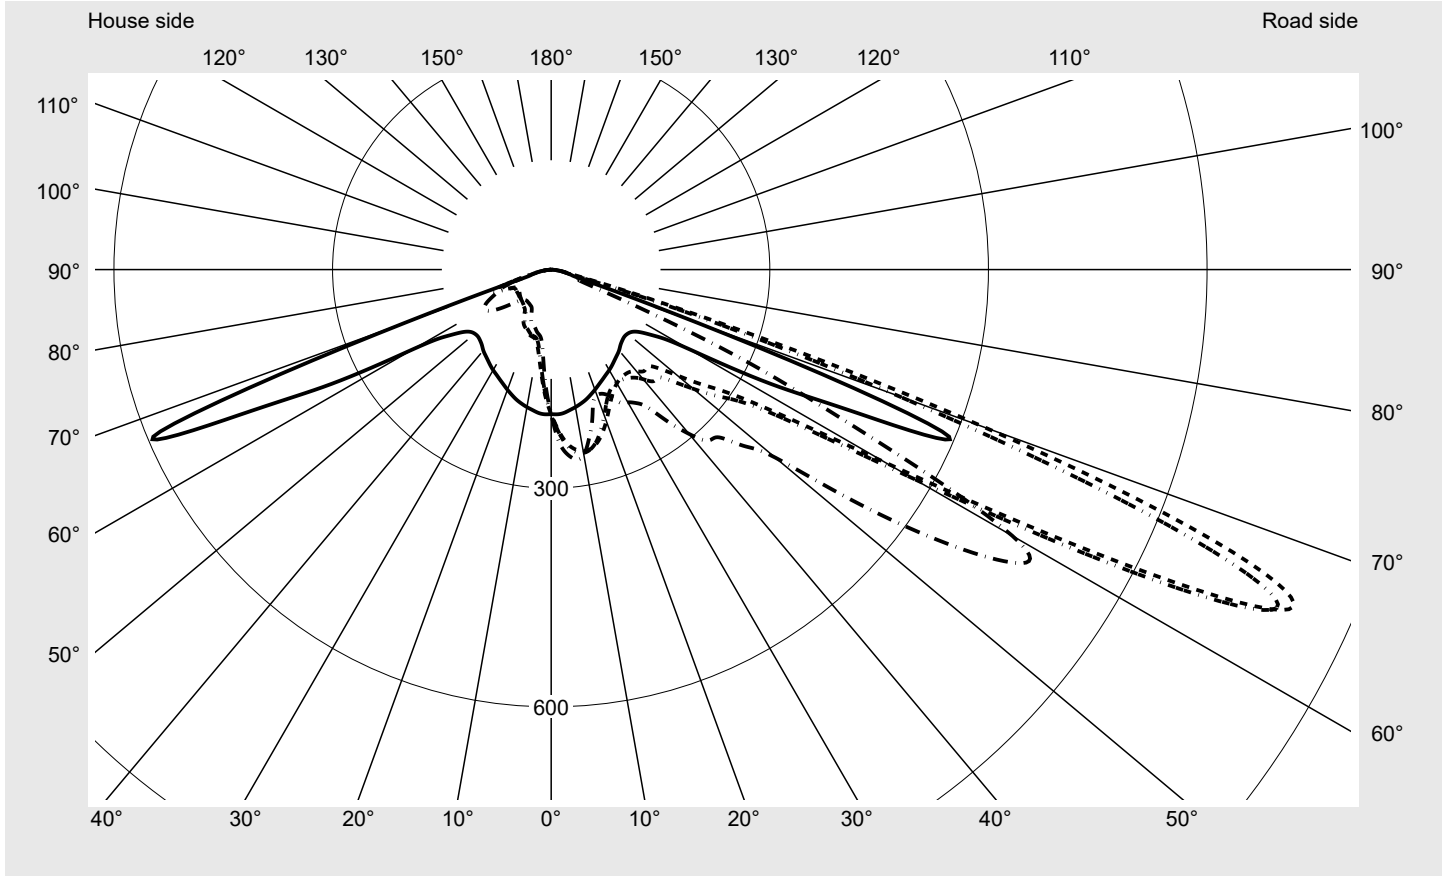


Photometric test report

Family Floodlight FL11 	Order number: 5XA779117D01AA EAN: 4058352689714	LP number 59241_45
	Version standard bracket Optic asymmetric distribution PL52 Cover toughened safety glass Lamps LED 5000 K CRI ≥ 70 Controlgear ECG-DALI Rated values Ta = 10 °C Net luminous flux = 118160 lm Power consumption = 967.3 W Luminous efficacy = 122.2 lm/W	serial documentation 02.11.2023



Luminous intensity in cd/klm C180-0 C220-40 C225-45 C270-90 **Imax: 1105 cd/klm**



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	749.2
Imax 80°	33.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779117D01AA EAN: 4058352689714	LP number 59241_45
---	--	-------------------------------------

Envelope curve in cd/klm **KMK 65°** **KMK 62,5°** **KMK 60°** **KMK 57,5°** **siteco**

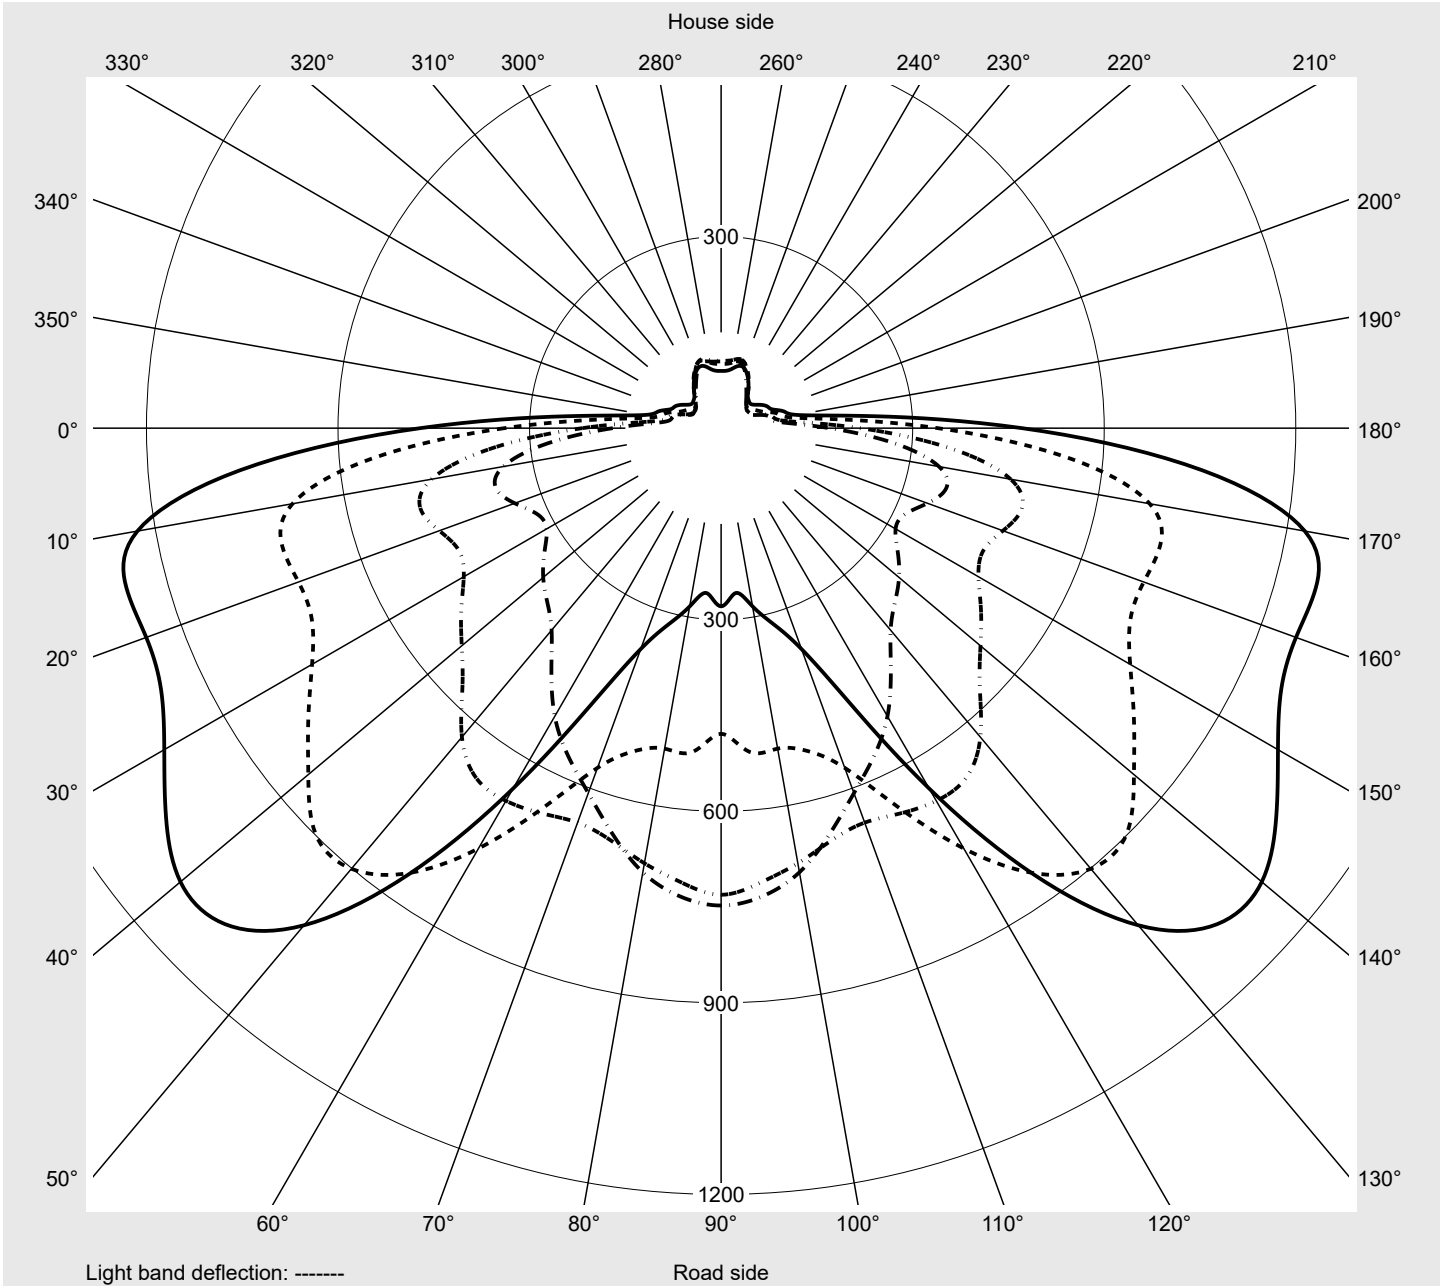

Photometric test report

Family Floodlight FL11	Order number: 5XA779117D01AA EAN: 4058352689714	LP number 59241_45
---	--	-------------------------------------

siteco

Table of values for luminous intensities Maximum luminous intensity

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4
2,5°	198.7	201.8	204.8	207.9	210.5	213.1	215.6	218.0	220.0	222.1	223.9	225.2	226.6
5,0°	197.5	203.9	210.1	215.9	221.0	226.1	230.5	234.7	238.2	241.5	244.4	246.7	248.8
7,5°	194.5	204.0	212.8	220.8	227.9	234.4	239.8	244.7	248.5	251.9	254.7	256.6	258.2
10,0°	191.6	203.6	214.7	224.5	232.6	239.7	245.3	249.8	253.0	255.4	256.9	257.5	257.7
12,5°	188.3	202.7	215.6	226.6	235.2	242.2	247.1	250.3	251.7	252.0	251.1	249.3	247.1
15,0°	184.6	201.1	215.3	227.2	236.0	242.1	245.5	246.5	245.4	242.6	238.7	234.1	229.5
17,5°	180.1	198.7	214.3	226.4	234.7	239.4	240.6	238.8	234.4	228.4	221.6	215.0	208.9
20,0°	175.5	196.0	212.6	225.0	232.3	235.0	233.5	228.5	221.2	212.9	204.8	197.9	192.3
22,5°	170.8	193.2	210.9	223.1	229.2	229.5	225.0	216.9	207.2	198.1	190.9	186.0	183.2
25,0°	166.5	190.8	209.5	221.4	226.0	223.6	216.2	205.7	195.3	187.5	183.1	181.8	182.9
27,5°	162.6	188.9	208.7	220.2	223.0	217.9	207.4	195.5	186.2	181.2	181.1	184.8	190.2
30,0°	159.3	187.6	208.7	219.9	220.9	213.2	200.6	188.1	180.3	178.9	183.9	192.4	200.6
32,5°	155.6	186.4	208.9	219.9	219.2	209.1	195.1	182.6	176.9	179.4	188.7	200.9	210.7
35,0°	151.7	185.0	209.5	220.7	218.2	205.8	190.5	178.9	176.0	182.1	194.6	208.8	219.8
37,5°	148.2	184.6	210.6	222.0	217.8	203.0	187.2	177.0	177.0	186.9	202.3	219.6	234.1
40,0°	144.9	183.9	212.1	223.7	218.0	202.1	186.1	178.0	182.1	196.4	216.1	237.1	256.9
42,5°	140.7	183.2	213.9	225.3	218.0	200.6	184.8	179.7	188.7	207.7	230.6	252.9	273.8
45,0°	137.8	184.0	217.3	228.0	217.6	196.8	179.6	176.1	187.8	209.2	234.2	258.2	278.2
47,5°	136.2	188.2	224.9	235.1	222.0	198.5	182.2	183.4	200.9	227.5	253.2	274.4	292.0
50,0°	136.9	195.8	237.5	249.0	234.0	209.5	195.4	202.1	226.1	254.5	277.3	293.1	307.0
52,5°	140.3	208.3	256.9	270.1	254.2	229.3	218.2	230.9	257.7	284.1	301.5	311.8	324.9
55,0°	150.0	230.6	289.0	303.9	285.4	259.2	250.9	267.2	293.3	315.0	328.7	342.9	377.4
57,5°	169.9	272.7	346.5	364.8	343.9	318.1	315.5	337.7	363.8	385.1	413.0	463.4	521.0
60,0°	217.5	360.1	460.5	487.4	469.7	453.2	465.4	496.9	530.3	572.9	631.6	668.8	674.0
62,5°	339.5	549.8	681.6	711.7	704.4	707.4	739.7	789.2	844.0	898.4	900.8	850.3	760.1
65,0°	471.4	756.3	928.3	964.4	958.1	967.9	1007.0	1061.4	1105.4	1098.6	1016.3	853.0	651.7
67,5°	580.5	784.3	996.7	1047.0	1038.0	1032.0	1044.8	1049.4	1010.6	915.8	763.6	561.5	403.9
70,0°	214.6	443.1	619.1	717.7	749.2	739.5	731.6	704.1	633.2	506.4	378.9	314.3	250.3
72,5°	47.8	71.8	92.0	126.4	207.8	269.5	281.4	276.1	237.2	192.6	177.4	155.1	127.9
75,0°	28.7	31.6	33.7	36.4	44.1	64.2	72.8	73.1	64.5	40.1	61.7	56.1	51.5
77,5°	21.1	22.2	23.2	24.3	26.0	28.7	29.0	28.1	26.6	26.4	28.3	28.1	28.6
80,0°	16.3	15.8	15.8	16.5	17.1	18.1	17.9	17.5	17.5	17.8	17.8	18.0	22.8
82,5°	10.4	9.7	9.8	10.2	10.3	10.5	10.7	10.3	10.3	10.3	10.1	10.1	11.6
85,0°	5.3	4.8	4.8	4.9	4.9	5.0	4.9	4.8	4.6	4.3	4.2	4.0	3.9
87,5°	1.8	1.8	1.8	1.8	1.7	1.6	1.5	1.4	1.3	1.3	1.3	1.3	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779117D01AA EAN: 4058352689714	LP number 59241_45
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4
2,5°	227.8	228.9	229.7	230.2	230.5	235.4	195.7	192.6	189.5	186.4	183.3	180.4	177.7
5,0°	250.5	251.8	252.8	253.5	254.0	254.3	191.1	184.3	177.5	171.0	164.5	158.5	153.0
7,5°	259.5	260.4	261.0	261.4	261.7	262.5	184.9	174.8	164.9	155.3	146.2	138.0	130.6
10,0°	257.6	257.2	256.7	256.3	256.1	258.1	179.0	165.9	153.2	141.4	130.7	121.5	113.7
12,5°	244.8	242.5	240.5	239.0	238.3	238.7	172.8	157.2	142.3	129.2	118.1	109.5	103.1
15,0°	225.2	221.2	218.1	215.8	214.7	216.7	166.7	148.8	132.7	119.2	109.2	102.4	98.4
17,5°	203.8	199.6	196.5	194.5	193.6	191.8	159.7	140.2	123.3	110.8	102.7	98.4	96.4
20,0°	188.3	185.5	183.8	182.9	182.7	183.4	153.1	132.2	115.3	104.2	98.4	96.1	94.5
22,5°	181.8	181.2	181.4	182.1	183.0	184.5	146.4	124.6	108.3	99.1	95.4	93.6	91.3
25,0°	184.8	186.5	188.3	190.5	192.4	192.4	140.5	118.0	102.8	95.7	93.1	90.8	88.2
27,5°	194.5	196.9	199.1	202.3	204.3	206.0	134.7	111.9	98.3	92.9	90.5	87.9	85.5
30,0°	205.5	206.3	207.7	211.1	211.7	210.4	129.5	106.9	94.7	90.7	88.0	85.6	81.4
32,5°	214.6	214.1	215.3	219.3	217.5	217.2	124.3	101.9	91.5	88.2	85.5	82.6	74.4
35,0°	224.3	225.8	231.4	237.6	233.6	230.9	118.8	97.1	88.5	85.5	81.9	75.5	67.3
37,5°	242.5	248.6	257.2	261.7	261.4	262.9	113.6	92.6	85.7	83.0	75.6	67.8	63.3
40,0°	269.5	277.8	286.8	292.2	294.3	294.4	108.8	88.8	83.0	80.1	67.9	62.7	61.4
42,5°	288.1	296.4	305.4	312.4	315.9	318.3	103.7	85.1	80.7	76.5	62.5	60.1	59.5
45,0°	292.4	300.4	310.5	319.5	324.1	325.6	99.1	81.9	78.6	73.3	59.5	58.0	57.6
47,5°	307.0	315.2	326.9	341.7	349.2	358.0	95.5	79.4	76.9	70.2	57.2	56.1	56.1
50,0°	321.7	336.5	356.9	382.5	399.0	401.3	92.9	77.8	75.5	67.2	54.8	54.3	54.6
52,5°	349.2	386.2	431.6	478.4	507.7	518.9	91.7	76.8	74.7	64.5	52.7	52.4	52.9
55,0°	434.8	497.1	555.8	609.9	642.5	646.0	93.1	77.2	74.5	62.1	51.1	50.6	51.3
57,5°	566.7	608.2	657.7	706.3	736.2	747.6	99.1	79.8	75.3	60.4	50.3	49.1	49.8
60,0°	665.6	657.4	668.3	691.9	714.2	730.8	115.8	86.0	79.0	63.0	52.8	49.8	49.2
62,5°	654.2	566.1	523.5	509.6	508.8	478.7	166.6	102.4	89.9	74.1	64.4	58.1	53.1
65,0°	473.0	368.1	318.0	283.4	259.2	279.0	220.3	119.6	101.5	85.7	80.1	72.9	63.9
67,5°	303.2	234.6	127.7	94.1	83.6	72.6	142.4	96.1	89.7	82.1	80.7	77.1	70.6
70,0°	193.4	146.5	58.3	44.8	44.0	44.3	56.4	49.2	49.6	52.8	55.7	59.0	59.5
72,5°	97.7	77.0	42.5	37.4	37.6	37.8	32.8	32.2	32.2	33.2	34.5	37.6	39.2
75,0°	45.7	41.4	34.4	32.5	31.6	32.6	25.8	25.7	25.6	26.2	27.0	28.4	30.1
77,5°	30.7	31.6	27.6	23.6	22.4	21.6	20.5	19.9	19.4	20.0	20.3	21.3	22.5
80,0°	33.4	29.1	19.0	15.7	14.8	15.4	16.2	14.2	13.7	14.1	14.3	14.8	15.0
82,5°	15.5	14.5	10.2	8.8	8.3	8.3	9.7	8.6	8.7	8.8	9.0	8.8	8.7
85,0°	3.8	3.6	3.5	3.4	3.4	3.6	4.5	4.4	4.4	4.4	4.3	4.1	3.9
87,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.8	1.8	1.8	1.7	1.7	1.6	1.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779117D01AA EAN: 4058352689714	LP number 59241_45
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	198.4	0.3	0.3
2,5°	175.3	172.9	170.7	168.9	167.2	165.8	164.6	163.7	163.1	162.5	162.7	2.4	2.7
5,0°	147.8	143.2	139.0	135.4	132.4	129.7	127.5	125.9	124.7	124.0	123.9	4.6	7.3
7,5°	124.0	118.4	113.7	109.9	106.8	104.4	102.6	101.3	100.4	99.8	99.6	6.7	13.9
10,0°	107.5	102.7	99.2	96.7	95.0	93.7	92.9	92.3	91.9	91.6	91.5	8.6	22.5
12,5°	98.7	95.8	94.0	92.7	91.7	90.8	90.0	89.3	88.8	88.4	88.2	10.4	32.9
15,0°	96.0	94.3	92.8	91.0	89.2	87.6	86.2	85.2	84.3	83.8	83.6	11.8	44.7
17,5°	94.9	92.9	90.4	88.0	85.9	84.1	82.6	81.5	80.7	80.1	79.9	13.0	57.8
20,0°	92.4	89.9	87.5	85.5	83.6	81.9	80.4	79.2	78.5	78.0	77.8	14.2	72.0
22,5°	88.9	86.9	85.1	83.6	81.4	77.6	75.0	73.4	72.6	72.2	72.0	15.3	87.3
25,0°	86.1	84.2	82.4	78.8	74.1	69.7	66.1	64.7	64.0	63.6	63.4	16.5	103.8
27,5°	82.2	78.7	74.9	70.8	66.1	63.3	61.7	60.3	59.2	58.5	58.2	17.8	121.5
30,0°	75.0	70.4	67.7	65.0	63.5	62.1	60.4	58.9	57.8	57.0	56.7	19.1	140.7
32,5°	67.2	65.2	64.1	63.1	62.1	60.8	59.3	57.9	56.7	56.0	55.6	20.5	161.2
35,0°	64.0	63.3	62.4	61.6	60.9	59.8	58.5	57.2	56.2	55.4	55.0	22.1	183.2
37,5°	62.5	61.7	61.0	60.3	59.8	59.1	57.9	56.7	55.7	54.8	54.4	24.0	207.2
40,0°	60.8	60.3	59.7	59.3	59.0	58.5	57.8	57.0	56.2	55.3	54.8	26.3	233.5
42,5°	59.2	59.0	58.8	58.6	58.6	58.5	58.4	58.3	57.9	57.0	56.3	28.4	261.9
45,0°	57.9	58.2	58.3	58.5	58.8	59.5	60.4	61.2	61.4	60.6	59.9	29.9	291.8
47,5°	56.9	57.7	58.4	59.0	60.2	62.1	64.4	66.4	67.2	66.9	66.3	32.5	324.2
50,0°	55.7	57.2	58.7	60.5	63.0	66.5	71.0	74.6	76.0	76.1	75.8	36.1	360.3
52,5°	54.5	56.6	59.2	62.5	67.0	73.2	80.5	85.6	87.0	87.1	86.9	41.8	402.1
55,0°	53.2	56.1	60.0	65.4	72.4	81.8	91.8	97.7	97.9	97.6	97.6	50.1	452.3
57,5°	52.1	56.0	61.4	68.9	78.7	90.8	102.4	107.7	106.0	104.7	104.5	61.7	514.0
60,0°	51.3	55.7	62.6	72.2	83.7	96.6	108.4	112.2	108.5	106.0	105.6	76.9	590.9
62,5°	52.3	56.2	63.8	74.5	86.6	98.6	108.3	109.7	104.4	101.2	100.6	94.5	685.4
65,0°	59.7	61.2	65.1	74.3	85.2	94.9	101.5	100.6	94.0	90.2	89.6	105.6	791.0
67,5°	70.8	76.7	70.4	71.4	78.8	84.4	87.9	86.4	81.3	78.6	78.3	95.5	886.4
70,0°	69.5	84.7	76.7	65.7	68.6	73.5	76.3	74.7	70.1	67.6	67.4	61.9	948.4
72,5°	47.4	61.9	61.1	56.0	57.7	60.7	61.9	59.8	55.2	53.4	54.3	24.8	973.2
75,0°	31.9	36.3	40.3	42.5	47.6	45.9	45.5	43.5	40.1	38.7	40.0	10.9	984.1
77,5°	23.8	26.0	28.0	29.4	31.1	32.7	33.1	31.2	28.5	27.1	28.0	7.0	991.0
80,0°	15.7	16.7	17.9	18.7	18.9	19.5	19.8	18.6	17.3	16.5	16.4	4.8	995.8
82,5°	8.8	9.1	9.6	9.4	9.7	10.0	9.5	8.6	7.8	7.4	7.3	2.7	998.5
85,0°	3.9	3.8	3.7	3.5	3.2	2.9	2.8	2.8	2.7	2.7	2.7	1.1	999.6
87,5°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.5	1.5	1.5	1.5	0.4	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779117D01AA EAN: 4058352689714	LP number 59241_45
----------------------------------	--	------------------------------

siteco

Dimming levels table environmental temperature: 10°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	118160	967.3
95	231	251	112116	876.8
90	213	248	106511	806.3
85	196	245	100525	739.7
80	180	241	94335	677.6
75	166	238	88579	623.4
70	152	235	82573	569.5
65	139	232	76716	519.9
60	127	229	71126	474.5
55	114	225	64908	425.5
50	102	221	59086	380.4
45	91	216	53348	339.7
40	80	212	47497	298.9
35	69	206	41498	258.4
30	58	200	35370	217.4
25	48	193	29708	181.4
20	38	184	23808	145.4
15	28	173	17843	109.8
10	18	157	11737	74.4
5	9	132	6105	42.9
1	2	77	1645	17.2

Dimming levels table environmental temperature: 25°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	---	---	---	---
95	---	---	---	---
94	223	249	105783	839.7
90	208	247	101367	780.8
85	191	244	95730	714.8
80	176	241	90237	656.7
75	161	237	84279	598.8
70	148	234	78916	549.4
65	135	231	73261	500.2
60	122	227	67418	451.6
55	110	223	61708	407.1
50	99	220	56510	365.7
45	87	215	50431	321.7
40	77	210	45205	284.9
35	66	205	39352	244.3
30	56	199	33802	208.0
25	46	192	28187	172.3
20	36	183	22373	136.7
15	27	172	17094	105.1
10	17	155	11042	70.0
5	8	127	5443	38.9
1	2	77	1632	17.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779117D01AA EAN: 4058352689714	LP number 59241_45
---	--	-------------------------------------

Luminousfluxs table



Temperature °C	Luminous flux lm	Power consumption W
10.0	118160.0	967.3
25.0	105800.0	839.9