


Photometric test report

Family Licross® 21 Recessed	Order number: 52TE12DN455G EAN: 4058352013328	LP number 59101_364
	Version cover frosted, wide distribution, high visual comfort Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-DALI Rated values Net luminous flux = 5510 lm Power consumption = 29.7 W Luminous efficacy = 185.5 lm/W	serial documentation 24.11.2023





Luminous intensity in cd/klm C180-0 C270-90 **Imax: 671 cd/klm**

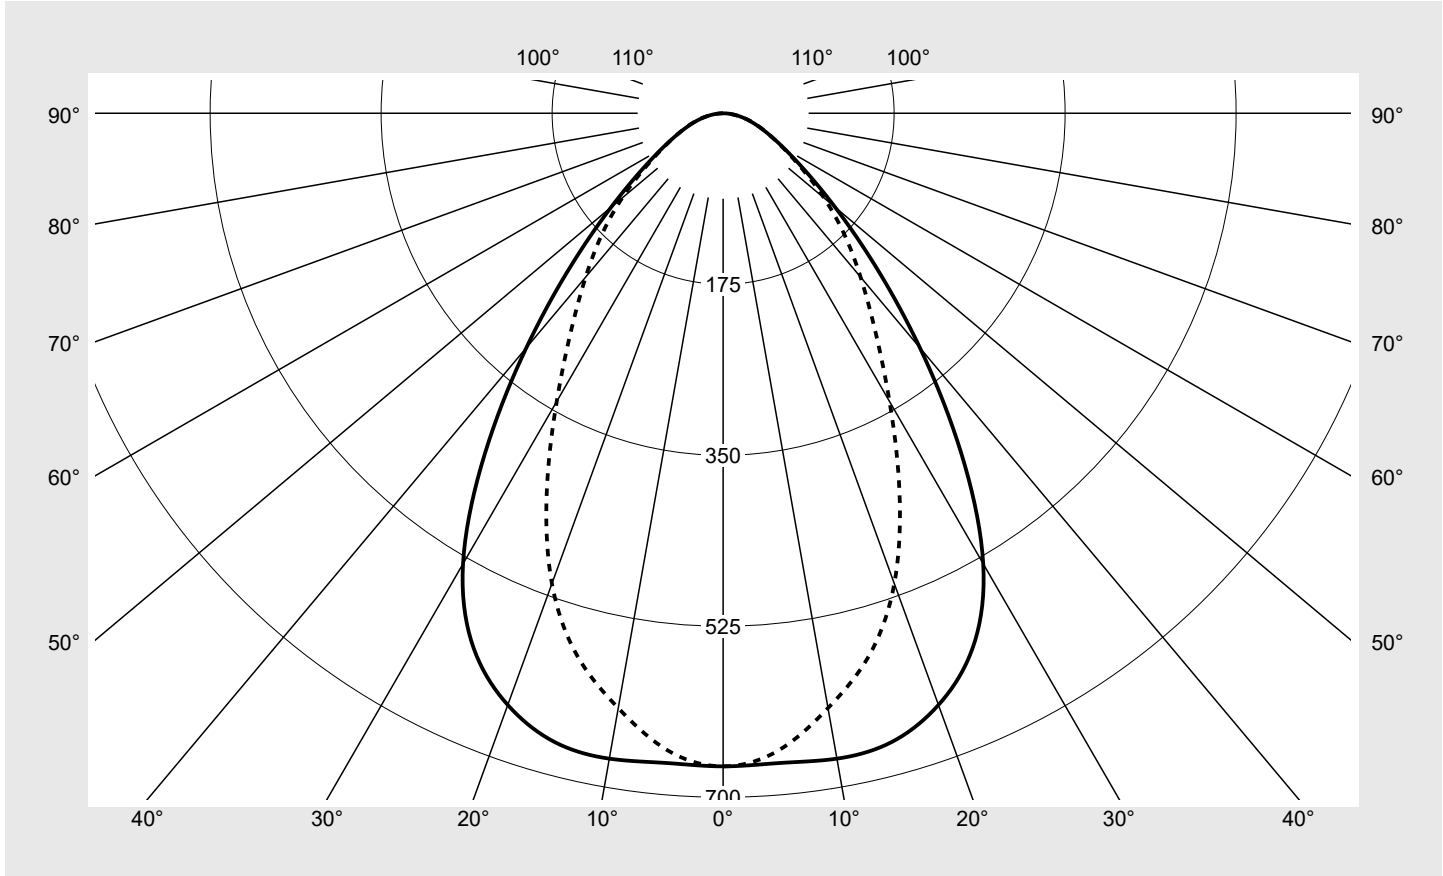

Classifications	
DIN 5040	A 6 0
CIE	N1=72 N2=92 N3=99 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE12DN455G EAN: 4058352013328	LP number 59101_364
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	668.4	668.4	668.4	668.4	668.4	668.4	668.4	4.0	4.0
5°	667.5	664.4	657.4	655.8	655.7	654.2	654.4	31.4	35.4
10°	670.7	665.0	649.1	636.1	625.3	618.7	618.1	60.9	96.3
15°	666.2	657.2	632.9	612.0	594.0	578.5	575.5	87.4	183.7
20°	644.4	632.9	606.9	585.4	554.6	522.7	512.3	108.8	292.5
25°	604.1	590.6	566.7	541.2	494.5	444.9	427.0	121.8	414.2
30°	532.4	517.7	496.3	466.1	413.9	359.9	340.6	122.9	537.1
35°	425.0	409.7	387.0	361.9	325.4	286.0	271.1	111.0	648.1
40°	313.4	295.8	270.7	255.1	246.8	229.4	218.8	91.8	739.9
45°	219.2	200.3	175.7	171.1	181.8	184.7	175.5	71.8	811.7
50°	149.7	132.6	112.6	116.3	133.0	145.6	134.9	54.8	866.5
55°	102.7	89.1	74.7	81.5	98.1	107.9	98.1	41.3	907.7
60°	72.4	62.1	51.3	58.3	71.8	76.5	71.0	31.0	938.7
65°	52.1	44.3	35.9	41.6	51.4	54.2	52.1	23.1	961.9
70°	37.6	31.7	24.7	29.1	35.6	38.4	38.3	16.9	978.8
75°	26.0	21.3	16.2	19.0	22.9	25.9	26.8	11.6	990.4
80°	16.1	12.5	9.2	10.4	12.6	14.8	15.7	6.8	997.3
85°	7.0	5.4	3.8	4.1	4.8	5.7	5.8	2.7	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE12DN455G EAN: 4058352013328	LP number 59101_364
---------------------------------------	--	-------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	19.7	21.1	20.0	21.4	21.7	19.6	21.0	20.0	21.4	21.7
	3H	20.3	21.5	20.6	21.9	22.2	20.4	21.7	20.8	22.0	22.4
	4H	20.5	21.7	20.9	22.1	22.4	20.7	21.9	21.1	22.3	22.6
	6H	20.8	21.9	21.2	22.2	22.6	21.0	22.1	21.4	22.4	22.8
	8H	21.0	21.9	21.4	22.3	22.7	21.1	22.1	21.6	22.5	22.9
	12H	21.0	21.9	21.5	22.3	22.7	21.2	22.1	21.6	22.5	22.9
4H	2H	19.8	21.0	20.2	21.4	21.7	19.8	21.0	20.2	21.3	21.7
	3H	20.5	21.5	20.9	21.9	22.3	20.8	21.7	21.2	22.1	22.5
	4H	20.8	21.7	21.3	22.1	22.6	21.2	22.1	21.7	22.5	22.9
	6H	21.2	21.9	21.6	22.4	22.8	21.6	22.3	22.0	22.8	23.2
	8H	21.3	22.0	21.8	22.4	22.9	21.7	22.4	22.2	22.8	23.3
	12H	21.4	22.0	21.9	22.5	23.0	21.8	22.4	22.3	22.8	23.3
8H	4H	20.9	21.6	21.4	22.1	22.5	21.3	21.9	21.7	22.4	22.9
	6H	21.3	21.8	21.8	22.3	22.8	21.7	22.3	22.2	22.7	23.2
	8H	21.4	21.9	21.9	22.4	22.9	21.9	22.4	22.4	22.8	23.4
	12H	21.6	22.0	22.1	22.5	23.0	22.0	22.4	22.5	22.9	23.4
12H	4H	20.9	21.5	21.4	22.0	22.5	21.3	21.9	21.8	22.3	22.8
	6H	21.3	21.8	21.8	22.3	22.8	21.7	22.2	22.2	22.7	23.2
	8H	21.5	21.9	22.0	22.4	22.9	21.9	22.3	22.4	22.8	23.3

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1500
			B = 58

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		19634.8	17944.5	15734.5	15328.0	16283.2	16543.0	15721.2	
50°		14748.3	13062.3	11095.5	11459.5	13103.9	14347.6	13287.2	
55°		11336.2	9841.1	8250.2	9001.6	10829.7	11919.4	10827.0	
60°		9168.4	7870.2	6499.0	7390.2	9090.5	9691.4	8990.7	
65°		7808.0	6645.5	5387.1	6237.7	7709.8	8115.6	7800.5	
70°		6957.9	5866.9	4574.5	5380.1	6585.9	7110.9	7092.9	
75°		6362.0	5211.4	3972.2	4643.9	5606.3	6328.0	6556.0	
80°		5868.0	4574.7	3365.7	3809.5	4605.3	5415.8	5741.5	
85°		5088.9	3919.6	2767.9	2984.4	3508.4	4108.6	4242.3	


Photometric test report

Family Licross® 21 Recessed	Order number: 52TE12DN455G EAN: 4058352013328	LP number 59101_364
--	--	--------------------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

siteco

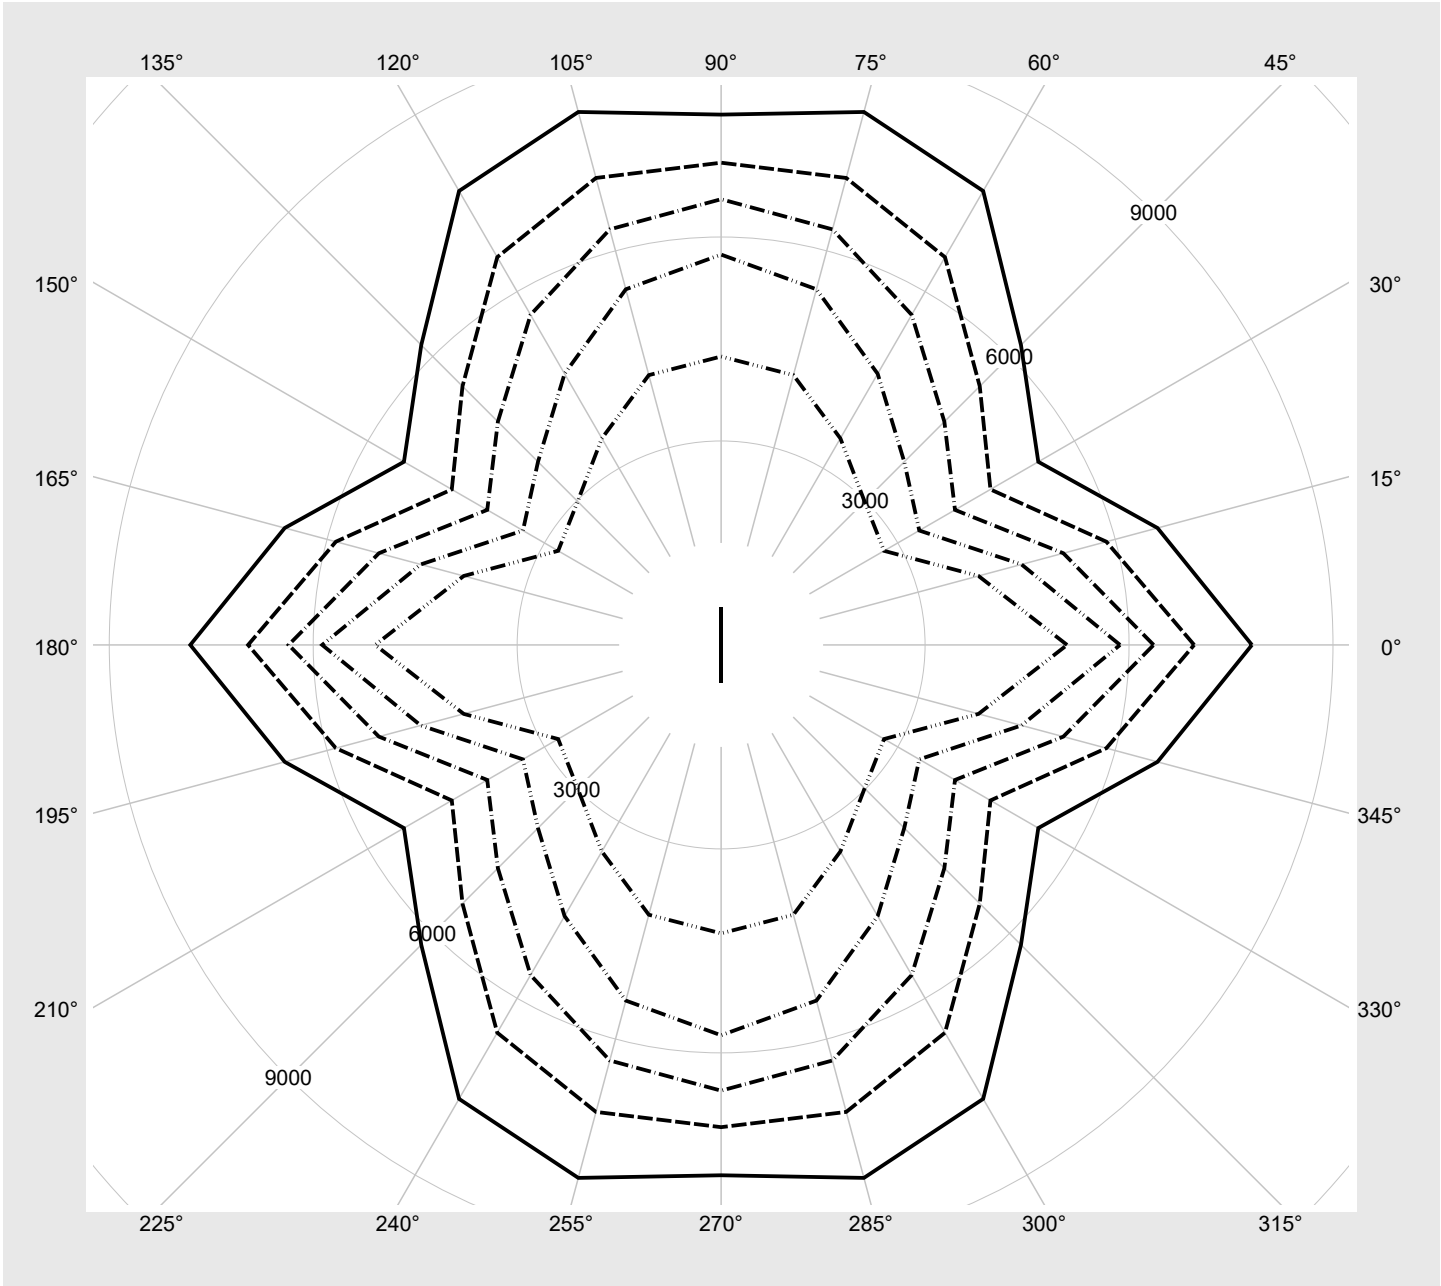

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE12DN455G EAN: 4058352013328	LP number 59101_364
---------------------------------------	--	--------------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	5510	29.7
95	241	252	5239	28.3
90	228	250	4966	26.9
85	215	248	4693	25.5
80	202	246	4416	24.2
75	189	243	4140	22.8
70	176	241	3861	21.3
65	163	238	3583	19.9
60	150	235	3301	18.4
55	137	231	3021	16.9
50	125	228	2758	15.5
45	112	224	2473	14.0
40	100	220	2212	12.5
35	87	215	1925	11.5
30	75	209	1660	10.3
25	62	202	1372	8.9
20	50	194	1105	7.5
15	38	184	839	6.2