

Photometric test report

Family
Silica® 21

Order number: **51MX22DN39BB**
EAN: **4069025105202**

LP number
59266_229

serial
documentation
19.03.2024

siteco



Version surface-mounted luminaire, reflector, black,
direct distribution, wide distribution, $UGR \leq 19$
($L65 \leq 1000 \text{ cd/m}^2$)

Lamps LED 3000 K | CRI ≥ 80

Controlgear ECG-DALI


Rated values Net luminous flux = 9720 lm
Power consumption = 62.7 W
Luminous efficacy = 155 lm/W

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 719 cd/klm

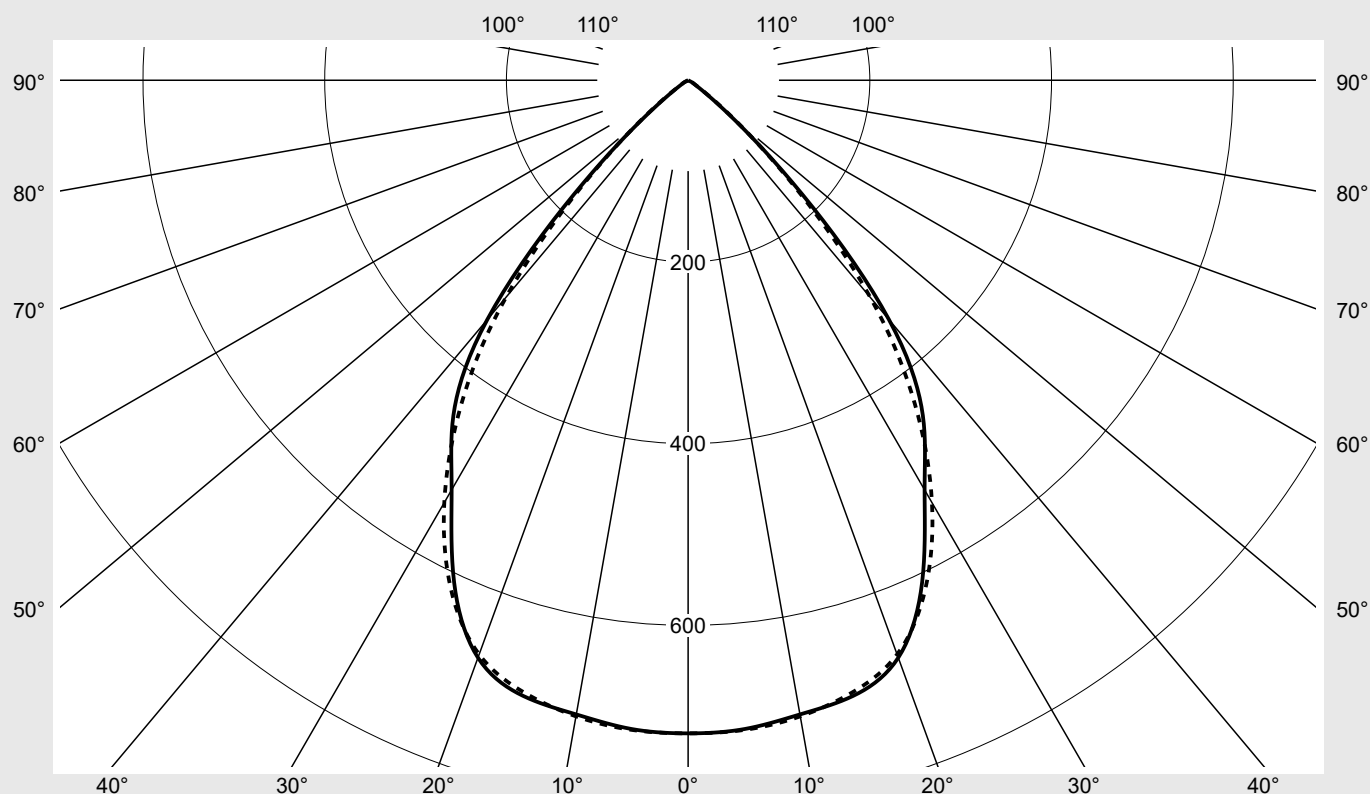

Classifications

DIN 5040 A 6 0
CIE N1=86 N2=100 N3=100
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21	Order number: 51MX22DN39BB EAN: 4069025105202	LP number 59266_229
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	718.8	718.8	718.8	718.8	718.8	718.8	718.8	4.3	4.3
5°	716.8	715.7	712.2	716.2	717.8	715.2	717.7	34.2	38.5
10°	708.8	709.0	703.3	708.6	709.9	707.6	710.9	67.4	105.9
15°	701.5	704.3	697.3	698.3	698.8	696.7	697.6	99.2	205.1
20°	676.3	682.5	681.1	681.0	677.6	673.2	672.5	127.2	332.2
25°	609.5	618.9	627.5	636.4	634.5	625.9	617.8	145.0	477.3
30°	520.6	528.9	533.1	542.9	550.7	541.7	536.8	147.4	624.6
35°	450.5	455.7	444.2	436.3	445.0	443.0	435.2	139.8	764.4
40°	343.9	350.9	343.2	332.9	329.4	321.5	312.0	117.8	882.2
45°	178.2	185.2	190.8	192.2	186.9	176.3	167.1	71.3	953.5
50°	59.7	64.4	73.8	78.7	75.2	68.1	63.7	29.5	983.0
55°	15.6	18.5	24.7	31.2	26.2	20.2	17.4	10.3	993.3
60°	6.1	6.8	9.1	12.2	9.8	7.7	7.0	4.1	997.4
65°	2.1	2.4	3.4	4.3	3.8	3.0	2.8	1.6	999.0
70°	1.4	1.4	1.0	1.0	1.2	1.5	1.5	0.7	999.7
75°	0.3	0.4	0.3	0.4	0.4	0.5	0.4	0.2	999.9
80°	0.0	0.0	0.1	0.1	0.1	0.2	0.2	0.1	999.9
85°	0.0	0.0	0.1	0.1	0.1	0.2	0.2	0.1	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Silica® 21	Order number: 51MX22DN39BB EAN: 4069025105202	LP number 59266_229
----------------------	--	------------------------

UGR-Table		Standard room							siteco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	19.0	20.3	19.4	20.6	21.0	18.9	20.2	19.2	20.5	20.8
	3H	18.9	20.0	19.3	20.4	20.7	18.7	19.9	19.1	20.2	20.6
	4H	18.8	19.9	19.2	20.2	20.6	18.7	19.7	19.1	20.1	20.4
	6H	18.8	19.7	19.2	20.1	20.5	18.6	19.5	19.0	19.9	20.3
	8H	18.8	19.6	19.2	20.0	20.4	18.6	19.4	19.1	19.8	20.2
	12H	18.8	19.5	19.2	19.9	20.3	18.6	19.4	19.0	19.7	20.2
4H	2H	18.9	19.9	19.3	20.2	20.6	18.7	19.7	19.1	20.1	20.4
	3H	18.7	19.5	19.1	19.9	20.4	18.5	19.4	19.0	19.8	20.2
	4H	18.6	19.4	19.1	19.8	20.2	18.4	19.2	18.9	19.6	20.0
	6H	18.5	19.2	19.0	19.6	20.1	18.4	19.0	18.8	19.4	19.9
	8H	18.5	19.1	19.0	19.5	20.0	18.3	18.9	18.8	19.3	19.8
	12H	18.5	19.0	19.0	19.4	19.9	18.3	18.8	18.8	19.2	19.7
8H	4H	18.5	19.1	19.0	19.5	20.0	18.3	18.9	18.8	19.3	19.8
	6H	18.4	18.8	18.9	19.3	19.8	18.2	18.7	18.7	19.2	19.7
	8H	18.3	18.7	18.8	19.2	19.8	18.2	18.6	18.7	19.1	19.6
	12H	18.3	18.6	18.8	19.1	19.7	18.1	18.5	18.7	19.0	19.5
12H	4H	18.5	19.0	19.0	19.4	19.9	18.3	18.8	18.8	19.2	19.7
	6H	18.4	18.7	18.9	19.2	19.8	18.2	18.6	18.7	19.1	19.6
	8H	18.3	18.6	18.8	19.1	19.7	18.1	18.5	18.7	19.0	19.5

Luminance table		Max. for $\gamma \geq 65^\circ$					Photometric dimensions in mm:		L = 2646 B = 49	
C-planes	γ	0°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°		
		180°							Luminance in cd/m²	
45°		18893.8	19639.4	20224.8	20378.7	19816.4	18686.5	17719.1		
50°		6967.4	7515.8	8602.9	9174.9	8765.7	7944.9	7434.7		
55°		2040.2	2416.2	3223.4	4082.0	3422.4	2643.9	2274.9		
60°		914.5	1022.3	1370.7	1828.8	1475.1	1154.2	1044.6		
65°		373.2	429.1	595.7	753.9	671.6	529.3	489.2		
70°		297.0	310.2	229.3	215.0	259.3	333.6	336.2		
75°		82.6	110.1	89.5	125.7	115.3	137.9	120.5		
80°		20.7	20.7	30.7	46.2	61.7	71.7	82.0		
85°		20.6	36.1	45.6	81.7	117.8	142.8	153.1		

Photometric test report

Family
Silica® 21

Order number: 51MX22DN39BB
EAN: 4069025105202

LP number
59266_229

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

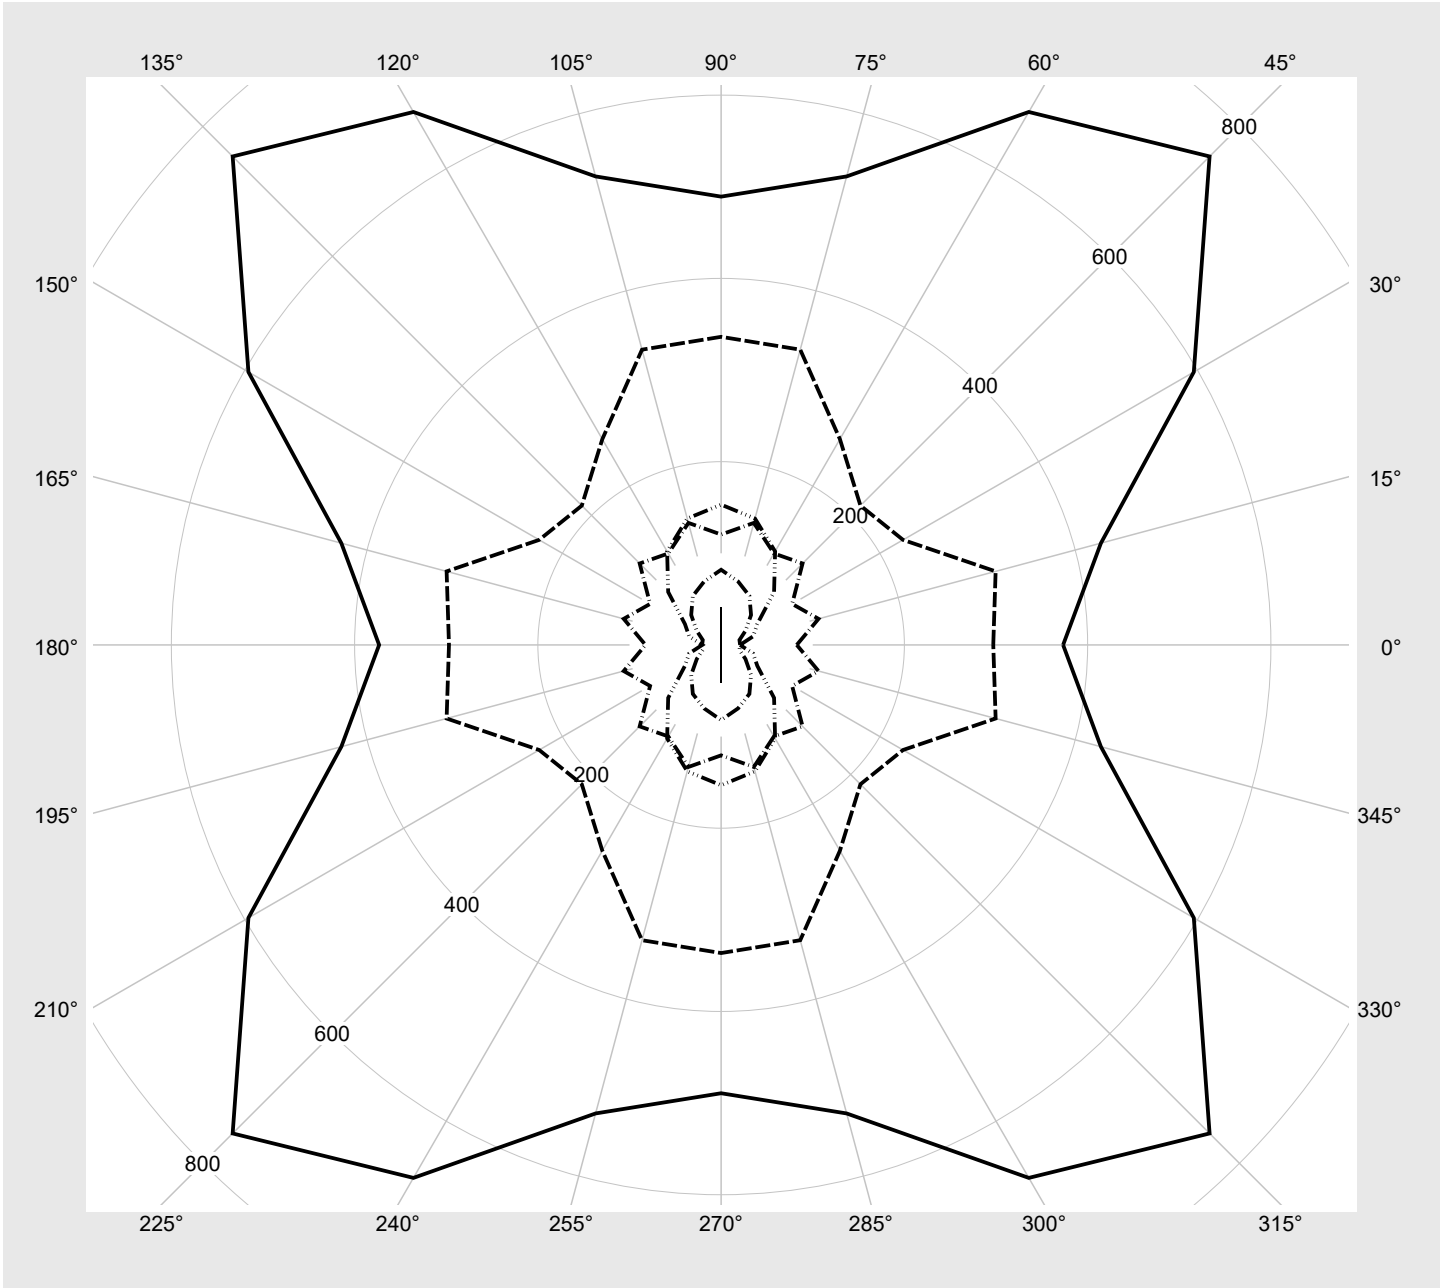

Photometric test report

Family Silica® 21	Order number: 51MX22DN39BB EAN: 4069025105202	LP number 59266_229
Dimming levels table		environmental temperature: 25°C
		siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	9720	62.7
95	240	252	9219	59.7
90	227	250	8749	56.9
85	214	248	8273	54.0
80	200	245	7759	50.9
75	187	243	7279	47.9
70	174	240	6794	44.9
65	161	237	6307	41.9
60	148	234	5815	38.8
55	136	231	5357	35.9
50	123	227	4857	32.7
45	110	223	4355	29.5
40	98	219	3889	26.4
35	86	214	3420	23.4
30	73	208	2909	20.0
25	61	202	2434	16.9
20	49	194	1956	13.9
15	37	183	1474	10.8
10	25	169	992	7.8
5	12	142	467	4.6
3	8	127	305	3.5