


Photometric test report

Family Modario® 31	Order number: 53BM812DV4F5D23S EAN: 4069025254931	LP number 59594_24
	Version diffuser optic, frosted, wide distribution	serial documentation 02.05.2024
	Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-DALI Setting AC-mode Rated values Net luminous flux = 15730 lm Power consumption = 91.0 W Luminous efficacy = 172.9 lm/W	

siteco

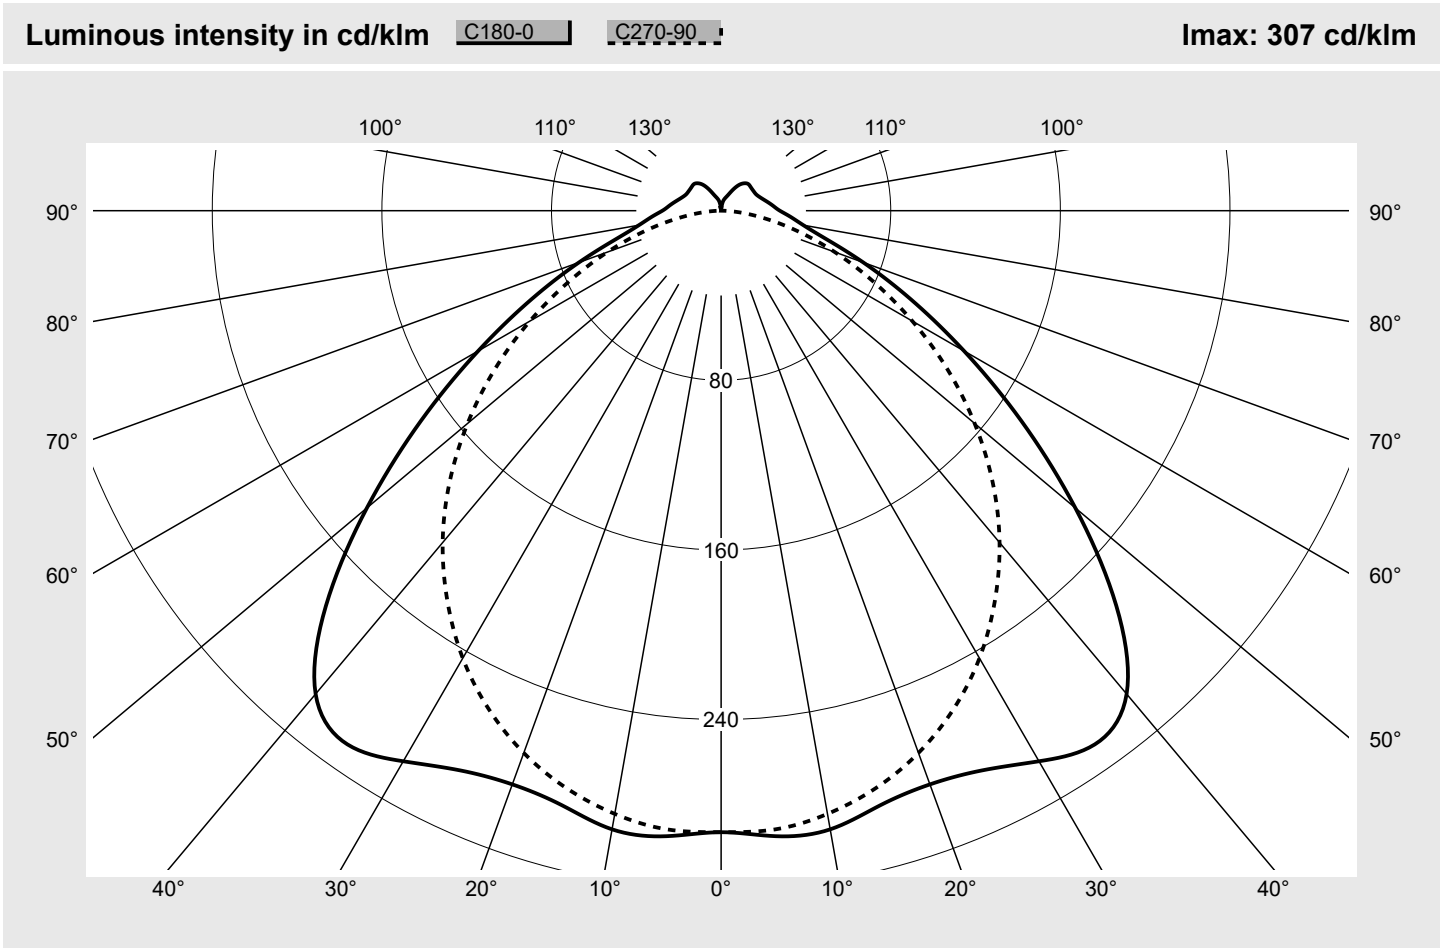

Classifications		Luminaire light output ratios	
DIN 5040	A 4 1	η_{LB}	100.0%
CIE	N1=47 N2=80 N3=95	ϕ_u	92.6%
	N4=93 N5=100	ϕ_o	7.4%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Modario® 31	Order number: 53BM812DV4F5D23S EAN: 4069025254931	LP number 59594_24
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	293.1	293.1	293.1	293.1	293.1	293.1	293.1	1.8	1.8
5°	296.1	295.6	293.1	293.6	293.8	293.0	292.9	14.0	15.8
10°	296.3	296.3	293.6	293.6	292.6	289.9	288.9	27.9	43.7
15°	290.3	290.9	288.4	289.1	288.3	284.2	281.9	40.8	84.5
20°	287.9	288.2	282.8	281.1	280.6	275.9	272.2	52.8	137.3
25°	291.3	290.8	281.6	274.0	270.0	264.7	259.4	64.0	201.2
30°	299.8	298.4	283.7	269.7	258.3	250.5	243.7	74.6	275.8
35°	307.3	306.0	288.6	266.7	246.6	233.7	225.0	84.2	360.1
40°	297.5	299.0	287.4	263.1	235.0	215.2	204.3	91.1	451.1
45°	263.6	268.2	268.7	253.4	221.8	194.2	181.1	92.3	543.4
50°	218.1	223.5	232.0	231.1	204.9	171.7	156.1	87.5	630.9
55°	172.9	177.3	186.9	195.4	181.1	147.5	130.2	77.8	708.7
60°	132.3	135.3	142.3	152.9	149.4	121.4	104.1	64.8	773.5
65°	98.5	100.2	104.0	112.2	114.5	94.5	79.4	50.9	824.4
70°	71.4	72.6	74.4	79.3	82.2	69.0	57.1	37.9	862.3
75°	51.0	51.6	52.9	55.5	55.9	46.4	37.5	27.0	889.4
80°	39.4	39.1	38.7	38.1	35.5	27.5	20.9	18.8	908.2
85°	32.8	32.1	30.1	26.5	21.0	13.7	8.3	13.1	921.3
90°	27.7	27.1	24.5	19.3	12.6	5.6	0.8	9.4	930.7
95°	24.8	24.4	22.4	17.8	11.6	5.3	0.8	8.6	939.3
100°	22.5	22.2	20.5	16.7	11.5	5.5	0.8	7.9	947.2
105°	20.6	20.3	18.7	16.0	11.5	5.9	0.8	7.3	954.6
110°	19.2	18.7	17.6	15.5	11.7	6.3	0.7	6.8	961.4
115°	18.2	17.8	17.0	15.3	12.2	5.8	0.8	6.4	967.8
120°	17.9	17.4	16.9	15.5	12.3	5.3	0.8	6.1	973.9
125°	17.8	17.4	16.9	15.5	11.8	5.2	0.8	5.7	979.6
130°	17.9	17.4	16.8	15.0	10.1	5.0	0.9	5.2	984.7
135°	17.9	17.3	16.2	13.6	8.1	4.3	1.0	4.5	989.2
140°	16.9	16.0	14.5	11.2	6.7	3.5	1.1	3.6	992.8
145°	14.9	14.0	12.0	8.5	5.5	2.8	1.2	2.7	995.4
150°	11.8	10.8	9.0	6.5	4.7	2.2	1.4	1.8	997.3
155°	8.6	8.1	7.0	5.2	4.0	1.7	1.5	1.2	998.5
160°	6.8	6.5	5.3	4.3	3.2	1.5	1.5	0.8	999.2
165°	5.5	5.3	3.9	3.4	2.1	1.6	1.6	0.5	999.7
170°	3.8	3.1	2.5	2.0	1.6	1.6	1.6	0.2	999.9
175°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	0.1	1000.0
180°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	0.0	1000.0

Photometric test report

Family Modario® 31	Order number: 53BM812DV4F5D23S EAN: 4069025254931	LP number 59594_24
UGR-Table	Standard room	siteco

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	24.5	26.2	24.8	26.5	26.8	24.3	26.0	24.6	26.3	26.6
	3H	25.3	26.8	25.7	27.2	27.5	25.4	26.9	25.8	27.2	27.6
	4H	25.6	27.1	26.0	27.4	27.8	25.8	27.2	26.2	27.6	27.9
	6H	25.9	27.2	26.3	27.6	28.0	26.0	27.4	26.4	27.7	28.1
	8H	26.1	27.3	26.5	27.7	28.1	26.1	27.4	26.5	27.8	28.2
	12H	26.3	27.4	26.7	27.8	28.2	26.2	27.4	26.6	27.8	28.2
4H	2H	25.1	26.6	25.5	26.9	27.3	25.0	26.4	25.4	26.8	27.1
	3H	26.1	27.3	26.5	27.7	28.1	26.3	27.6	26.8	27.9	28.3
	4H	26.5	27.6	27.0	28.0	28.5	26.8	27.9	27.3	28.3	28.8
	6H	26.9	27.9	27.4	28.3	28.8	27.2	28.2	27.6	28.6	29.0
	8H	27.1	28.0	27.6	28.4	28.9	27.3	28.2	27.8	28.6	29.1
	12H	27.4	28.1	27.8	28.6	29.1	27.4	28.2	27.9	28.6	29.1
8H	4H	26.8	27.7	27.2	28.1	28.6	27.1	28.0	27.5	28.4	28.9
	6H	27.3	28.0	27.8	28.5	29.0	27.6	28.3	28.0	28.8	29.3
	8H	27.6	28.2	28.1	28.7	29.2	27.7	28.4	28.2	28.9	29.4
	12H	27.9	28.5	28.4	29.0	29.5	27.9	28.4	28.4	28.9	29.5
12H	4H	26.8	27.6	27.3	28.1	28.6	27.1	27.9	27.6	28.4	28.8
	6H	27.4	28.0	27.9	28.5	29.0	27.6	28.3	28.1	28.8	29.3
	8H	27.7	28.3	28.2	28.8	29.3	27.9	28.4	28.4	28.9	29.4

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1476 B = 75		H(C0) = 25 H(C90) = 0		H(C180) = 25 H(C270) = 0	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°		60° 120° 240° 300°		75° 105° 255° 285°		90° 270°	
γ	Luminance in cd/m²										
45°	39732.3	40775.1	41901.9	41206.7		38210.2		35928.8		36397.1	
50°	34504.0	35702.1	38158.8	39877.8		37780.5		34423.2		34508.6	
55°	29015.1	30080.9	32782.6	36223.0		36229.6		32539.4		32265.9	
60°	23837.2	24676.9	26952.7	30855.0		32943.0		30007.0		29597.7	
65°	19317.8	19936.2	21603.6	25065.0	28373.1			26798.6		26684.3	
70°	15473.2	15998.1	17226.8	20000.8		23430.7		23177.2		23707.4	
75°	12470.9	12868.6	13972.8	16208.9		18918.3		19252.5		20577.1	
80°	11154.7	11327.5	11993.2	13354.8		14949.0		15123.3		17098.3	
85°	11115.9	11195.8	11423.2	11693.0		11805.9		11229.7		13595.6	

Photometric test report

Family
Modario® 31

Order number: 53BM812DV4F5D23S
EAN: 4069025254931

LP number
59594_24

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

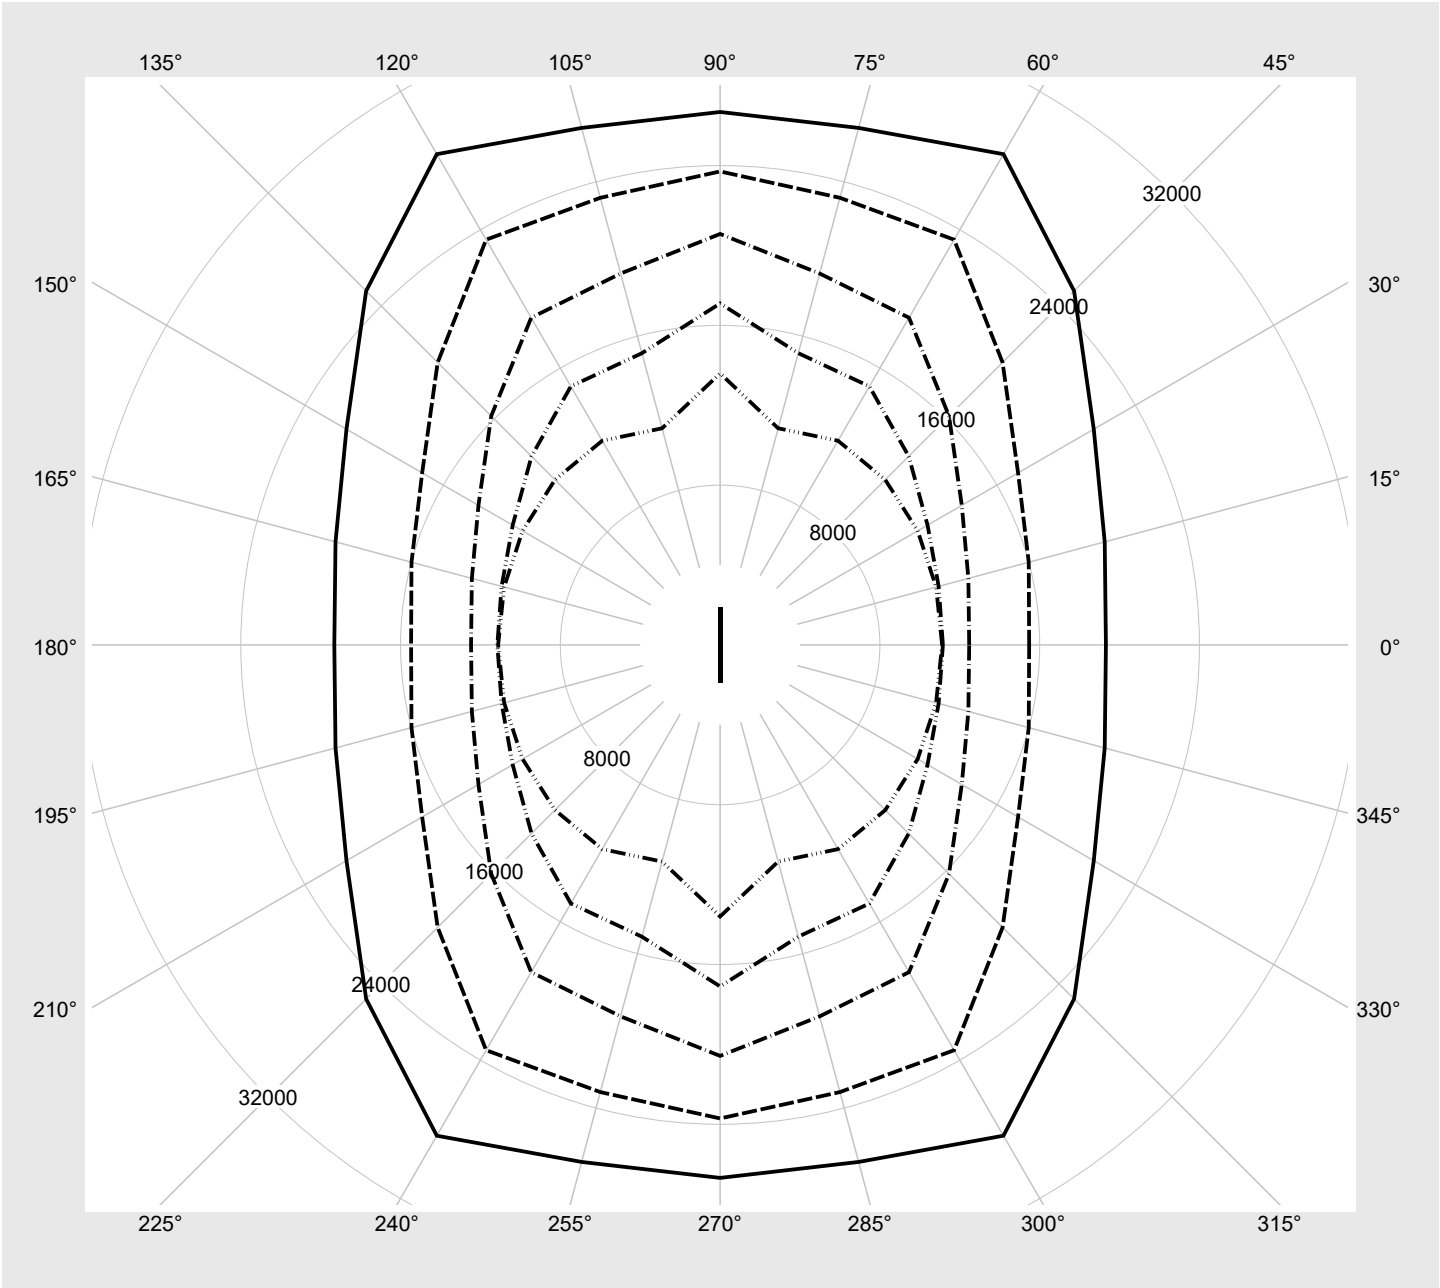

Photometric test report

Family Modario® 31	Order number: 53BM812DV4F5D23S EAN: 4069025254931	LP number 59594_24
Dimming levels table environmental temperature: 25°C		

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	15730	91.0
95	240	252	14928	86.1
90	227	250	14173	81.7
85	213	248	13354	76.9
80	200	245	12586	72.4
75	187	243	11811	68.0
70	174	240	11029	63.5
65	161	237	10240	59.2
60	148	234	9445	54.9
55	135	231	8643	50.5
50	123	227	7895	46.6
45	110	223	7083	42.2
40	97	219	6262	37.9
35	85	214	5500	34.0
30	73	208	4733	30.1
25	61	202	3961	26.2
20	48	193	3119	22.1
15	36	182	2338	18.2
10	24	168	1552	14.2
5	12	142	762	10.4
1	4	102	233	7.9