


Photometric test report

Family Lunis 21		Order number: 51DB18MA91C EAN: 4069025013040	LP number 59681_2
		Version	recessed luminaire, Combined lens and reflector optics, reflector, white, rotationally symmetrical medium distribution, adjustable color temperature: 3000K 4000K 6500K
		Lamps	LED 4000 K CRI ≥ 80
		Controlgear	ECG
		Setting	factory setting: colour temperature 4000K
		Rated values	Net luminous flux = 980 lm Power consumption = 5.9 W Luminous efficacy = 166.1 lm/W
		serial documentation 27.09.2024	
		siteco	

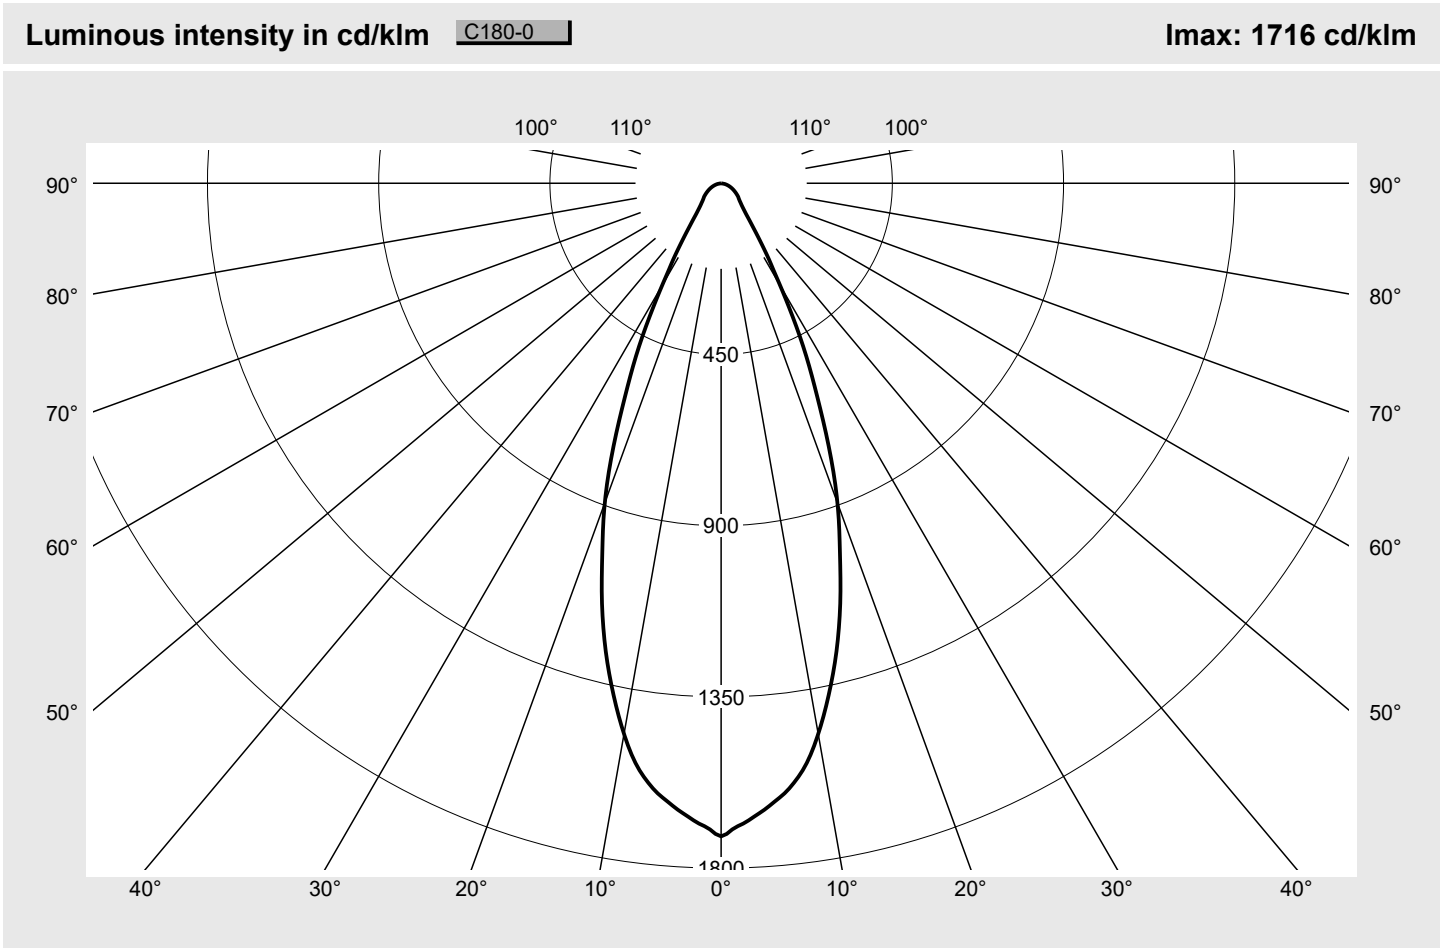

Classifications		Luminaire light output ratios	
DIN 5040	A 7 0	η_{LB}	100.0%
CIE	N1=86 N2=95 N3=99	ϕ_u	100.0%
	N4=100 N5=100	ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Lunis 21	Order number: 51DB18MA91C EAN: 4069025013040	LP number 59681_2
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	1716.5	0.4	0.4
1°	1698.3	3.3	3.7
2°	1683.7	6.4	10.1
3°	1666.7	9.6	19.7
4°	1649.6	12.6	32.3
5°	1630.2	15.6	47.9
6°	1610.7	18.5	66.3
7°	1585.2	21.2	87.5
8°	1554.8	23.7	111.2
9°	1515.9	26.0	137.3
10°	1469.7	28.0	165.2
11°	1419.9	29.7	194.9
12°	1367.6	31.2	226.1
13°	1314.1	32.4	258.5
14°	1258.2	33.4	291.9
15°	1198.9	34.0	326.0
16°	1137.1	34.4	360.3
17°	1072.2	34.4	394.7
18°	1009.7	34.2	428.9
19°	952.6	34.0	462.9
20°	893.9	33.5	496.5
21°	831.0	32.7	529.1
22°	763.8	31.4	560.5
23°	696.0	29.8	590.3
24°	630.3	28.1	618.4
25°	572.1	26.5	644.9
26°	518.0	24.9	669.8
27°	463.8	23.1	692.9
28°	408.7	21.0	714.0
29°	356.6	19.0	732.9
30°	310.2	17.0	749.9
31°	269.8	15.2	765.2
32°	240.3	14.0	779.1
33°	211.0	12.6	791.7
34°	184.7	11.3	803.1
35°	162.4	10.2	813.3
36°	143.3	9.2	822.5
37°	128.3	8.5	831.0
38°	115.5	7.8	838.8
39°	104.6	7.2	846.0
40°	96.6	6.8	852.8
41°	89.9	6.5	859.3
42°	84.3	6.2	865.5
43°	79.5	5.9	871.4
44°	75.6	5.8	877.2
45°	72.2	5.6	882.8
46°	68.9	5.4	888.2

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
47°	66.1	5.3	893.5
48°	63.7	5.2	898.7
49°	61.6	5.1	903.8
50°	59.8	5.0	908.8
51°	58.1	5.0	913.8
52°	56.3	4.9	918.6
53°	54.1	4.7	923.4
54°	51.9	4.6	928.0
55°	49.8	4.5	932.4
56°	47.8	4.3	936.8
57°	45.8	4.2	941.0
58°	43.8	4.1	945.1
59°	41.8	3.9	949.0
60°	39.9	3.8	952.8
61°	38.1	3.7	956.4
62°	36.3	3.5	960.0
63°	34.5	3.4	963.3
64°	32.8	3.2	966.6
65°	31.1	3.1	969.7
66°	29.4	2.9	972.6
67°	27.7	2.8	975.4
68°	26.0	2.6	978.1
69°	24.4	2.5	980.5
70°	22.8	2.3	982.9
71°	21.1	2.2	985.1
72°	19.5	2.0	987.1
73°	17.9	1.9	989.0
74°	16.4	1.7	990.7
75°	14.8	1.6	992.3
76°	13.3	1.4	993.7
77°	11.8	1.3	995.0
78°	10.4	1.1	996.1
79°	9.0	1.0	997.0
80°	7.6	0.8	997.9
81°	6.3	0.7	998.5
82°	5.1	0.6	999.1
83°	3.3	0.4	999.5
84°	1.3	0.1	999.6
85°	1.0	0.1	999.7
86°	0.7	0.1	999.8
87°	0.7	0.1	999.9
88°	0.7	0.1	999.9
89°	0.7	0.1	1000.0
90°	0.0	0.0	1000.0
180°	0.0	0.0	1000.0

Photometric test report

Family Lunis 21			Order number: 51DB18MA91C EAN: 4069025013040							LP number 59681_2	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	21.3	22.5	21.7	22.8	23.1	21.3	22.5	21.7	22.8	23.1
	3H	22.4	23.4	22.8	23.8	24.1	22.4	23.4	22.8	23.8	24.1
	4H	22.8	23.8	23.2	24.1	24.5	22.8	23.8	23.2	24.1	24.5
	6H	23.0	23.9	23.5	24.3	24.7	23.0	23.9	23.5	24.3	24.7
	8H	23.2	23.9	23.6	24.3	24.7	23.2	23.9	23.6	24.3	24.7
	12H	23.2	23.8	23.6	24.2	24.6	23.2	23.8	23.6	24.2	24.6
4H	2H	21.8	22.7	22.2	23.1	23.5	21.8	22.7	22.2	23.1	23.5
	3H	23.0	23.8	23.4	24.2	24.6	23.0	23.8	23.4	24.2	24.6
	4H	23.5	24.2	23.9	24.6	25.1	23.5	24.2	23.9	24.6	25.1
	6H	23.8	24.4	24.3	24.9	25.3	23.8	24.4	24.3	24.9	25.3
	8H	23.9	24.4	24.4	24.9	25.4	23.9	24.4	24.4	24.9	25.4
	12H	23.9	24.3	24.4	24.8	25.3	23.9	24.3	24.4	24.8	25.3
8H	4H	23.7	24.2	24.2	24.7	25.1	23.7	24.2	24.2	24.7	25.1
	6H	24.1	24.5	24.6	25.0	25.5	24.1	24.5	24.6	25.0	25.5
	8H	24.1	24.5	24.6	25.0	25.5	24.1	24.5	24.6	25.0	25.5
	12H	24.1	24.4	24.7	24.9	25.5	24.1	24.4	24.7	24.9	25.5
12H	4H	23.7	24.1	24.2	24.6	25.1	23.7	24.1	24.2	24.6	25.1
	6H	24.1	24.4	24.6	24.9	25.5	24.1	24.4	24.6	24.9	25.5
	8H	24.2	24.5	24.7	25.0	25.5	24.2	24.5	24.7	25.0	25.5

Luminance table		Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	D = 57
C-planes	0°			
γ	Luminance in cd/m²			
45°	39232.2			
50°	35727.2			
55°	33347.9			
60°	30673.2			
65°	28258.1			
70°	25553.5			
75°	21987.7			
80°	16795.3			
85°	4243.4			

Photometric test report

Family
Lunis 21

Order number: 51DB18MA91C
EAN: 4069025013040

LP number
59681_2

Luminance values in cd/m²

γ 65°

γ 70°

γ 75°

γ 80°

γ 85°

siteco

