


Photometric test report

Family Floodlight FL11	Order number: 5XA779729X02FB EAN: 4069025145444	LP number 59552_285
	Version	standard bracket
	Optic	asymmetric distribution PL33T with Back Light Control
	Cover	toughened safety glass
	Lamps	LED 5700 K CRI ≥ 70
	Controlgear	ECG-DMX
	Rated values	Ta = 10 °C Net luminous flux = 166370 lm Power consumption = 1560.6 W Luminous efficacy = 106.6 lm/W
		serial documentation 19.12.2024
		

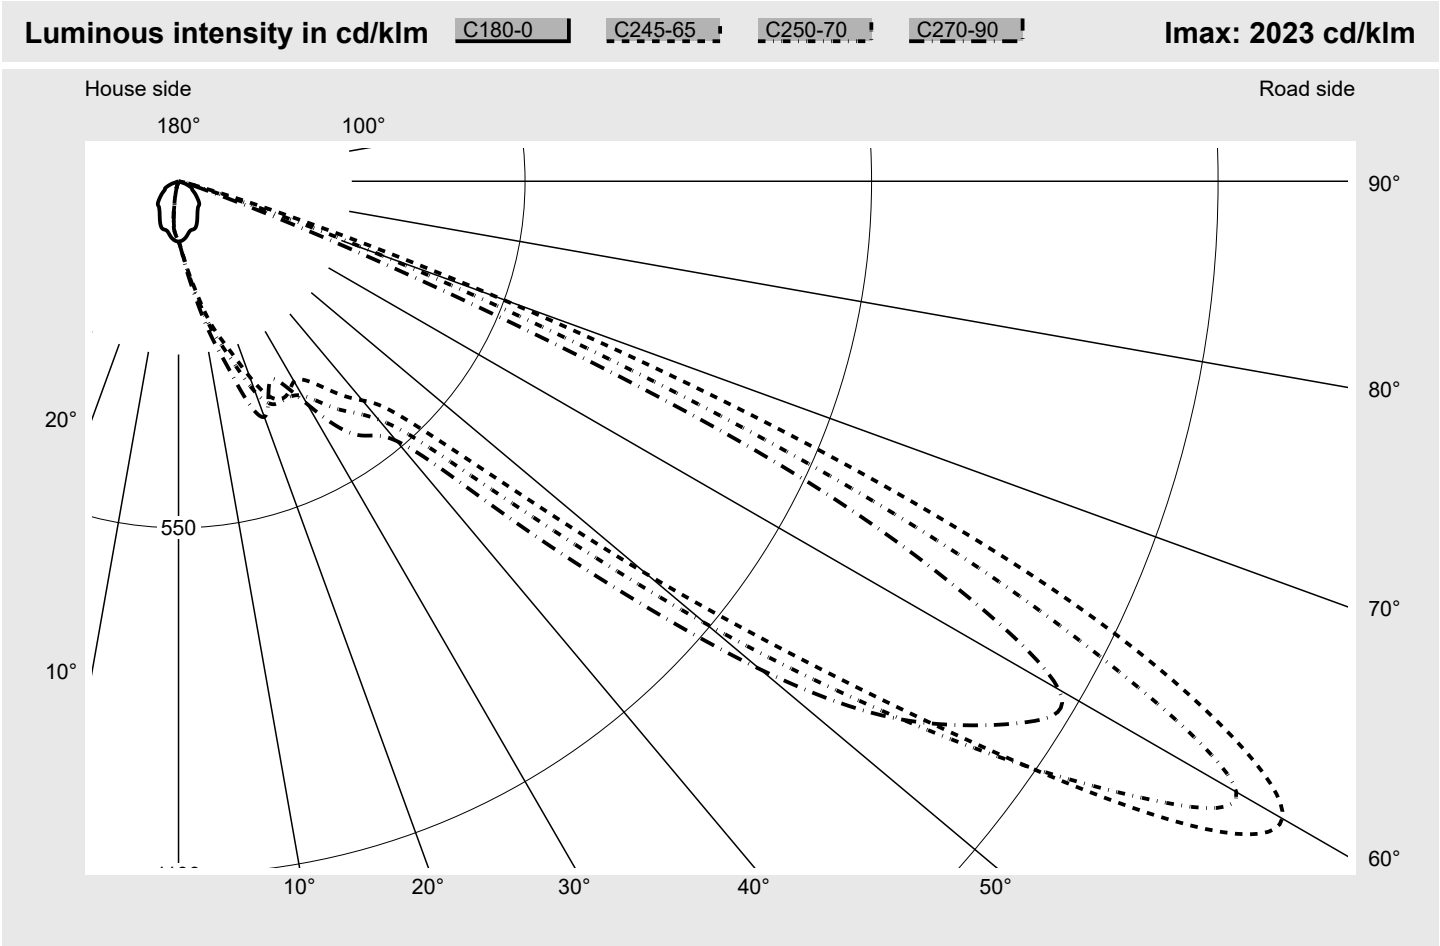


Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G3
Eta 0° - 90°	100.0%	Imax 70°	555.3
Eta 90° - 180°	0.0%	Imax 80°	11.9
		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
Measurement conditions			
DIN EN 13032 and DIN 5032			

Photometric test report

Family Floodlight FL11	Order number: 5XA779729X02FB EAN: 4069025145444	LP number 59552_285
Envelope curve in cd/klm KMK 60° KMK 57.5° KMK 55° KMK 52.5°		

siteco

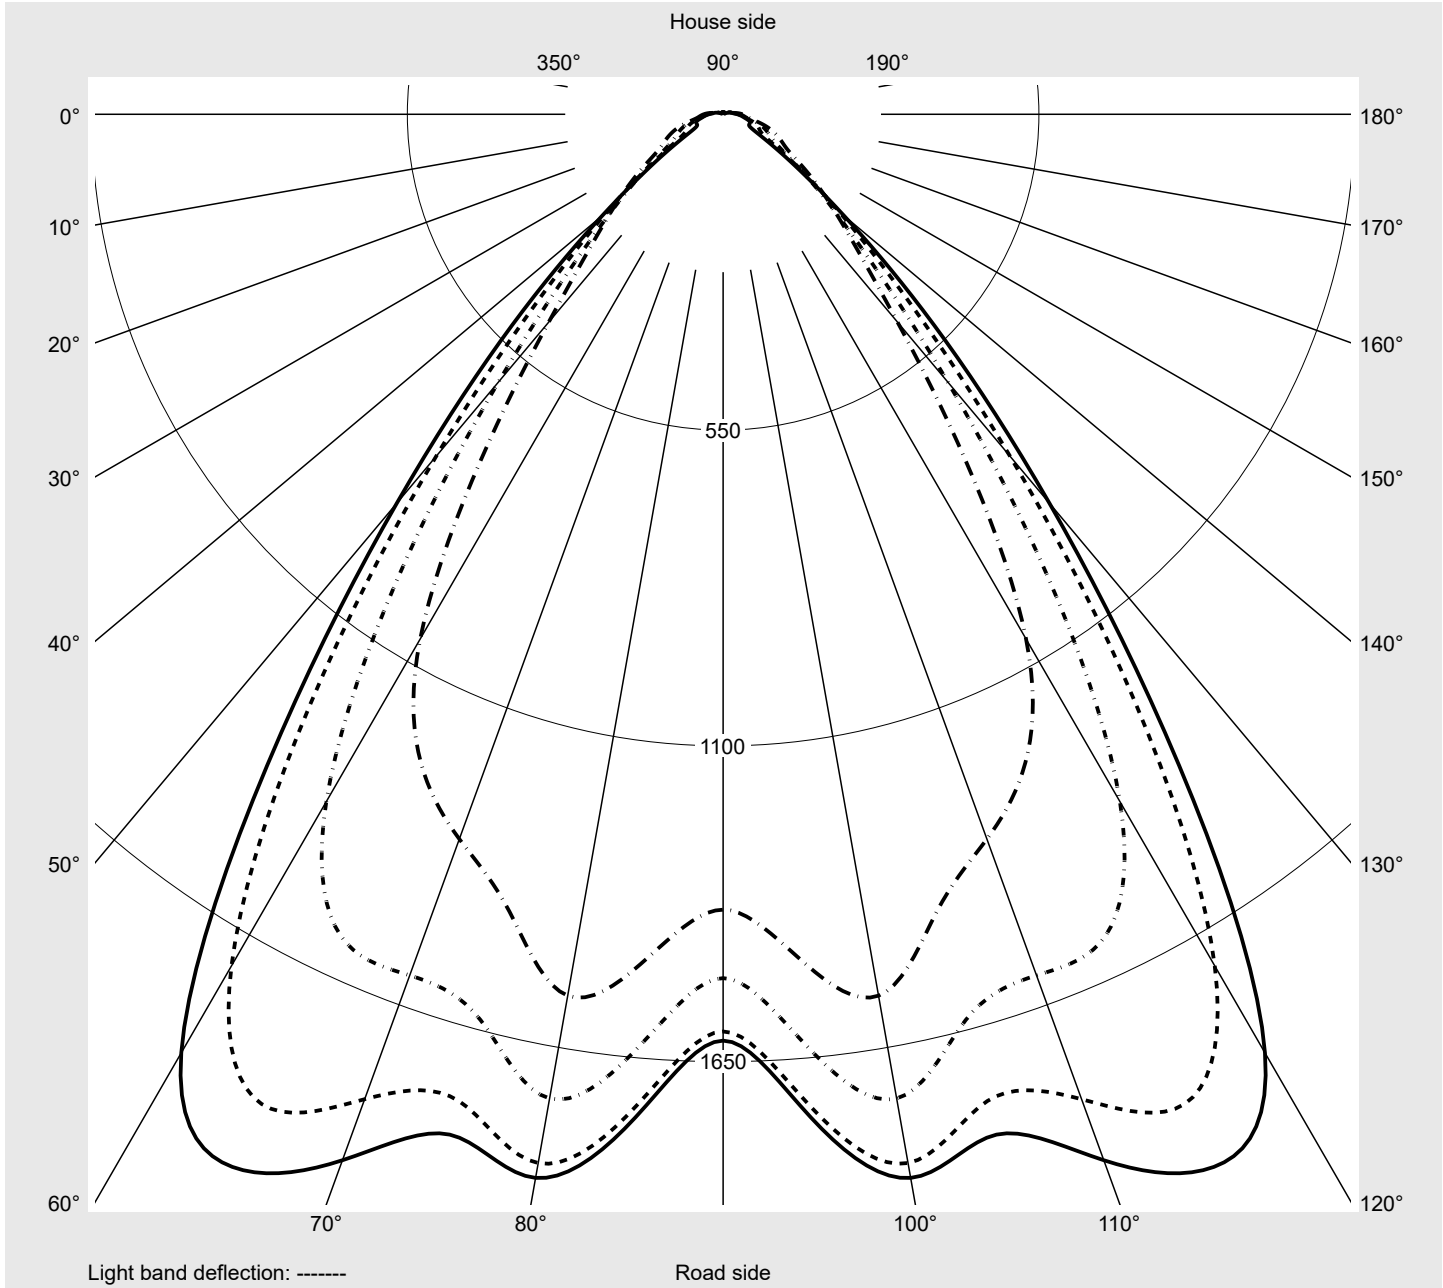

Photometric test report

Family Floodlight FL11		Order number: 5XA779729X02FB EAN: 4069025145444										LP number 59552_285	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5
2,5°	94.9	95.1	96.2	97.4	98.7	100.0	101.3	102.5	103.7	104.9	106.1	107.2	108.2
5,0°	92.9	94.1	96.5	99.1	101.9	105.1	108.5	112.1	115.8	119.4	122.8	126.1	129.2
7,5°	89.6	91.7	95.3	99.5	104.6	110.3	116.4	122.5	128.8	135.2	141.4	147.7	153.3
10,0°	85.3	88.2	93.2	99.7	107.2	115.3	123.7	132.3	141.2	151.1	161.1	171.3	181.3
12,5°	81.4	85.5	92.1	100.5	109.7	119.7	130.4	142.6	155.6	169.6	184.6	199.3	214.2
15,0°	80.0	85.8	94.3	104.4	114.9	126.4	140.3	156.1	173.8	193.0	211.9	228.4	243.5
17,5°	79.9	87.6	98.4	110.1	122.0	136.6	153.6	172.7	192.5	211.0	228.3	246.4	266.9
20,0°	78.4	87.8	100.5	114.2	129.7	148.2	168.9	189.8	207.9	225.3	246.3	271.3	300.7
22,5°	74.7	85.7	100.2	117.0	137.8	161.0	183.4	203.6	224.9	249.5	278.2	308.8	340.0
25,0°	69.8	81.5	97.2	117.7	143.2	168.1	190.1	215.3	243.0	274.3	308.6	339.3	365.4
27,5°	64.6	75.9	92.4	116.7	146.1	172.4	200.1	232.6	264.3	294.6	321.2	341.9	361.1
30,0°	60.0	70.6	88.4	117.6	151.0	183.3	218.3	257.9	288.5	303.1	310.4	320.4	340.0
32,5°	56.2	66.8	86.9	121.5	159.4	198.1	242.6	290.3	311.0	304.6	295.6	304.3	335.0
35,0°	53.4	64.6	87.2	121.2	163.4	211.4	264.4	309.9	316.0	300.7	293.9	312.3	353.0
37,5°	51.2	64.5	85.1	114.4	163.4	220.4	274.9	303.6	301.2	295.9	301.3	326.5	377.6
40,0°	50.2	64.4	80.3	109.5	160.7	219.2	266.0	276.8	283.6	300.2	315.2	342.8	395.9
42,5°	48.7	63.2	77.3	110.4	162.0	212.2	245.7	253.1	280.4	311.7	330.6	358.7	415.7
45,0°	45.3	60.5	74.0	109.5	158.2	193.8	215.1	238.0	286.5	321.9	342.6	384.6	471.8
47,5°	41.2	55.5	66.2	99.4	140.4	164.7	185.9	226.5	280.1	321.5	356.5	444.4	591.0
50,0°	37.3	48.0	58.4	87.0	116.9	136.3	160.4	207.7	260.3	316.2	394.3	561.6	793.7
52,5°	33.8	41.1	51.6	74.9	95.6	112.8	135.7	183.4	244.2	326.9	472.6	736.5	1055.3
55,0°	29.9	36.4	45.6	64.2	78.8	91.2	111.3	158.3	238.2	366.9	608.8	990.5	1382.4
57,5°	26.4	33.2	42.1	56.2	65.5	72.4	95.1	156.0	263.2	448.0	777.4	1252.6	1712.6
60,0°	24.7	31.8	39.1	47.7	48.9	51.7	77.0	142.7	275.1	520.5	884.1	1384.8	1887.5
62,5°	23.9	29.7	35.4	38.9	34.8	37.6	60.5	121.7	256.3	497.9	841.5	1324.2	1876.0
65,0°	20.0	24.7	30.4	33.6	26.6	27.4	47.5	97.4	195.0	387.8	667.7	1054.4	1586.9
67,5°	15.3	20.0	25.2	23.9	17.3	18.9	30.0	58.8	119.5	239.3	427.2	690.4	1052.9
70,0°	10.8	15.1	19.9	16.4	11.8	10.8	15.6	32.7	72.2	146.6	268.8	415.2	555.3
72,5°	7.1	10.6	13.8	9.8	6.8	6.6	9.5	18.7	41.9	83.9	143.4	210.1	267.5
75,0°	4.2	6.7	6.9	5.1	3.9	4.4	6.7	10.9	21.3	43.9	73.5	88.1	92.5
77,5°	2.7	4.3	3.1	2.5	2.1	2.6	4.1	6.5	11.6	10.8	10.2	10.4	11.7
80,0°	1.3	1.9	1.3	1.0	0.9	1.4	2.5	3.2	3.6	3.8	4.0	4.6	6.1
82,5°	0.5	0.6	0.5	0.4	0.4	0.8	1.3	1.5	1.6	1.8	2.0	2.3	2.9
85,0°	0.4	0.4	0.4	0.3	0.2	0.4	0.6	0.7	0.7	0.8	0.9	1.0	1.1
87,5°	0.2	0.2	0.2	0.1	0.1	0.1	0.2	0.2	0.3	0.3	0.4	0.4	0.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779729X02FB EAN: 4069025145444	LP number 59552_285
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5
2,5°	109.3	109.9	110.5	111.0	111.2	111.3	93.3	92.6	91.8	91.1	90.5	89.8	89.3
5,0°	132.1	134.7	136.4	137.8	138.8	139.3	90.5	89.0	87.5	86.2	85.0	84.0	82.9
7,5°	158.8	163.8	167.5	170.6	172.4	173.0	86.8	84.6	82.7	81.0	79.2	77.4	75.6
10,0°	191.1	199.5	206.7	212.1	215.3	216.1	82.0	79.5	77.1	74.6	72.2	69.6	66.7
12,5°	228.1	239.7	249.1	255.9	259.8	261.6	77.7	74.9	71.9	68.8	65.5	61.3	55.2
15,0°	258.2	272.7	286.2	297.9	310.0	308.4	74.9	71.2	67.1	63.1	57.8	50.4	42.5
17,5°	289.6	311.9	333.0	351.5	364.1	368.7	73.0	68.0	62.9	57.3	49.3	40.4	32.1
20,0°	330.2	356.3	375.0	388.5	395.9	398.0	69.9	63.4	56.9	49.1	39.9	30.8	24.7
22,5°	366.7	382.4	385.6	381.7	376.1	372.4	65.2	57.4	49.0	39.6	31.0	24.2	20.9
25,0°	381.5	385.8	377.8	364.8	353.0	347.6	59.3	50.2	39.7	30.3	24.2	20.2	12.5
27,5°	378.0	385.2	381.5	374.3	367.8	366.1	54.0	43.5	31.6	24.0	20.5	13.5	10.4
30,0°	366.9	393.0	405.7	407.0	407.2	408.3	49.9	38.4	25.1	20.4	16.8	10.8	9.6
32,5°	374.5	415.0	442.0	451.1	453.3	456.5	46.8	34.3	20.9	18.2	12.4	9.9	8.8
35,0°	398.7	441.7	472.8	485.0	487.9	490.9	44.1	30.6	18.4	16.2	11.0	9.3	7.9
37,5°	428.7	463.9	492.4	505.1	507.0	508.7	41.7	27.4	16.7	13.2	10.3	8.3	7.2
40,0°	454.1	493.9	515.9	532.4	536.8	537.9	38.9	24.3	15.6	11.9	9.5	7.4	6.8
42,5°	489.2	550.5	586.8	619.0	623.4	622.3	35.5	20.4	14.0	11.4	8.8	7.1	6.6
45,0°	576.4	669.3	735.8	795.0	792.8	786.0	32.2	16.7	12.3	11.3	8.4	6.6	6.1
47,5°	733.6	852.2	946.3	1030.3	1010.7	986.2	29.1	14.5	12.0	11.0	7.9	5.9	5.3
50,0°	969.9	1092.1	1200.2	1308.1	1257.4	1205.0	26.9	14.0	12.7	11.1	7.6	5.2	4.6
52,5°	1245.8	1343.3	1437.7	1558.8	1471.9	1385.3	24.6	14.9	13.8	10.9	7.1	4.4	4.1
55,0°	1577.6	1596.0	1633.0	1740.5	1624.7	1504.5	22.4	14.8	12.9	10.2	5.4	3.9	3.7
57,5°	1901.9	1825.5	1779.0	1854.7	1733.5	1597.4	20.0	14.4	11.6	8.8	4.0	3.5	3.4
60,0°	2022.8	1938.6	1839.7	1881.0	1753.9	1613.4	18.1	14.8	10.3	6.6	3.5	3.2	3.0
62,5°	1861.2	1678.3	1551.2	1598.4	1499.9	1383.8	16.1	14.5	8.7	4.0	3.1	2.8	2.6
65,0°	1528.6	1268.7	1152.1	1165.0	1093.8	1008.1	13.1	13.4	6.7	3.1	2.6	2.3	2.2
67,5°	1045.8	751.9	631.8	585.7	520.1	465.0	9.9	10.0	3.9	2.4	2.0	1.9	2.1
70,0°	540.3	336.9	231.7	193.6	156.7	132.9	7.1	6.6	2.5	1.8	1.6	1.6	1.9
72,5°	188.4	85.8	58.9	49.2	41.0	36.1	4.3	3.3	1.9	1.4	1.3	1.4	1.7
75,0°	40.5	29.7	31.6	30.9	24.4	21.3	2.4	2.0	1.3	1.1	1.1	1.2	1.4
77,5°	15.4	17.6	18.3	19.8	14.5	12.2	1.5	1.2	0.9	0.8	0.8	0.9	1.2
80,0°	8.9	9.5	9.4	11.9	8.5	7.0	0.8	0.7	0.5	0.5	0.5	0.7	0.9
82,5°	3.8	4.3	4.1	5.6	4.2	3.3	0.4	0.4	0.3	0.3	0.3	0.5	0.7
85,0°	1.4	1.4	1.3	1.6	1.4	1.2	0.3	0.3	0.2	0.2	0.3	0.3	0.4
87,5°	0.4	0.4	0.4	0.4	0.4	0.4	0.2	0.2	0.1	0.1	0.1	0.2	0.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11		Order number: 5XA779729X02FB EAN: 4069025145444										LP number 59552_285	
Table of values for luminous intensities										Maximum luminous intensity		sīTeco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	95.5	0.1	0.1
2,5°	88.8	88.4	87.9	87.7	87.4	87.2	87.1	86.9	86.8	86.8	86.7	1.2	1.3
5,0°	82.0	81.1	80.2	79.5	78.7	78.0	77.4	77.0	76.7	76.5	76.4	2.4	3.7
7,5°	73.7	71.9	69.7	67.6	65.2	62.9	60.8	59.3	58.0	57.3	57.0	3.7	7.4
10,0°	62.9	58.0	52.9	48.1	43.7	40.2	37.5	35.4	34.0	33.2	32.9	5.0	12.3
12,5°	48.5	41.5	35.6	30.9	27.6	25.6	24.4	23.7	23.3	23.2	23.1	6.5	18.8
15,0°	35.0	29.2	25.3	23.6	22.8	21.8	19.4	16.8	14.8	13.7	13.9	8.3	27.1
17,5°	26.3	23.7	22.1	17.2	13.0	11.5	10.9	10.6	10.3	10.2	10.2	10.3	37.4
20,0°	22.3	16.7	11.8	10.7	10.2	9.8	9.5	9.3	9.1	9.1	9.0	12.4	49.8
22,5°	13.5	10.8	10.0	9.5	9.1	8.9	8.6	8.4	8.3	8.2	8.2	14.4	64.2
25,0°	10.4	9.6	9.0	8.6	8.3	8.1	7.9	7.8	7.7	7.6	7.6	16.0	80.2
27,5°	9.5	8.7	8.2	7.9	7.6	7.5	7.4	7.3	7.2	7.2	7.1	17.7	97.9
30,0°	8.7	8.0	7.6	7.3	7.1	7.0	6.9	6.8	6.8	6.7	6.7	19.6	117.4
32,5°	7.8	7.4	7.0	6.8	6.6	6.5	6.3	6.2	6.1	6.0	6.0	21.9	139.4
35,0°	7.2	6.9	6.6	6.3	6.1	5.9	5.8	5.6	5.5	5.5	5.5	24.4	163.8
37,5°	6.8	6.4	6.1	5.8	5.5	5.4	5.3	5.2	5.1	5.0	5.0	26.5	190.2
40,0°	6.4	6.0	5.6	5.3	5.2	5.1	5.0	5.0	4.9	4.8	4.8	28.6	218.8
42,5°	6.1	5.7	5.4	5.1	4.9	5.0	4.9	4.8	4.6	4.5	4.5	31.9	250.7
45,0°	5.6	5.2	5.0	4.8	4.7	4.8	4.7	4.5	4.4	4.3	4.2	37.7	288.5
47,5°	5.0	4.7	4.5	4.4	4.4	4.4	4.4	4.3	4.2	4.2	4.1	45.9	334.4
50,0°	4.4	4.3	4.2	4.1	4.1	4.2	4.2	4.2	4.1	4.1	4.1	56.8	391.1
52,5°	4.0	4.0	3.9	3.9	4.0	4.0	4.0	4.0	4.0	4.0	4.0	69.1	460.2
55,0°	3.6	3.6	3.8	3.8	3.9	3.9	3.9	3.9	4.0	4.0	3.9	82.6	542.8
57,5°	3.2	3.4	3.6	3.8	3.8	3.8	3.9	3.9	3.9	3.9	3.9	96.3	639.1
60,0°	2.9	3.1	3.5	3.7	3.8	3.8	3.8	3.8	3.8	3.8	3.7	103.9	743.1
62,5°	2.6	3.0	3.4	3.5	3.7	3.7	3.6	3.6	3.6	3.6	3.6	95.6	838.6
65,0°	2.5	3.0	3.3	3.4	3.5	3.5	3.4	3.4	3.4	3.4	3.4	75.8	914.5
67,5°	2.4	2.8	3.0	3.1	3.2	3.2	3.2	3.2	3.2	3.2	3.2	46.2	960.7
70,0°	2.2	2.5	2.7	2.9	3.0	3.0	3.0	3.0	2.9	2.9	2.9	22.7	983.4
72,5°	2.0	2.3	2.5	2.7	2.9	2.7	2.6	2.6	2.6	2.5	2.5	9.5	992.9
75,0°	1.7	2.0	2.2	2.3	2.3	2.3	2.2	2.2	2.2	2.1	2.1	4.2	997.1
77,5°	1.4	1.6	1.7	1.7	1.8	1.8	1.8	1.8	1.8	1.7	1.7	1.5	998.6
80,0°	1.1	1.2	1.3	1.3	1.3	1.4	1.4	1.4	1.4	1.4	1.3	0.8	999.4
82,5°	0.8	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.4	999.8
85,0°	0.5	0.5	0.5	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.2	999.9
87,5°	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779729X02FB EAN: 4069025145444	LP number 59552_285
Dimming levels table environmental temperature: 10°C		

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	----	----	----
95	238	157915	1454.6
90	222	149637	1355.3
85	207	141555	1263.0
80	192	133118	1170.9
75	177	124511	1078.7
70	163	116157	993.2
65	150	108152	914.8
60	137	99875	836.0
55	124	91385	757.5
50	112	83430	685.5
45	99	74599	608.0
40	87	66236	536.3
35	76	58370	471.6
30	65	50140	406.5
25	53	41298	335.2
20	42	33046	271.8
15	31	24642	210.1
10	21	16787	147.5
5	10	8157	77.5
1	3	2349	32.8

Dimming levels table	environmental temperature: 25°C
----------------------	---------------------------------

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	----	----	----
95	----	----	----
90	----	----	----
85	----	----	----
85	205	140474	1241.8
80	190	132142	1150.3
75	175	123687	1058.8
70	161	115411	973.8
65	148	107477	895.4
60	135	99263	817.3
55	122	90792	739.3
50	110	82847	668.0
45	97	74051	591.0
40	86	66293	525.8
35	74	57755	455.8
30	63	49391	391.4
25	52	41195	326.5
20	41	32837	263.7
15	31	25111	208.1
10	20	16310	138.8
5	10	8337	76.8
1	3	2404	32.5

Photometric test report

Family Floodlight FL11	Order number: 5XA779729X02FB EAN: 4069025145444	LP number 59552_285
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
10.0	166370.0	1560.6
25.0	140990.0	1248.0