

Photometric test report

Family
Highbay 11

Order number: 51HN11DB3TDA
EAN: 4069025424310

LP number
59711_414

serial
documentation
10.04.2025

siteco



Version primary light control with lens, PMMA, housing, white, narrow distribution

Lamps LED 3000 K | CRI ≥ 80

Controlgear ECG-DALI

Setting AC-mode


Rated values Net luminous flux = 53070 lm
Power consumption = 295.1 W
Luminous efficacy = 179.8 lm/W

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 2679 cd/klm

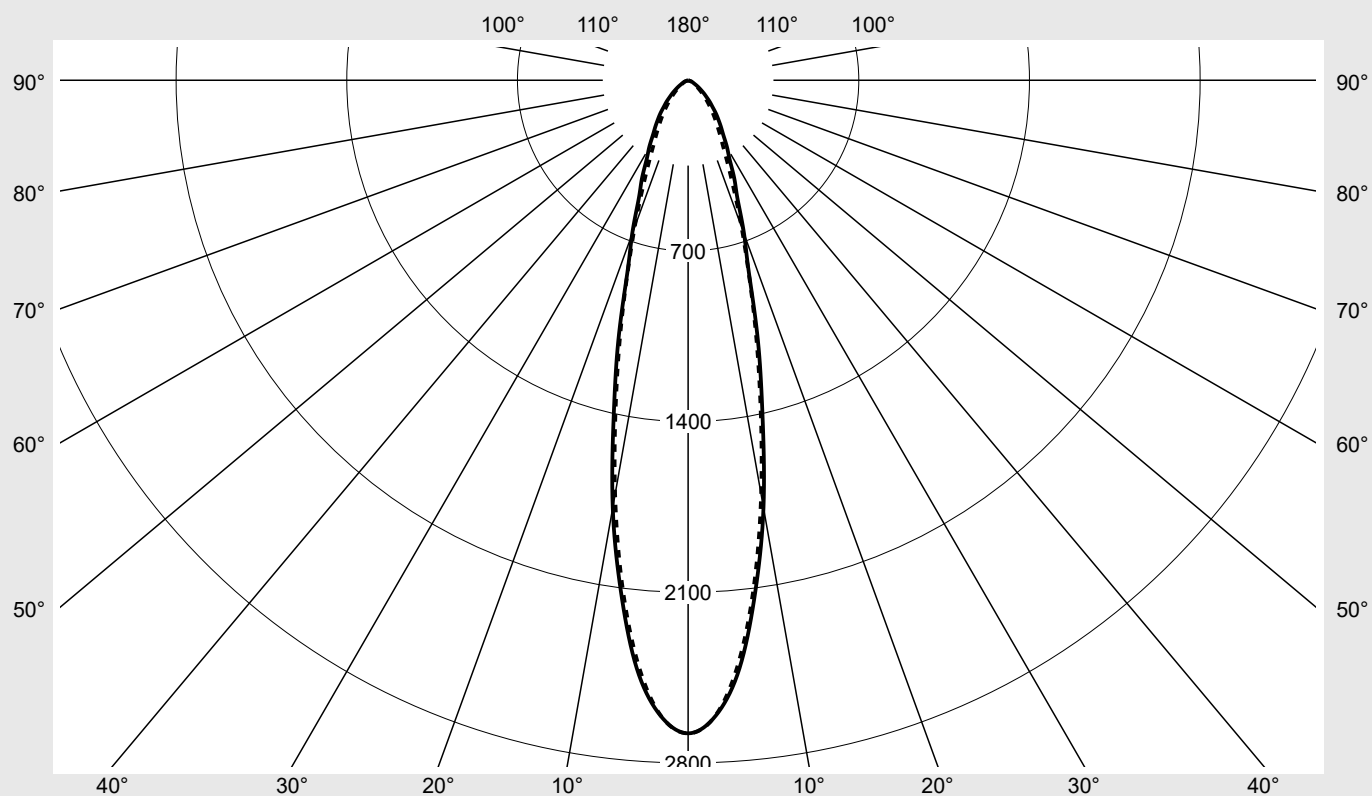

Classifications

DIN 5040 A 7 0
CIE N1=85 N2=97 N3=100
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Highbay 11	Order number: 51HN11DB3TDA EAN: 4069025424310	LP number 59711_414
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0,0°	2678.6	2678.6	2678.6	2678.6	2678.6	2678.6	2678.6	4.0	4.0
2,5°	2608.0	2619.4	2619.4	2616.5	2617.6	2616.2	2606.1	31.3	35.3
5,0°	2420.1	2415.7	2414.1	2408.4	2406.6	2402.3	2391.7	57.6	92.8
7,5°	2113.4	2116.1	2112.3	2103.0	2097.6	2090.5	2079.6	75.2	168.1
10,0°	1780.1	1768.7	1762.7	1751.6	1743.6	1735.2	1724.7	83.4	251.5
12,5°	1410.1	1409.3	1404.7	1395.9	1388.1	1380.5	1373.1	82.8	334.3
15,0°	1106.5	1097.8	1095.0	1089.4	1083.1	1078.4	1073.9	77.3	411.5
17,5°	830.1	840.2	835.5	831.1	826.6	824.9	824.1	68.5	480.0
20,0°	671.1	661.9	651.8	643.2	639.9	639.4	641.0	60.8	540.8
22,5°	531.9	530.5	514.2	498.9	497.0	496.6	496.8	53.4	594.2
25,0°	450.6	441.3	420.6	401.3	399.0	395.8	392.4	47.9	642.1
27,5°	370.8	368.7	351.4	331.7	326.8	321.1	316.0	43.1	685.2
30,0°	320.4	312.1	300.8	284.1	278.0	270.2	264.7	39.7	724.9
32,5°	271.0	266.8	259.0	245.6	238.0	229.0	224.7	36.5	761.4
35,0°	235.8	228.9	222.7	210.5	201.6	193.0	191.7	33.3	794.7
37,5°	204.4	197.8	191.5	181.1	172.0	164.3	162.4	30.3	825.0
40,0°	176.7	170.7	163.1	154.3	146.1	138.3	135.6	27.3	852.2
42,5°	147.6	145.5	138.6	130.6	123.2	115.8	113.3	24.2	876.4
45,0°	126.0	121.8	116.3	109.0	102.0	95.3	93.2	21.1	897.6
47,5°	103.2	101.5	97.1	90.9	84.6	78.4	76.7	18.3	915.9
50,0°	85.9	82.9	79.4	74.6	69.1	63.7	61.9	15.5	931.4
52,5°	69.0	67.2	64.5	61.0	56.2	51.6	49.7	13.0	944.4
55,0°	55.6	54.1	52.2	49.5	45.7	41.7	40.0	10.9	955.3
57,5°	43.6	43.1	41.8	39.8	37.0	33.6	32.2	9.0	964.3
60,0°	33.2	33.3	33.9	32.4	30.5	27.5	26.1	7.4	971.7
62,5°	25.9	26.0	27.0	26.2	25.1	22.4	21.3	6.1	977.8
65,0°	21.6	21.2	21.7	21.3	20.9	18.8	17.7	5.1	982.9
67,5°	17.0	17.1	17.8	17.0	17.3	15.6	14.8	4.3	987.2
70,0°	13.5	13.4	14.4	13.6	14.1	13.0	12.4	3.5	990.7
72,5°	11.0	10.8	10.9	10.9	11.0	10.7	10.6	2.8	993.5
75,0°	9.0	8.4	8.4	8.3	8.6	9.0	8.9	2.3	995.8
77,5°	6.6	6.4	6.2	6.2	6.6	7.3	7.4	1.8	997.5
80,0°	4.4	4.2	4.1	4.2	4.7	5.7	5.8	1.3	998.8
82,5°	2.0	2.1	2.2	2.4	3.0	3.9	4.1	0.8	999.6
85,0°	0.8	0.8	0.8	1.0	1.5	2.2	2.4	0.4	999.9
87,5°	0.3	0.3	0.3	0.3	0.3	0.4	0.5	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Highbay 11			Order number: 51HN11DB3TDA EAN: 4069025424310							LP number 59711_414	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	20.9	22.1	21.2	22.4	22.7	19.7	20.9	20.0	21.2	21.5
	3H	21.1	22.1	21.5	22.5	22.8	20.0	21.0	20.4	21.3	21.7
	4H	21.2	22.1	21.6	22.5	22.9	20.1	21.1	20.5	21.4	21.8
	6H	21.2	22.1	21.7	22.4	22.8	20.3	21.1	20.7	21.5	21.9
	8H	21.3	22.0	21.7	22.4	22.8	20.4	21.1	20.8	21.5	21.9
	12H	21.3	21.9	21.7	22.3	22.7	20.4	21.1	20.8	21.4	21.9
4H	2H	20.9	21.9	21.3	22.2	22.6	19.9	20.8	20.3	21.2	21.6
	3H	21.3	22.0	21.7	22.4	22.8	20.3	21.1	20.7	21.5	21.9
	4H	21.4	22.1	21.8	22.5	22.9	20.5	21.2	20.9	21.6	22.0
	6H	21.4	22.0	21.9	22.5	22.9	20.7	21.3	21.1	21.7	22.2
	8H	21.4	21.9	21.9	22.4	22.9	20.8	21.3	21.2	21.7	22.2
	12H	21.4	21.8	21.9	22.3	22.8	20.8	21.2	21.3	21.7	22.2
8H	4H	21.4	21.9	21.8	22.3	22.8	20.5	21.0	21.0	21.5	21.9
	6H	21.4	21.9	21.9	22.3	22.9	20.7	21.2	21.2	21.6	22.1
	8H	21.4	21.8	21.9	22.3	22.8	20.8	21.2	21.3	21.7	22.2
	12H	21.4	21.7	21.9	22.2	22.7	20.9	21.2	21.4	21.7	22.3
12H	4H	21.3	21.8	21.8	22.2	22.7	20.5	20.9	21.0	21.4	21.9
	6H	21.4	21.8	21.9	22.3	22.8	20.7	21.1	21.2	21.6	22.1
	8H	21.4	21.7	21.9	22.2	22.8	20.8	21.1	21.3	21.6	22.2

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 852 B = 264	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45,0°	42038.7	40635.3	38804.8	36377.7	34035.3	31808.7	31096.6
50,0°	31515.1	30418.0	29129.6	27400.0	25345.6	23366.4	22704.9
55,0°	22867.5	22248.4	21477.5	20362.0	18793.5	17154.2	16464.8
60,0°	15689.7	15706.7	15998.8	15285.3	14376.4	12970.7	12323.3
65,0°	12046.2	11842.9	12111.5	11915.5	11663.7	10481.8	9907.9
70,0°	9333.0	9220.5	9905.5	9354.3	9707.6	8937.0	8541.0
75,0°	8181.7	7678.5	7695.8	7591.9	7832.6	8167.1	8152.5
80,0°	5968.9	5747.5	5560.0	5660.5	6324.9	7680.9	7837.2
85,0°	2209.0	2181.9	2282.1	2579.9	3960.5	5831.2	6608.1

Photometric test report

Family
Highbay 11

Order number: 51HN11DB3TDA
EAN: 4069025424310

LP number
59711_414

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

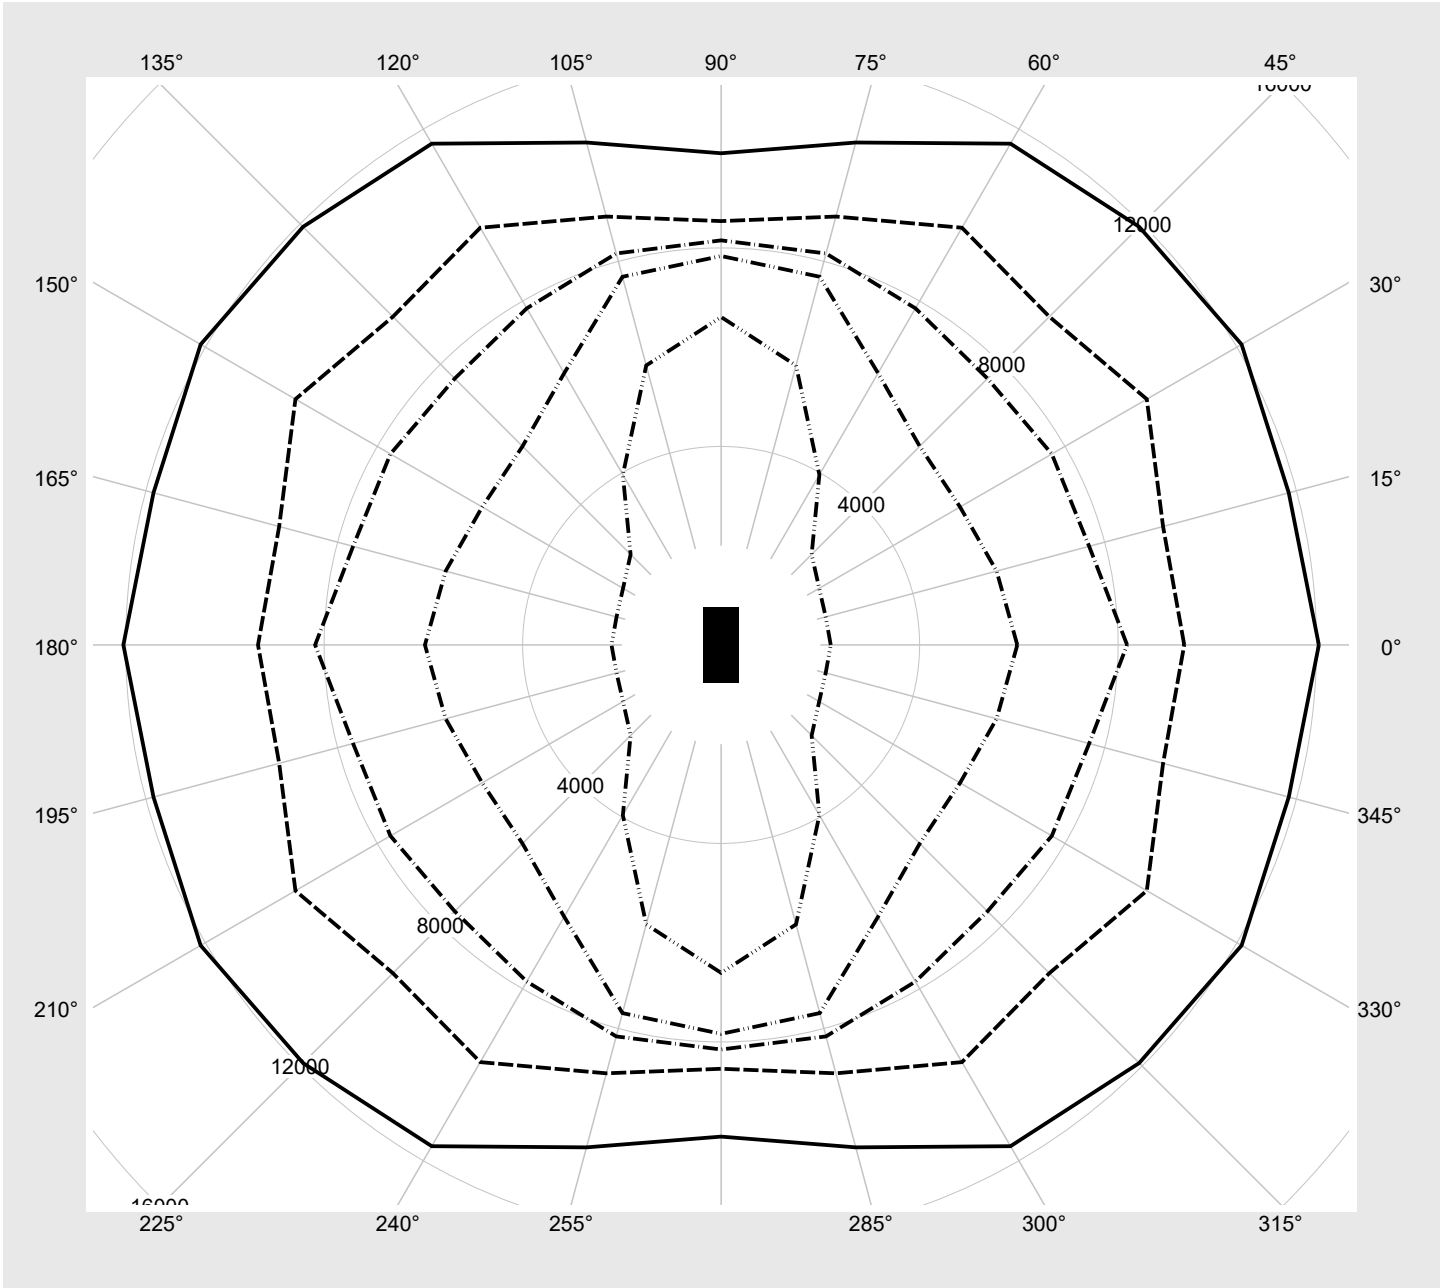

Photometric test report

Family Highbay 11	Order number: 51HN11DB3TDA EAN: 4069025424310	LP number 59711_414
Dimming levels table		environmental temperature: 25°C
		siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	53070	295.1
95	240	252	50458	278.0
90	226	250	47744	261.1
85	212	247	45038	244.1
80	199	245	42486	228.3
75	185	242	39704	211.8
70	172	240	37094	196.4
65	159	237	34457	181.0
60	146	234	31782	165.9
55	133	230	29089	150.8
50	121	227	26588	137.0
45	108	223	23861	122.3
40	96	218	21311	108.4
35	83	213	18512	93.8
30	71	207	15912	80.5
25	59	201	13282	67.3
20	47	192	10613	54.1
15	35	181	7921	41.2
10	23	166	5200	28.1
5	12	142	2676	15.7
2	5	110	1061	7.9