

Order No.: 5MZ323D04WA | GTIN (EAN): 4058352124918


Product description: Scri11,LED12070lm840,DA,L2426,sp




Scriptus® 11, office luminaire, primary optical cover: lenses, CAT 2 ($L \leq 3000 \text{cd/m}^2$), light emission: direct/indirect distribution, primary light characteristic: symmetric, installation type: suspended mounting, LED, rated luminous flux: 12.070lm, luminous efficacy: 133lm/W, light colour: 840, colour temperature: 4000K, control gear: DALI, with terminal, 5-pole, mains connection: 230V, AC, 50Hz, rated input power: 91W, LED, control gear: ECG DALI, housing, luminaire housing, of aluminium, traffic white (RAL 9016), length: 2.426mm, width: 114mm, height: 57mm, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, protection symbol: F, permissible operating ambient temperature: 0...+35°C, standard: EN 50419, packaging unit: 1 piece

4058352124918
5MZ323D04WA

LED 4000K / CRI ≥ 80 Φ_H 7230 lm



Lamps: LED
Lamps 2: LED
Wt. (kg): 8.1
GTIN (EAN): 4058352124918

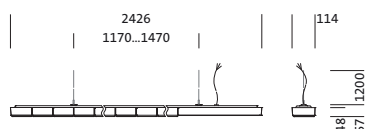

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5MZ323D04WA | **GTIN (EAN):** 4058352124918

Detailed technical description: Scri11,LED12070lm840,DA,L2426,sp



Key data

- Product type: office luminaire
- Product name: Scriptus® 11
- Order No.: 5MZ323D04WA

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Cover: lenses
- Symmetry: symmetric
- Light emission: direct/indirect distribution
- UGR viewing direction along longitudinal luminaire axis: ≤ 19
- UGR viewing direction along lateral luminaire axis: ≤ 19

Lamps:

- Lamps: with LED

Operating device:

- Control gear: ECG DALI

Component 2

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Protection symbol: F
- Temperature range (operation): 0...+35°C
- Standard: EN 50419
- Certification, designation: CE, ENEC, VDE

Material, Colour

- housing: aluminium, traffic white (RAL 9016)
- luminaire housing: aluminium, traffic white (RAL 9016)
- Colour specification: traffic white (RAL 9016)
- Cover: lenses

Mounting

- Mounting method, mounting location: suspended mounting, to wire
- Arrangement: single arrangement

Electrical connection

- Connection: terminal, 5-pole
- Nominal voltage: 230V, 230...240V, 50Hz, AC

Dimensions, Weight


- Length: 2426mm
- Width: 114mm
- Height: 57mm
- Weight: 8.1kg

Service life

- Rated service life: 50000h (L85/B50) at AT = 25°C

Order No.: 5MZ323D04WA | **GTIN (EAN):** 4058352124918

Dimensions: Scri11,LED12070lm840,DA,L2426,sp

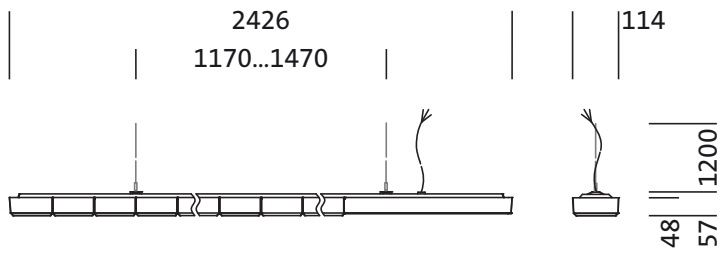

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)


Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5MZ323D04WA | GTIN (EAN): 4058352124918

Planning data: Scri11,LED12070lm840,DA,L2426,sp

5MZ323D04WA: 1x LED
4000K / CRI ≥ 80; individual
setting: only direct light

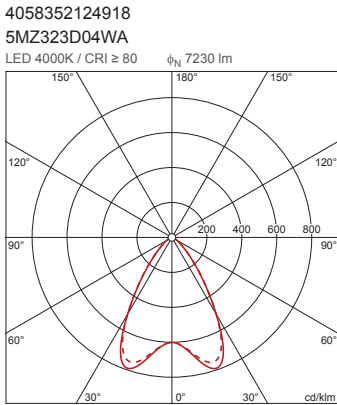


ϕ_L 100% ϕ_T 0%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	1962	2003
L ₇₀	2485	2523
L ₆₅	2706	2848

UGR 17.2 17.4
X 4H Y 8H ρ 70/50/20 S 0.25H

5MZ323D04WA: 1x LED
4000K / CRI ≥ 80; individual
setting: only indirect light

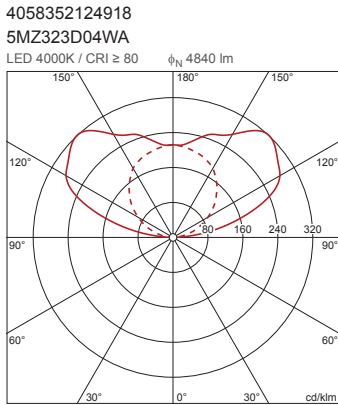


ϕ_L 0% ϕ_T 100%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	0	0
L ₇₀	0	0
L ₆₅	0	0

5MZ323D04WA: 1x LED
4000K / CRI ≥ 80; factory
setting: direct and indirect
light

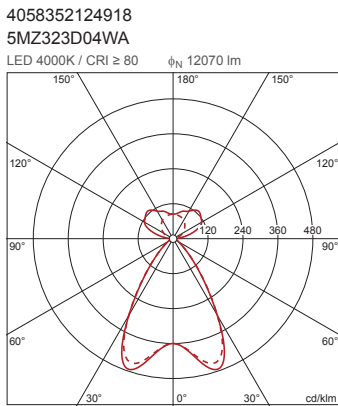

ϕ_L 60% ϕ_T 40%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	1962	2003
L ₇₀	2485	2523
L ₆₅	2707	2849

UGR 14.1 14.2
X 4H Y 8H ρ 70/50/20 S 0.25H