

**Order No.:** 51MAUVC | **GTIN (EAN):** 4058352493861


**Product description:** UVC-DisinUVC-disinf,4x60/95W,TCLEL-UV



UVC Air Disinfectant, UVC air disinfection device, installation type: surface-mounted, for 4x TC-LEL-UV, 60/95W, compact fluorescent lamp UV-C, control gear: ON/OFF, with terminal, 3-pole, max. 2.5mm<sup>2</sup>, mains connection: 220..240V, AC, 50Hz, rated input power: max. 360W, housing, of stainless steel, white, length: 585mm, width: 585mm, height: 102mm, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, permissible operating ambient temperature: - 5..+35°C, packaging unit: 1 piece

IP 20  

Lamps:	4x TC-LEL-UV 60/95W
Socket:	2G11
Wt. (kg):	7.2
GTIN (EAN):	4058352493861

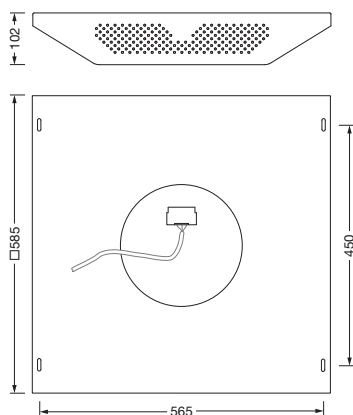

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 51MAUVC | **GTIN (EAN):** 4058352493861

**Detailed technical description:** UVC-DisinUVC-disinf,4x60/95W,TCLEL-UV



#### Key data

- Product type: UVC air disinfection device
- Product name: UVC Air Disinfector
- Order No.: 51MAUVC
- Supplement: airflow: 385m<sup>3</sup>/h, recommended number of devices (with a room height of 2.55m) with 6-fold air circulation per hour: 1 device for every 25m<sup>2</sup> room area

#### Lighting technology | Lamps | Control gear

##### Component 1

##### Lamps:

- Lamps: with compact fluorescent lamp UV-C, 4x TC-LEL-UV 60/95W
- Socket: 2G11
- Rated input power: max. 360W

##### Operating device:

- Control gear: ECG
- Control: ON/OFF

##### Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Temperature range (operation): - 5...+35°C
- Certification, designation: CE

##### Material, Colour

- housing: stainless steel, white
- Colour specification: white

##### Mounting

- Mounting method, mounting location: surface-mounted, to the ceiling / to the wall

##### Electrical connection

- Connection: terminal, 3-pole, max. 2.5mm<sup>2</sup>
- Nominal voltage: 220..240V, 50Hz, AC

##### Dimensions, Weight

- Length: 585mm
- Width: 585mm
- Height: 102mm
- Weight: 7.2kg


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 51MAUVC | **GTIN (EAN):** 4058352493861

**Dimensions:** UVC-DisinUVC-disinf,4x60/95W,TCLEL-UV

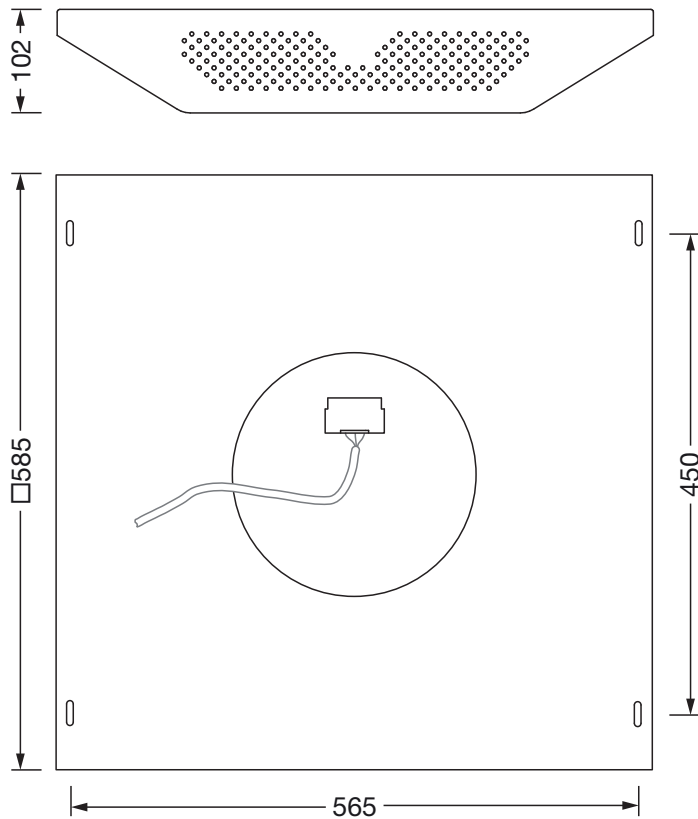

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -