

Order No.: 5MZ312D04WA | **GTIN (EAN):** 4058352065129

Product description: Scri11,LED8020lm840,DA,L1658,sp




Scriptus® 11, office luminaire, primary optical cover: lenses, CAT 2 ($L \leq 3000 \text{cd/m}^2$), light emission: direct/indirect distribution, primary light characteristic: symmetric, installation type: suspended mounting, LED, rated luminous flux: 8.020lm, luminous efficacy: 130lm/W, light colour: 840, colour temperature: 4000K, control gear: DALI, with terminal, 5-pole, mains connection: 230V, AC, 50Hz, rated input power: 62W, LED, control gear: ECG DALI, housing, luminaire housing, of aluminium, traffic white (RAL 9016), length: 1.658mm, width: 114mm, height: 57mm, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, protection symbol: F, permissible operating ambient temperature: 0...+35°C, standard: EN 50419, packaging unit: 1 piece


4058352065129
5MZ312D04WA

LED 4000K / CRI ≥ 80

Φ_{N} 3210 lm



Lamps: LED
Lamps 2: LED
Wt. (kg): 5.8
GTIN (EAN): 4058352065129

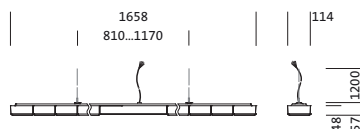

Order No.: 5MZ312D04WA | **GTIN (EAN):** 4058352065129

Detailed technical description: Scri11,LED8020lm840,DA,L1658,sp



Key data

- Product type: office luminaire
- Product name: Scriptus® 11
- Order No.: 5MZ312D04WA

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Cover: lenses
- Symmetry: symmetric
- Light emission: direct/indirect distribution
- UGR viewing direction along longitudinal luminaire axis: ≤ 16
- UGR viewing direction along lateral luminaire axis: ≤ 16

Lamps:

- Lamps: with LED

Operating device:

- Control gear: ECG DALI

Component 2

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Protection symbol: F
- Temperature range (operation): 0...+35°C
- Standard: EN 50419
- Certification, designation: CE, ENEC, VDE

Material, Colour

- housing: aluminium, traffic white (RAL 9016)
- luminaire housing: aluminium, traffic white (RAL 9016)
- Colour specification: traffic white (RAL 9016)
- Cover: lenses

Mounting

- Mounting method, mounting location: suspended mounting, to wire
- Arrangement: single arrangement

Electrical connection

- Connection: terminal, 5-pole
- Nominal voltage: 230V, 230...240V, 50Hz, AC

Dimensions, Weight


- Length: 1658mm
- Width: 114mm
- Height: 57mm
- Weight: 5.8kg

Service life

- Rated service life: 50000h (L85/B50) at AT = 25°C

Order No.: 5MZ312D04WA | **GTIN (EAN):** 4058352065129

Dimensions: Scri11,LED8020lm840,DA,L1658,sp

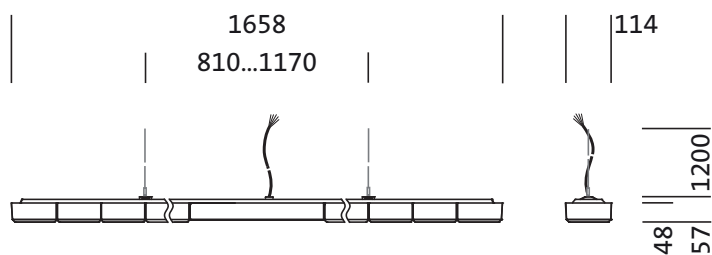

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)


Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 09.04.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5MZ312D04WA | GTIN (EAN): 4058352065129

Planning data: Scri11,LED8020lm840,DA,L1658,sp

5MZ312D04WA: 1x LED
4000K / CRI ≥ 80; individual
setting: only direct light

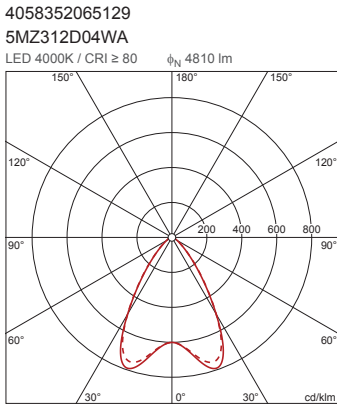


ϕ_L 100% ϕ_T 0%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	1958	1999
L ₇₀	2480	2518
L ₆₅	2701	2843

UGR 17.2 17.4
X 4H Y 8H ρ 70/50/20 S 0.25H

5MZ312D04WA: 1x LED
4000K / CRI ≥ 80; individual
setting: only indirect light

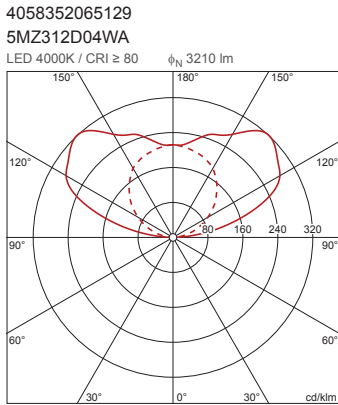


ϕ_L 0% ϕ_T 100%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	0	0
L ₇₀	0	0
L ₆₅	0	0

5MZ312D04WA: 1x LED
4000K / CRI ≥ 80; factory
setting: direct and indirect
light

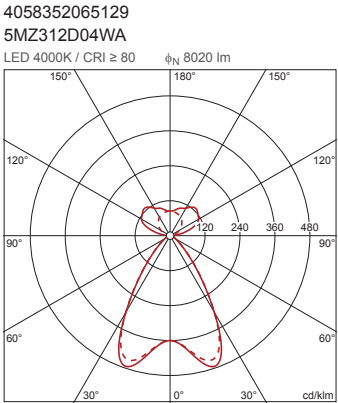

ϕ_L 60% ϕ_T 40%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	1957	1998
L ₇₀	2478	2516
L ₆₅	2699	2840

UGR 14.1 14.2
X 4H Y 8H ρ 70/50/20 S 0.25H