

**Order No.:** 59US1HXSPR2A | **GTIN (EAN):** 4058352361979


**Product description:** SConsens,PIR-sens,SI



SITECO ConnectSensor-Head PR2-S, slave, local control - self-sufficient standalone sensors, central control - connection to lighting or building management, dimmable, installation type: slip-in mounting, installation location: to the ceiling, to the Modario® trunking rail, to the Licross® trunking rail, of plastic, protection rating (complete): IP54, certification: CE, VDE, 1 x PIR movement sensor, 1 x light sensor, packaging unit: 1 piece



Wt. (kg): 0.1  
GTIN (EAN): 4058352361979



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 31.05.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 59US1HXSPR2A | **GTIN (EAN):** 4058352361979

**Detailed technical description:** SConsens,PIR-sens,SI



#### Key data

- System family: Siteco Connect 11, DALI-2, SITECO Connect, SITECO Connect 22
- Product type: sensor
- Product name: SITECO Connect
- Order No.: 59US1HXSPR2A

#### Lighting technology | Lamps | Control gear

#### Component 1

##### Operating device:

- Control: DALI 2, dimmable

##### Certificates, Standards

- Protection rating: IP54
- Temperature range (operation): - 20..+50°C
- Certification, designation: CE, VDE

##### Material, Colour

- housing: plastic, white
- Colour specification: white

##### Mounting

- Mounting method, mounting location: slip-in mounting, to the ceiling, to the Modario® trunking rail, to the Licross® trunking rail
- Mounting height: 4..14m
- Supplement: only suitable for use in indoor areas

##### Dimensions, Weight

- Length: 95mm
- Width: 95mm
- Height: 65mm
- Weight: 0.1kg

##### Inputs

##### 1x PIR movement sensor

- Connection: system connector
- Detection range: max. 30x4m
- Option: 5 detection levels, 120 switching zones
- Feature: rectangular detection area

##### 1x light sensor

- Feature: light sensor with 'local control' without function



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 31.05.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 59US1HXSPR2A | GTIN (EAN): 4058352361979

Dimensions: SConsens,PIR-sens,SI

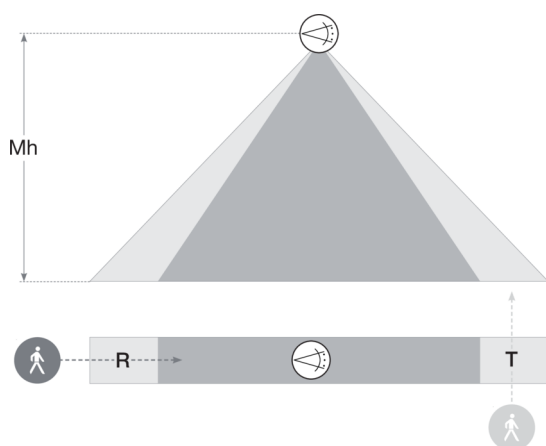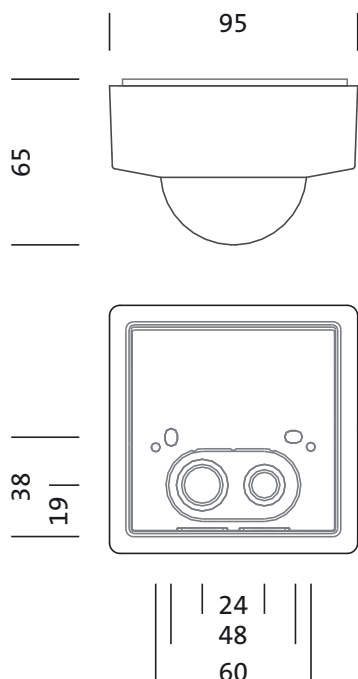

## Sensor Head PR2

Mh	R	T
14m	30 x 4m	30 x 4m
12m	30 x 4m	30 x 4m
10m	25 x 4m	25 x 4m
8m	20 x 4m	20 x 4m
6m	15 x 4m	15 x 4m
4m	10 x 4m	10 x 4m

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 31.05.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -