

Order No.: 56TL1FAMA | GTIN (EAN): 4058352400524


Product description: LicIntbasemod



Licross® Interface MS, master, local control, switchable, installation location: to the Licross® trunking rail, of sheet steel, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, UKCA, voltage: 230V, voltage type: AC, 1 x 1 x light control, packaging unit: 1 piece



Wt. (kg): 0.5
GTIN (EAN): 4058352400524

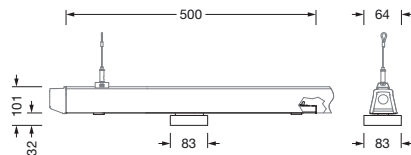

Order No.: 56TL1FAMA | GTIN (EAN): 4058352400524

Detailed technical description: LicIntbasemod



Key data

- System family: SITECO Connect 31 Logistic On/Off
- Product type: base module
- Product name: Licross® Interface
- Order No.: 56TL1FAMA

Lighting technology | Lamps | Control gear

Component 1

Lamps:

- Supplement: halogen-free wiring

Operating device:

- Control: ON/OFF, switchable

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Temperature range (operation): -20..+50°C
- Certification, designation: CE, ENEC, VDE, UKCA

Material, Colour

- trunking rail adapter set: sheet steel, coil coated, white
- Colour specification: white

Mounting

- Supplement: only suitable for indoor use

Electrical connection

- Connection: plug, 4-pole, without phase selection
- Nominal voltage: 230V, 50Hz, AC

Dimensions, Weight

- Length: 500mm
- Width: 96mm
- Height: 97mm
- Weight: 0.5kg


Inputs

1x light control

- Connection: light sensor

Order No.: 56TL1FAMA | GTIN (EAN): 4058352400524

Dimensions: Liclntbasemod

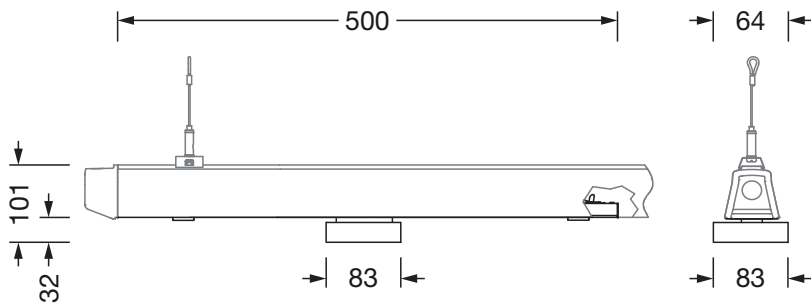

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)
Tolerances related to thermal, electrical and photometric data according to IEC 62722
Issued 16.02.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -