ѕітесо

Order No.: 58FA101 | GTIN (EAN): 4058352706664 Product description: Mon31multisens,PIR-sens,surf






Monsun[®] 31, multi-sensor, installation type: surface-mounted, housing, of PC, light grey (RAL 7035), length: 96mm, width: 68mm, height: 78mm, multi-sensor, protection rating (complete): IP66, insulation class (complete): insulation class II (safety insulation), certification: CE, impact resistance: IK06, permissible operating ambient temperature: -20..+40°C, packaging unit: 1 piece

IP 66	IK 06	CE	

Wt. (kg): 0.1 GTIN (EAN): 40583


4058352706664



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de) Tolerances related to thermal, electrical and photometric data according to IEC 62722 Issued 05.04.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -

ѕітесо

Order No.: 58FA101 | GTIN (EAN): 4058352706664 Detailed technical description: Mon31multisens,PIR-sens,surf

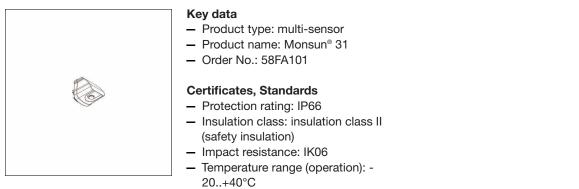

- Certification, designation: CE

Material, Colour

- housing: PC, light grey (RAL 7035)
- Colour specification: light grey (RAL 7035)

Mounting

 Mounting method, mounting location: surface-mounted, to the luminaire

Dimensions, Weight

- Length: 96mm
- Width: 68mm
- Height: 78mm
- Weight: 0.1kg


Inputs

1x PIR movement sensor

- Option: switching time adjustable between 5 seconds - 30 minutes
- Feature: for motion detection, circular detection area
- 1x light sensor
- Option: daylight threshold adjustable from 2..50lx



Order No.: 58FA101 | GTIN (EAN): 4058352706664 Dimensions: Mon31multisens,PIR-sens,surf



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de) Tolerances related to thermal, electrical and photometric data according to IEC 62722 Issued 05.04.2024 - Modifications and errors subject to change - Ensure that you always use the latest version -