# ѕітесо

### Order No.: 59MX2CW100BA | GTIN (EAN): 4058352760499 Product description: Sil21,SensMoPC3S,lokCtrl,PIR-sens






Silica® 21sensor module PC3-S, slave, local control, dimmable, installation arrangement: single/continuous arrangement, installation type: slip-in mounting, installation location: to the luminaire, of extruded aluminium section, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, 1 x PIR movement sensor, 1 x light sensor, packaging unit: 1 piece

IP 20 🛓 🤆

Wt. (kg): 0.3 GTIN (EAN): 4058352760499



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de) Tolerances related to thermal, electrical and photometric data according to IEC 62722 Issued 17.11.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -

# ѕітесо

### Order No.: 59MX2CW100BA | GTIN (EAN): 4058352760499 Detailed technical description: Sil21,SensMoPC3S,lokCtrl,PIR-sens



#### Key data

- System family: SITECO Connect 31 Wireless
- Product type: lighting management components
- Product name: Silica® 21
- Order No.: 59MX2CW100BA

# Lighting technology | Lamps | Control gear

#### Component 1

#### **Operating device:**

 Control: Bluetooth<sup>®</sup> mesh 4.2, dimmable

#### **Certificates, Standards**

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Temperature range (operation): 0..+40°C
- Certification, designation: CE

#### Material, Colour

- housing: extruded aluminium section, anodised, jet black (RAL 9005), for luminaires with opal or prismatic cover
- Colour specification: jet black (RAL 9005)

#### Mounting

- Mounting method, mounting location: slip-in mounting, to the luminaire
- Mounting height: 2.5..5m
- Arrangement: single/continuous arrangement
- Supplement: for surface-mounted luminaires, for pendant luminaires

#### **Dimensions, Weight**

- Length: 127mm
- Width: 53mm
- Height: 54mm
- Weight: 0.3kg


#### Inputs

#### 1x PIR movement sensor

 Connection: PIR sensor (passiveinfrared)



## Order No.: 59MX2CW100BA | GTIN (EAN): 4058352760499 Dimensions: Sil21,SensMoPC3S,lokCtrl,PIR-sens

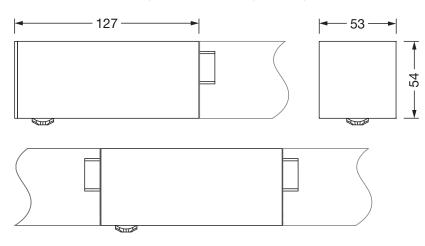

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de) Tolerances related to thermal, electrical and photometric data according to IEC 62722 Issued 17.11.2023 - Modifications and errors subject to change - Ensure that you always use the latest version -