

Order No.: 5XA1565E1F308 | GTIN (EAN): 4069025073792

Product description: LgBelliQ,S120016,4750lm730,SR




Large Bell iQ, mast luminaire, primary light control with 3 zone faceted reflector, of plastic, silver coated, primary optical cover: cover panel, of toughened safety glass, transparent, light distribution: S120016, primary beam angle: wide distribution, light emission: direct distribution, primary light characteristic: asymmetric, installation type: suspended mounting, lamps: LED, rated values: 4.750lm | 34,3W | 138,5lm/W (begin service life); end service life: 4.750lm | 37,7W; at 50% lumin. flux: 2.375lm | 15,5W | 153,2lm/W, colour temperature: 3000K, colour rendering: CRI > 70, light colour: 730, light setting 1 (further light settings possible): 100% | 4.750lm | 34,3W | 138,5lm/W | 3.000K (begin service life); end service life: 37,7W, control gear: iQ Street-Remote, control: optimised constant luminous flux control (CLO 2.0), Desk-Remote (wireless, voltage-free reading and setting of iQ features in the workshop via application-optimized NFC function/RFID function), Light-Fading, Smart-Wire, Night-Set, Lumen-Switch, Temp-Guard, Auto-Match, Street-Remote, pre-setting: logarithmic dimming characteristic, pre-setting: linear dimming characteristic, mains connection: 220..240V, AC, 50/60Hz, surge voltage resistance: surge voltage resistance: 10kV (common mode); 6kV (differential mode), luminaire housing, bell-shaped, of glass-fibre reinforced polyester, coated, SITECO metallic grey (DB 702S), please order curved mast extension separately, diameter: 530mm, height: 695mm, protection rating (complete): IP54, insulation class (complete): insulation class II (safety insulation), certification: CE, ENEC, VDE, impact resistance: IK09, standard-compliant lighting for roads and squares, packaging unit: 1 piece



Lamps:	LED
Wt. (kg):	8.9
GTIN (EAN):	4069025073792

S = 0.13m<sup>2</sup>



Order No.: 5XA1565E1F308 | GTIN (EAN): 4069025073792

Detailed technical description: LgBelliQ,S120016,4750lm730,SR



### Key data

- Product type: mast luminaire
- Product name: Large Bell iQ
- Order No.: 5XA1565E1F308

### Lighting technology | Lamps | Control gear

#### Component 1

#### Lighting technology:

- Light control: 3 zone faceted reflector of plastic, silver coated
- Cover: cover panel, transparent
- Light distribution: S120016
- Beam angle: wide distribution
- Symmetry: asymmetric distribution
- Light emission: direct distribution

#### Lamps:

- Lamps: with LED
- Rated values: 4750lm | 34.3W | 138.5lm/W (begin service life); end service life: 4750lm | 37.7W; at 50% lumin. flux: 2375lm | 15.5W | 153.2lm/W
- Colour temperature: 3000K
- Colour rendering index: CRI > 70
- Light colour: 730
- SDCM (Standard Deviation of Colour Matching): MacAdam  $\leq$  5 SDCM (initial)

#### Factory light settings (LS):

- begin service life:  
LS 1: 100% | 4750lm | 34.3W | 138.5lm/W | 3000K
- end service life:  
LS 1: 37.7W
- further light settings possible

#### Operating device:

- Control: iQ Street-Remote
- Equipment: optimised constant luminous flux control (CLO 2.0), Desk-Remote (wireless, voltage-free reading and setting of iQ features in the workshop via application-optimized NFC function/RFID function), Light-Fading, Smart-Wire, Night-Set, Lumen-Switch, Temp-Guard, Auto-Match, Street-Remote, pre-setting: logarithmic dimming characteristic, pre-setting: linear dimming characteristic

### Certificates, Standards

- Protection rating: IP54
- Insulation class: insulation class II (safety insulation)
- Impact resistance: IK09
- Supplement: standard-compliant lighting for roads and squares
- Certification, designation: CE, ENEC, VDE

### Material, Colour

- luminaire housing: glass-fibre reinforced polyester, coated, SITECO metallic grey (DB 702S), bell-shaped, please order curved mast extension separately
- Cover: cover panel of toughened safety glass

### Mounting

- Mounting method, mounting location: suspended mounting, to curve

### Electrical connection

- Nominal voltage: 220..240V, 50/60Hz, AC
- Surge voltage resistance: surge voltage resistance: 10kV (common mode); 6kV (differential mode)

### Dimensions, Weight

- Diameter: 530mm
- Height: 695mm
- Weight: 8.9kg

### Light emission

- Light emission: < 3%


### Service life

- Rated service life: 80000h (L96/B10) at AT = 25°C

Order No.: 5XA1565E1F308 | GTIN (EAN): 4069025073792

Dimensions: LgBelliQ,S120016,4750lm730,SR

S = 0.13m<sup>2</sup>

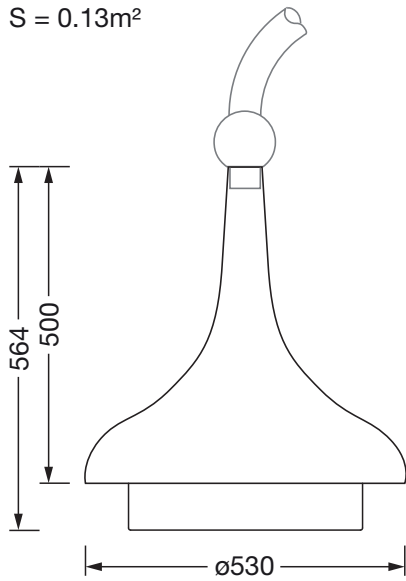

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 13.03.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -