

Order No.: 5LZ950701A | **GTIN (EAN):** 4069025243065


Product description: SCon11HWiGatew,DALI,rec,surf



SITECO Connect 11H Wireless, Gateway, installation type: recessed, surface-mounted, control gear: Bluetooth® Mesh, mains connection: 100..240V, AC, 50/60Hz, housing, of plastic, white, length: 208mm, width: 79mm, height: 30mm, Gateway DALI wireless, local control - self-sufficient standalone sensors, equipment: master, dimmable, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, UKCA, permissible operating ambient temperature: 0..+40°C, packaging unit: 1 piece

IP 20  

Wt. (kg): 0.2
GTIN (EAN): 4069025243065

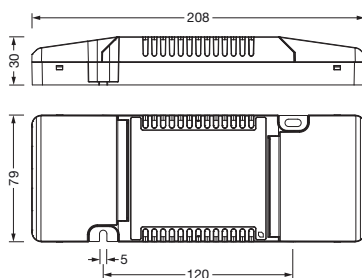

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 06.06.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5LZ950701A | **GTIN (EAN):** 4069025243065

Detailed technical description: SCon11HWiGatew,DALI,rec,surf



Key data

- System family: SITECO Connect 11H Wireless
- Product type: Gateway
- Product name: SITECO Connect 11H Wireless
- Order No.: 5LZ950701A

1x Bluetooth® interface

- Feature: wireless networking

Lighting technology | Lamps | Control gear

Component 1

Operating device:

- Control: Bluetooth® Mesh, dimmable

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Temperature range (operation): 0...+40°C
- Certification, designation: CE, UKCA

Material, Colour

- housing: plastic, white
- Colour specification: white

Mounting

- Mounting method, mounting location: surface-mounted, recessed, to the ceiling, in the ceiling
- Supplement: only suitable for use in indoor areas

Electrical connection

- Nominal voltage: 100...240V, 50/60Hz, AC

Dimensions, Weight

- Length: 208mm
- Width: 79mm
- Height: 30mm
- Weight: 0.2kg

Inputs

1x DALI

- Feature: for connection to a DALI-2 application controller

Outputs


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 06.06.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

Order No.: 5LZ950701A | **GTIN (EAN):** 4069025243065

Dimensions: SCon11HWiGatew,DALI,rec,surf

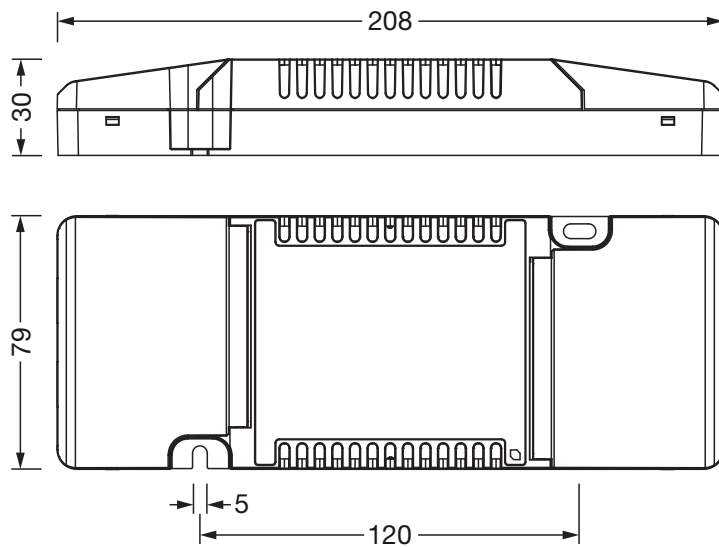

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 06.06.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -