

**Order No.:** 51RE12MA47C | **GTIN (EAN):** 4069025156631


**Product description:** TrFI31,LI,wd,7200lm840,ML,wh



Trunking Flex 31, luminaire insert, of extruded aluminium section, coated, traffic white (RAL 9016), length: 1.172mm, width: 91mm, height: 53mm, LED rated luminous flux: 7.200lm, light colour: 840, SDCM (Standard Deviation of Colour Matching)MacAdam  $\leq 3$  SDCM (initial), control gear: ON/OFF Multilumen, with system connector: socket, mains connection: 220..240V, AC, 50/60Hz, rated input power: 40W, luminous flux adjustable on luminaire in four steps (3700/4800/6000/7200lm), connected load according to luminous flux setting (20/26/33/40W), primary light control with lens, of plastic, primary optical cover: cover, of PMMA, light emission: direct distribution, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, UKCA, impact resistance: IK02, permissible ambient temperature for indoor applications: -20...+40°C, packaging unit: 1 piece

IP 20  

|             |               |
|-------------|---------------|
| Lamps:      | LED           |
| Wt. (kg):   | 1.3           |
| GTIN (EAN): | 4069025156631 |



It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 15.08.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -

**Order No.:** 51RE12MA47C | **GTIN (EAN):** 4069025156631

**Detailed technical description:** TrFI31,LI,wd,7200lm840,ML,wh



#### Key data

- Product type: luminaire insert
- Product name: Trunking Flex 31
- Order No.: 51RE12MA47C

#### Lighting technology | Lamps | Control gear

##### Component 1

#### Lighting technology:

- Light control: lens of plastic
- Cover: cover
- Beam angle: wide distribution
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis:  $\leq 25$
- UGR viewing direction along lateral luminaire axis:  $\leq 25$

#### Lamps:

- Lamps: with LED
- Rated luminous flux: 7200lm
- Luminous efficacy: 180lm/W
- Colour temperature: 4000K
- Colour rendering index: CRI  $> 80$
- Light colour: 840
- SDCM (Standard Deviation of Colour Matching): MacAdam  $\leq 3$  SDCM (initial)
- Rated input power: 40W
- Supplement: luminous flux adjustable on luminaire in four steps (3700/4800/6000/7200lm), connected load according to luminous flux setting (20/26/33/40W)

#### Operating device:

- Control: ON/OFF Multilumen

#### Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK02
- Temperature range (operation): -20...+40°C
- Certification, designation: CE, UKCA

#### Material, Colour

- refurbishment insert: extruded aluminium section, coated, traffic white (RAL 9016)
- Quantity: 1 piece
- Colour specification: traffic white (RAL 9016)
- Cover: cover of PMMA

#### Mounting

- Mounting method, mounting location: slip-in mounting, to the trunking rail
- Arrangement: single/continuous arrangement
- Supplement: only suitable for use in indoor areas

#### Electrical connection

- Connection: system connector: socket
- Nominal voltage: 220...240V, 50/60Hz, AC

#### Dimensions, Weight


- Length: 1172mm
- Width: 91mm
- Height: 53mm
- Weight: 1.3kg

#### Service life

- Rated service life: 50000h (L85/B50) at AT = 25°C

**Order No.:** 51RE12MA47C | **GTIN (EAN):** 4069025156631

**Dimensions:** TrFI31,LI,wd,7200lm840,ML,wh

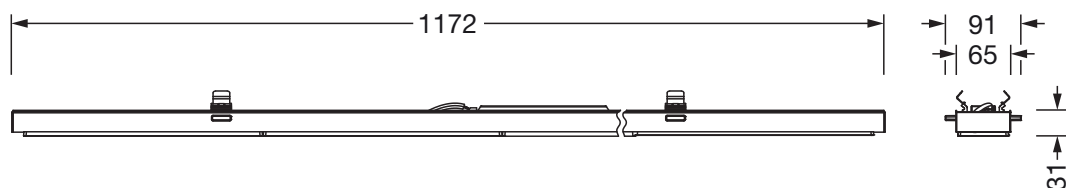

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at [www.siteco.de](http://www.siteco.de))

Tolerances related to thermal, electrical and photometric data according to IEC 62722

Issued 15.08.2025 - Modifications and errors subject to change - Ensure that you always use the latest version -