siteco

**Order No.:** 5LZ980201A | **GTIN (EAN):** 4069025765635

**Product description:** SConWi,multisens,wirel

SITECO Connect Wirelessmulti-sensor, sensor, slave, local control - self-sufficient standalone sensors, sensor technology: 1 PIR movement sensor, daylight sensor, dimmable, installation type: recessed, installation location: in the ceiling, mounting height: 2.5..4m, of plastic, voltage: 230V, 1 x PIR movement sensor, connection: PIR sensor (passive-infrared), feature: circular detection area, detection range (movement): at mounting height (Mh) = 3m: max. ø8m, detection angle: 360°, 1 x light sensor, 1 x Bluetooth interface, protection rating (complete): IP20, insulation class (complete): insulation class II (safety insulation), certification: CE, packaging unit: 1 piece

IP 20

| | |
|---|---|
| Wt. (kg): | 0.1 |
| GTIN (EAN): | 4069025765635 |

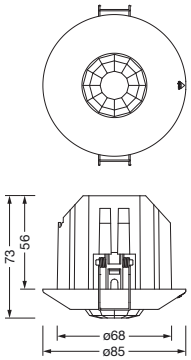


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)
Tolerances related to thermal, electrical and photometric data according to IEC 62722
Issued 13.11.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com

siteco

**Order No.:** 5LZ980201A | **GTIN (EAN):** 4069025765635

**Detailed technical description:** SConWi,multisens,wirel

**Key data**
- System family: SITECO Connect Wireless
- Product type: sensor
- Product name: SITECO Connect Wireless
- Order No.: 5LZ980201A

**Lighting technology | Lamps | Control gear**

**Component 1**

**Operating device:**
- Control: Casambi, dimmable

**Certificates, Standards**
- Protection rating: IP20
- Insulation class: insulation class II (safety insulation)
- Temperature range (operation): 0..+50°C
- Certification, designation: CE

**Material, Colour**
- housing: plastic, white
- housing: plastic, white

**Mounting**
- Mounting method, mounting location: recessed, in the ceiling
- Mounting height: 2.5..4m
- Supplement: only suitable for use in indoor areas

**Electrical connection**
- Nominal voltage: 230V, 50/60Hz

**Dimensions, Weight**
- Height: 73mm
- Weight: 0.1kg

**Inputs**

**1x PIR movement sensor**
- Connection: PIR sensor (passive-infrared)
- Detection angle: 360°
- Detection range: at mounting height (Mh) = 3m: max. ø8m
- Feature: circular detection area

**1x light sensor**
- Illuminance: 1..2000lx (at sensor)

**Outputs**

**1x Bluetooth interface**
- Feature: wireless networking

It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)
Tolerances related to thermal, electrical and photometric data according to IEC 62722
Issued 13.11.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com

siteco

**Order No.:** 5LZ980201A | **GTIN (EAN):** 4069025765635

**Dimensions:** SConWi,multisens,wirel

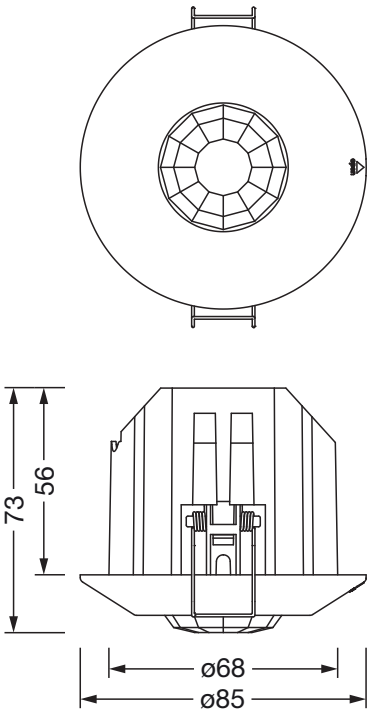


It is mandatory that the assembly instructions must be observed when planning and installing the electrical installation (to be found at www.siteco.de)
Tolerances related to thermal, electrical and photometric data according to IEC 62722
Issued 13.11.2026 - Modifications and errors subject to change - Ensure that you always use the latest version -

Siteco GmbH • Georg-Simon-Ohm-Str. 50 • 83301 Traunreut, Germany • Tel +49(8669)33-0 • Fax +49(8669)33-397 • eMail info@siteco.de • Internet www.siteco.com