




# Photometric test report

<b>Family</b> <b>Licross® 21 Recessed</b>	<b>Order number: 52TE197N48XG</b> <b>EAN: 4058352889985</b>	<b>LP number</b> <b>58532_358</b>
	<b>Version</b> cover frosted, double asymmetric distribution <b>Lamps</b> LED 4000 K   CRI ≥ 80 <b>Controlgear</b> ECG <b>Rated values</b> Net luminous flux = 8450 lm Power consumption = 47.9 W Luminous efficacy = 176.4 lm/W	<b>serial documentation</b> <b>04.08.2023</b>
		

**Luminous intensity in cd/klm** C180-0 C270-90 **Imax: 703 cd/klm**

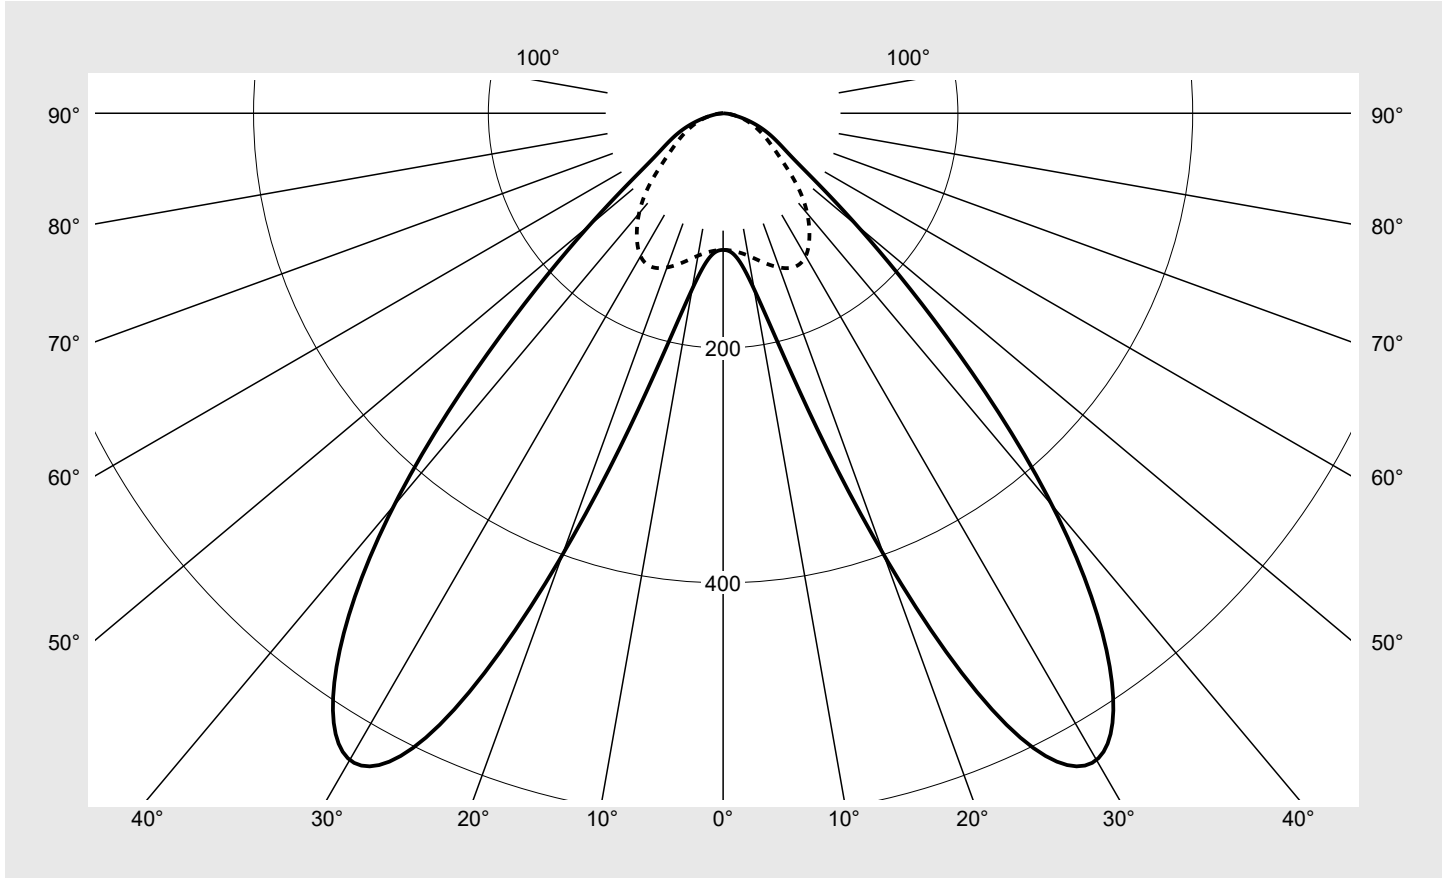

Classifications	
DIN 5040	A 4 0
CIE	N1=55 N2=89 N3=98 N4=100 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	100.0%
$\phi_o$	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

## Photometric test report

Family <b>Licross® 21 Recessed</b>	Order number: <b>52TE197N48XG</b> EAN: <b>4058352889985</b>	LP number <b>58532_358</b>
---------------------------------------	--	-------------------------------

**sITeco**

<b>Table of values for luminous intensities</b>	<b>Maximum luminous intensity</b>
---	-----------------------------------

C-planes $\gamma$	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
0°	116.4	116.4	116.4	116.4	116.4	116.4	116.4	0.7	0.7
5°	122.3	121.8	120.5	120.1	119.3	118.4	118.1	5.7	6.4
10°	152.3	149.6	141.1	133.1	127.4	124.1	123.2	12.9	19.3
15°	235.7	226.2	196.7	164.2	142.2	133.3	131.4	24.7	44.1
20°	400.4	377.8	306.4	227.1	167.8	143.8	139.7	46.6	90.7
25°	577.7	557.7	476.8	343.4	212.9	153.0	144.3	81.3	172.0
30°	636.1	636.8	610.4	517.3	280.0	157.9	140.6	118.3	290.3
35°	573.7	597.7	662.3	665.7	347.9	155.6	128.2	145.7	436.0
40°	436.2	470.5	613.4	703.5	376.1	144.6	111.4	151.6	587.6
45°	268.7	299.8	459.0	605.2	334.0	122.5	91.2	129.2	716.8
50°	149.1	168.3	276.5	419.8	259.3	97.4	69.0	93.1	809.9
55°	85.3	95.5	151.2	245.9	199.7	79.3	53.1	62.9	872.9
60°	59.3	63.7	88.0	138.5	152.7	65.0	42.1	44.2	917.1
65°	44.9	47.0	60.8	84.9	110.7	51.4	33.0	32.6	949.7
70°	31.7	33.1	42.5	56.3	76.3	38.4	24.7	23.6	973.3
75°	19.0	20.1	26.0	34.9	49.6	26.3	17.0	15.4	988.7
80°	8.8	9.4	12.7	18.2	27.0	15.2	9.8	8.3	997.0
85°	3.4	3.6	4.7	6.8	9.5	5.9	3.7	3.1	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Licross® 21 Recessed	<b>Order number: 52TE197N48XG</b> <b>EAN: 4058352889985</b>	<b>LP number</b> 58532_358
---------------------------------------	--	-------------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	24.6	26.2	24.9	26.5	26.8	23.4	25.0	23.8	25.3	25.6
	3H	24.7	26.2	25.1	26.5	26.9	23.7	25.1	24.0	25.5	25.8
	4H	24.8	26.1	25.2	26.5	26.8	23.7	25.1	24.1	25.5	25.8
	6H	24.8	26.0	25.2	26.4	26.8	23.8	25.1	24.2	25.4	25.8
	8H	24.8	26.0	25.2	26.3	26.7	23.8	25.0	24.2	25.4	25.8
	12H	24.8	25.9	25.2	26.3	26.7	23.7	24.9	24.2	25.3	25.7
4H	2H	24.9	26.3	25.3	26.7	27.0	24.1	25.4	24.5	25.8	26.2
	3H	25.2	26.4	25.7	26.8	27.2	24.8	25.9	25.2	26.3	26.7
	4H	25.3	26.3	25.8	26.7	27.2	25.1	26.1	25.5	26.5	26.9
	6H	25.4	26.2	25.8	26.7	27.1	25.2	26.1	25.7	26.5	27.0
	8H	25.4	26.2	25.8	26.6	27.1	25.2	26.0	25.7	26.5	27.0
	12H	25.4	26.1	25.9	26.5	27.0	25.2	26.0	25.7	26.4	26.9
8H	4H	25.5	26.3	25.9	26.7	27.2	25.3	26.1	25.7	26.5	27.0
	6H	25.5	26.2	26.0	26.7	27.2	25.6	26.2	26.1	26.7	27.2
	8H	25.6	26.2	26.1	26.6	27.2	25.7	26.3	26.2	26.7	27.3
	12H	25.6	26.1	26.1	26.6	27.1	25.7	26.2	26.2	26.7	27.2
12H	4H	25.5	26.2	26.0	26.7	27.2	25.3	26.0	25.8	26.4	26.9
	6H	25.6	26.2	26.1	26.7	27.2	25.6	26.2	26.1	26.7	27.2
	8H	25.6	26.1	26.1	26.6	27.2	25.7	26.2	26.2	26.7	27.3

<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm:</b>	<b>L = 1500</b>
			<b>B = 58</b>

C-planes	$\gamma$	Luminance in cd/m <sup>2</sup>						
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
45°		36903.2	41174.2	63049.0	83124.2	45873.0	16827.9	12525.1
50°		22524.0	25436.2	41783.6	63427.7	39183.7	14719.7	10422.6
55°		14450.9	16170.5	25606.6	41644.0	33815.1	13420.6	8985.4
60°		11518.0	12383.2	17096.0	26897.6	29657.6	12635.6	8179.0
65°		10317.6	10812.6	13973.6	19514.3	25446.0	11806.4	7574.2
70°		9013.5	9397.1	12079.3	15974.1	21677.2	10911.9	7009.4
75°		7132.3	7550.8	9766.3	13103.2	18621.5	9876.7	6376.2
80°		4914.8	5230.3	7100.1	10192.6	15097.4	8511.9	5501.0
85°		3841.3	4007.4	5190.9	7524.4	10639.2	6528.2	4172.3

**Photometric test report**

<b>Family</b> <b>Licross® 21 Recessed</b>	<b>Order number: 52TE197N48XG</b> <b>EAN: 4058352889985</b>	<b>LP number</b> <b>58532_358</b>
--	--	--------------------------------------

**Luminance values in cd/m<sup>2</sup>**

$\gamma$  65°   
   $\gamma$  70°   
   $\gamma$  75°   
   $\gamma$  80°   
   $\gamma$  85°

**siteco**

