




Photometric test report

Family Licross® 21 Recessed	Order number: 52TE1E7N485G EAN: 4058352890066	LP number 59263_98
	Version cover frosted, elliptical narrow distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG Rated values Net luminous flux = 8530 lm Power consumption = 47.9 W Luminous efficacy = 178.1 lm/W	serial documentation 04.08.2023
		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 1670 cd/klm**

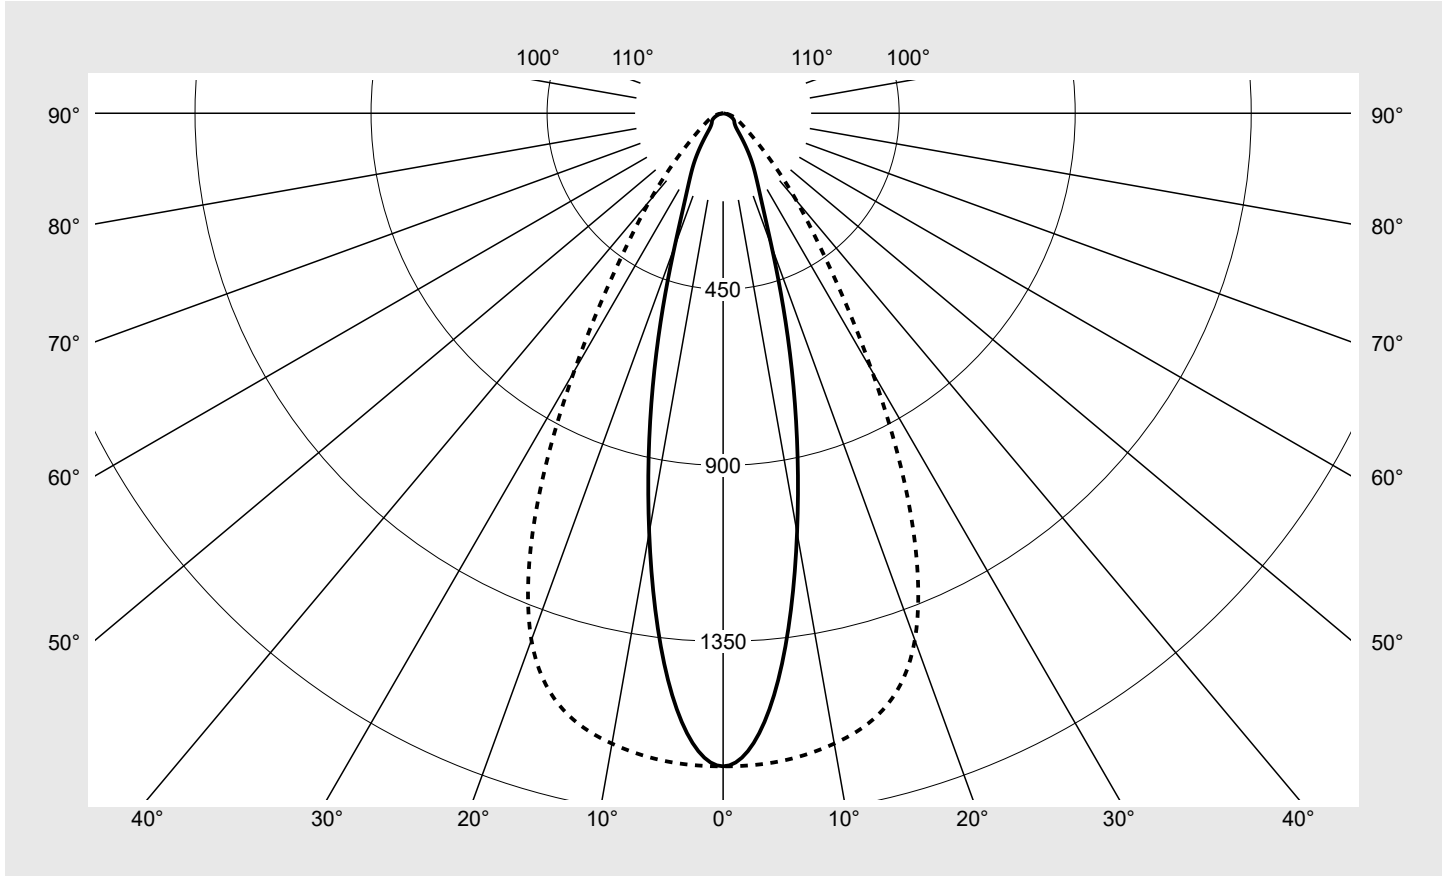

Classifications	
DIN 5040	A 7 0
CIE	N1=85 N2=95 N3=99 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE1E7N485G EAN: 4058352890066	LP number 59263_98
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	1669.5	1669.5	1669.5	1669.5	1669.5	1669.5	1669.5	10.0	10.0
5°	1493.3	1495.6	1516.6	1565.9	1616.3	1649.8	1662.9	75.0	85.0
10°	1088.5	1106.7	1175.0	1303.4	1460.6	1586.1	1636.2	126.8	211.8
15°	678.3	712.7	825.0	1006.5	1239.9	1474.8	1578.7	151.0	362.9
20°	362.1	388.9	492.0	707.6	980.6	1275.8	1432.9	148.2	511.0
25°	217.8	231.1	285.8	436.7	705.9	972.9	1137.5	127.8	638.8
30°	151.3	158.5	185.3	264.1	455.8	646.3	761.7	99.0	737.8
35°	95.4	107.0	131.3	171.8	268.4	391.1	463.8	70.7	808.5
40°	57.7	64.5	93.9	120.6	157.9	239.7	291.4	50.0	858.5
45°	43.5	45.9	58.2	86.3	99.5	145.4	176.9	35.2	893.7
50°	37.7	39.0	42.8	61.0	68.3	89.3	109.1	26.2	919.9
55°	34.6	35.0	36.7	43.5	50.5	59.6	73.7	20.9	940.8
60°	30.2	31.1	32.8	34.2	38.6	42.0	53.5	17.5	958.3
65°	23.9	25.4	29.1	28.1	30.1	30.8	41.3	14.6	972.8
70°	17.0	18.4	22.5	23.3	23.4	22.7	30.8	11.5	984.3
75°	10.9	12.0	16.2	17.9	17.4	15.7	20.7	8.4	992.7
80°	6.2	6.7	9.0	10.7	11.0	9.3	11.6	5.0	997.7
85°	3.1	3.3	4.2	5.0	4.8	3.9	4.2	2.3	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE1E7N485G EAN: 4058352890066	LP number 59263_98
---------------------------------------	--	------------------------------

UGR-Table	Standard room	siteco								
-----------	---------------	---------------	--	--	--	--	--	--	--	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	14.6	15.8	15.0	16.1	16.5	19.6	20.8	20.0	21.1	21.5
	3H	15.8	16.9	16.2	17.2	17.6	20.2	21.2	20.6	21.6	21.9
	4H	16.1	17.2	16.5	17.5	17.9	20.5	21.4	20.9	21.8	22.2
	6H	16.3	17.3	16.8	17.7	18.1	20.7	21.5	21.1	21.9	22.3
	8H	16.5	17.4	17.0	17.7	18.1	20.8	21.6	21.3	21.9	22.4
	12H	16.6	17.4	17.0	17.8	18.2	20.9	21.5	21.3	21.9	22.3
4H	2H	15.4	16.4	15.8	16.7	17.1	19.6	20.6	20.0	21.0	21.3
	3H	16.8	17.7	17.3	18.1	18.5	20.3	21.1	20.7	21.5	22.0
	4H	17.4	18.1	17.8	18.5	19.0	20.7	21.4	21.1	21.8	22.3
	6H	17.6	18.3	18.1	18.7	19.2	21.0	21.6	21.4	22.0	22.5
	8H	17.8	18.3	18.2	18.8	19.3	21.1	21.6	21.6	22.1	22.6
	12H	17.8	18.4	18.3	18.8	19.3	21.2	21.6	21.7	22.1	22.6
8H	4H	17.8	18.4	18.3	18.8	19.3	20.8	21.4	21.2	21.8	22.3
	6H	18.3	18.7	18.8	19.2	19.7	21.2	21.6	21.7	22.1	22.6
	8H	18.4	18.8	18.9	19.3	19.8	21.3	21.7	21.8	22.2	22.7
	12H	18.5	18.9	19.1	19.4	19.9	21.4	21.7	21.9	22.2	22.8
12H	4H	17.9	18.3	18.4	18.8	19.3	20.8	21.3	21.2	21.7	22.2
	6H	18.4	18.8	18.9	19.3	19.8	21.2	21.6	21.7	22.1	22.6
	8H	18.6	18.9	19.1	19.4	20.0	21.3	21.7	21.9	22.2	22.7

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1500 B = 58
-----------------	---------------------------------	-------------------------------	--------------------

C-planes	γ	0° 180°	15°	30°	45°	60°	75°	90° 270°
			165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°	
Luminance in cd/m²								
45°		6030.1	6360.9	8063.2	11963.1	13801.2	20160.9	24534.1
50°		5756.4	5945.7	6527.9	9309.8	10419.6	13625.7	16646.8
55°		5908.0	5979.6	6276.8	7431.5	8635.3	10192.3	12601.4
60°		5913.3	6107.7	6434.8	6711.6	7567.8	8232.1	10489.4
65°		5551.2	5886.7	6755.0	6521.2	6990.1	7140.6	9584.7
70°		4866.8	5264.1	6444.0	6685.7	6706.9	6497.9	8837.4
75°		4112.9	4549.3	6134.6	6793.4	6597.2	5963.0	7837.4
80°		3474.7	3757.6	5085.0	6017.2	6193.9	5244.2	6560.9
85°		3515.5	3749.5	4770.9	5655.1	5417.8	4380.6	4694.4

Photometric test report

Family Licross® 21 Recessed	Order number: 52TE1E7N485G EAN: 4058352890066	LP number 59263_98
--	--	-------------------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

