

Photometric test report

Family
Licross® 21 Recessed

Order number: 52TL12DN4AXG3C
EAN: 4058352908082

LP number
59101_330




Version cover frosted, wide distribution, high visual comfort
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-DALI
Setting emergency light operation: 3 h
Rated values Net luminous flux = 950 lm
 Power consumption = 6.7 W
 Luminous efficacy = 141.8 lm/W

serial
documentation
17.08.2023

sitEco

Luminous intensity in cd/klm C180-0 C270-90

Imax: 671 cd/klm

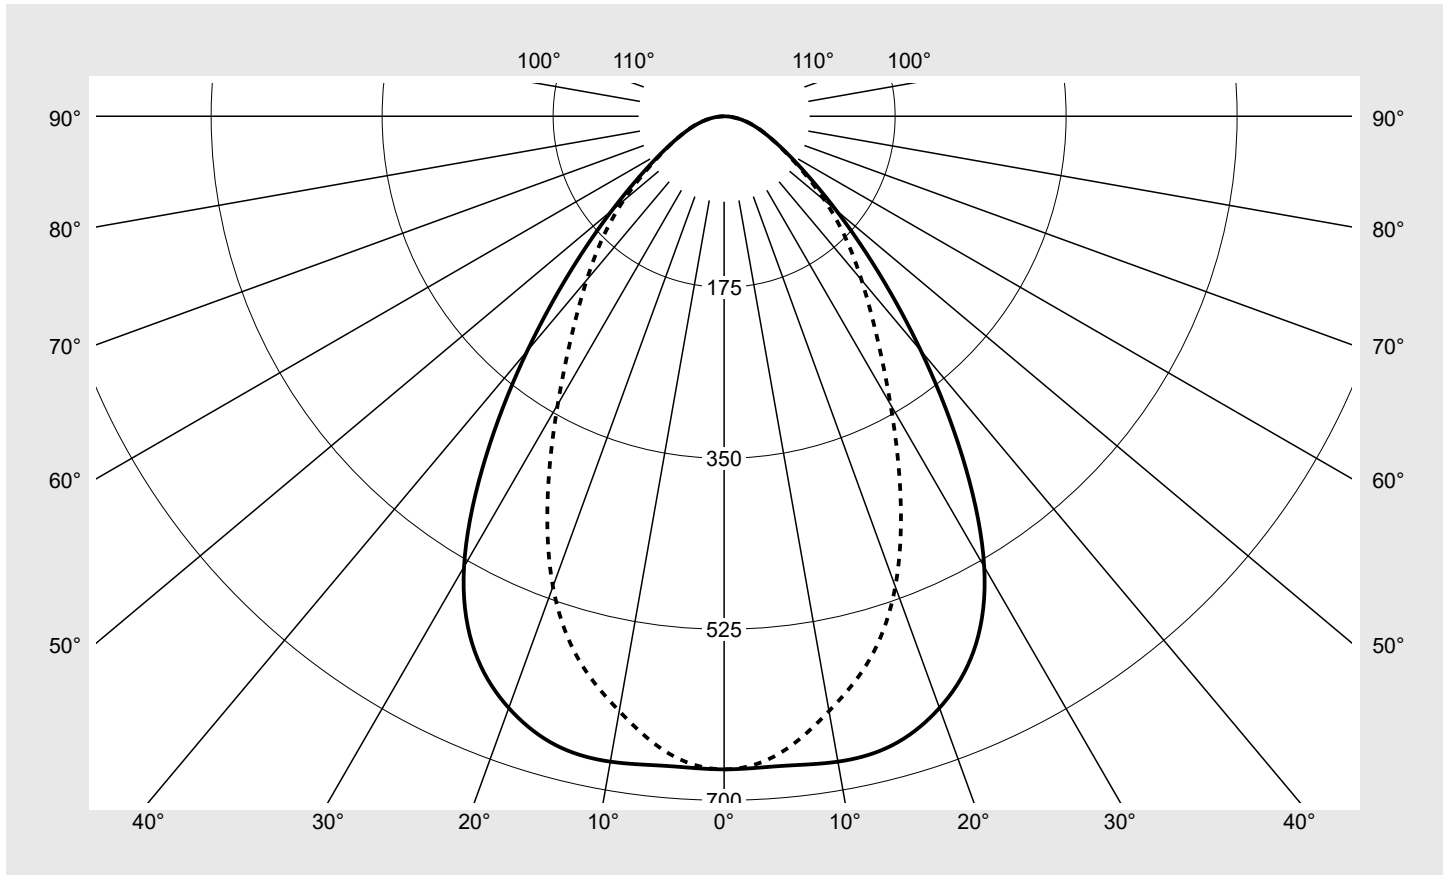

Classifications

DIN 5040 A 6 0
 CIE N1=72 N2=92 N3=99
 N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 21 Recessed	Order number: 52TL12DN4AXG3C EAN: 4058352908082	LP number 59101_330
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	668.4	668.4	668.4	668.4	668.4	668.4	668.4	4.0	4.0
5°	667.5	664.4	657.4	655.8	655.7	654.2	654.4	31.4	35.4
10°	670.7	665.0	649.1	636.1	625.3	618.7	618.1	60.9	96.3
15°	666.2	657.2	632.9	612.0	594.0	578.5	575.5	87.4	183.7
20°	644.4	632.9	606.9	585.4	554.6	522.7	512.3	108.8	292.5
25°	604.1	590.6	566.7	541.2	494.5	444.9	427.0	121.8	414.2
30°	532.4	517.7	496.3	466.1	413.9	359.9	340.6	122.9	537.1
35°	425.0	409.7	387.0	361.9	325.4	286.0	271.1	111.0	648.1
40°	313.4	295.8	270.7	255.1	246.8	229.4	218.8	91.8	739.9
45°	219.2	200.3	175.7	171.1	181.8	184.7	175.5	71.8	811.7
50°	149.7	132.6	112.6	116.3	133.0	145.6	134.9	54.8	866.5
55°	102.7	89.1	74.7	81.5	98.1	107.9	98.1	41.3	907.7
60°	72.4	62.1	51.3	58.3	71.8	76.5	71.0	31.0	938.7
65°	52.1	44.3	35.9	41.6	51.4	54.2	52.1	23.1	961.9
70°	37.6	31.7	24.7	29.1	35.6	38.4	38.3	16.9	978.8
75°	26.0	21.3	16.2	19.0	22.9	25.9	26.8	11.6	990.4
80°	16.1	12.5	9.2	10.4	12.6	14.8	15.7	6.8	997.3
85°	7.0	5.4	3.8	4.1	4.8	5.7	5.8	2.7	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 21 Recessed	Order number: 52TL12DN4AXG3C EAN: 4058352908082	LP number 59101_330
---------------------------------------	------------------------------------------------------------------	-------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	13.6	15.0	13.9	15.3	15.6	13.5	14.9	13.9	15.2	15.6
	3H	14.2	15.4	14.5	15.8	16.1	14.3	15.6	14.7	15.9	16.2
	4H	14.4	15.6	14.8	16.0	16.3	14.6	15.8	15.0	16.2	16.5
	6H	14.7	15.8	15.1	16.1	16.5	14.9	16.0	15.3	16.3	16.7
	8H	14.9	15.8	15.3	16.2	16.6	15.0	16.0	15.5	16.4	16.8
	12H	14.9	15.8	15.4	16.2	16.6	15.1	16.0	15.5	16.4	16.8
4H	2H	13.7	14.9	14.1	15.3	15.6	13.7	14.9	14.1	15.2	15.6
	3H	14.4	15.4	14.8	15.8	16.2	14.7	15.6	15.1	16.0	16.4
	4H	14.7	15.6	15.2	16.0	16.5	15.1	16.0	15.5	16.4	16.8
	6H	15.1	15.8	15.5	16.2	16.7	15.5	16.2	15.9	16.7	17.1
	8H	15.2	15.9	15.7	16.3	16.8	15.6	16.3	16.1	16.7	17.2
	12H	15.3	15.9	15.8	16.4	16.9	15.7	16.3	16.2	16.7	17.2
8H	4H	14.8	15.5	15.3	15.9	16.4	15.2	15.8	15.6	16.3	16.8
	6H	15.2	15.7	15.7	16.2	16.7	15.6	16.1	16.1	16.6	17.1
	8H	15.3	15.8	15.8	16.3	16.8	15.8	16.2	16.3	16.7	17.3
	12H	15.5	15.9	16.0	16.4	16.9	15.9	16.3	16.4	16.8	17.3
12H	4H	14.8	15.4	15.3	15.9	16.4	15.2	15.7	15.7	16.2	16.7
	6H	15.2	15.7	15.7	16.2	16.7	15.6	16.1	16.1	16.6	17.1
	8H	15.4	15.8	15.9	16.3	16.8	15.8	16.2	16.3	16.7	17.2

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1500 B = 58
------------------------	---------------------------------------------------	--------------------------------------	----------------------------------

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		3385.3	3093.9	2712.8	2642.8	2807.4	2852.2	2710.6	
50°		2542.8	2252.1	1913.0	1975.8	2259.3	2473.7	2290.9	
55°		1954.5	1696.7	1422.5	1552.0	1867.2	2055.1	1866.7	
60°		1580.8	1356.9	1120.5	1274.2	1567.3	1670.9	1550.1	
65°		1346.2	1145.8	928.8	1075.5	1329.3	1399.2	1344.9	
70°		1199.6	1011.5	788.7	927.6	1135.5	1226.0	1222.9	
75°		1096.9	898.5	684.9	800.7	966.6	1091.0	1130.4	
80°		1011.7	788.7	580.3	656.8	794.0	933.8	989.9	
85°		877.4	675.8	477.2	514.6	604.9	708.4	731.4	

Photometric test report

Family Licross® 21 Recessed	Order number: 52TL12DN4AXG3C EAN: 4058352908082	LP number 59101_330
----------------------------------------------	------------------------------------------------------------------	--------------------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

siteco

