

Order No.: 51MT1LD0JHFEDC02 | **GTIN (EAN):** 4058352219539


Product description: Tar21,LED4290lm830,DA,li,M600



Taris® 21, office luminaire, primary anti-glare with micro louvre, primary optical cover: axial lens, of PMMA, structured, CAT 2 ($L \leq 1500 \text{cd/m}^2$), light emission: direct distribution, primary light characteristic: symmetric, installation type: lay-in mounting, LED, rated luminous flux: 4.290lm, luminous efficacy: 157lm/W, light colour: 830, colour temperature: 3000K, control gear: ECG DALI, with terminal, 5-pole, mains connection: 230V, AC, 50Hz, rated input power: 27W, housing, luminaire housing, of plastic, traffic white (RAL 9016), module: M600, length: 597mm, width: 597mm, height: 42mm, protection rating (complete): IP20, insulation class (complete): insulation class I (protective earthing), certification: CE, ENEC, VDE, protection symbol: F, impact resistance: IK02, permissible operating ambient temperature: 0..+35°C, standard: EN 50419, packaging unit: 1 piece



Lamps:	LED
Wt. (kg):	2.9
GTIN (EAN):	4058352219539



Order No.: 51MT1LD0JHFEDC02 | GTIN (EAN): 4058352219539

Detailed technical description: Tar21,LED4290lm830,DA,li,M600



Key data

- Product type: office luminaire
- Product name: Taris® 21
- Order No.: 51MT1LD0JHFEDC02

Lighting technology | Lamps | Control gear

Component 1

Lighting technology:

- Cover: axial lens, structured
- Glare reduction: micro louvre
- Beam angle: wide distribution
- Symmetry: symmetric
- Light emission: direct distribution
- UGR viewing direction along longitudinal luminaire axis: ≤ 19
- UGR viewing direction along lateral luminaire axis: ≤ 19

Lamps:

- Lamps: with LED
- Rated luminous flux: 4290lm
- Luminous efficacy: 157lm/W
- Colour temperature: 3000K
- Colour rendering index: CRI > 80
- Light colour: 830
- SDCM (Standard Deviation of Colour Matching): MacAdam ≤ 3 SDCM (initial)
- Rated input power: 27W

Operating device:

- Control gear: ECG DALI
- Control: DALI

Certificates, Standards

- Protection rating: IP20
- Insulation class: insulation class I (protective earthing)
- Impact resistance: IK02
- Protection symbol: F
- Temperature range (operation): 0..+35°C
- Standard: EN 50419
- Certification, designation: CE, ENEC, VDE

Material, Colour

- housing: plastic, traffic white (RAL 9016)
- luminaire housing: plastic, traffic white (RAL 9016)
- Colour specification: traffic white (RAL 9016)
- Cover: axial lens of PMMA

Mounting

- Mounting method, mounting location: lay-in mounting, in the ceiling
- Arrangement: single arrangement

Electrical connection

- Connection: terminal, 5-pole
- Nominal voltage: 230V, 230..240V, 50Hz, AC

Dimensions, Weight


- Length: 597mm
- Width: 597mm
- Height: 42mm
- Weight: 2.9kg

Service life

- Rated service life: 50000h (L85/B50) at AT = 25°C

Order No.: 51MT1LD0JHFEDC02 | GTIN (EAN): 4058352219539

Dimensions: Tar21,LED4290lm830,DA,li,M600

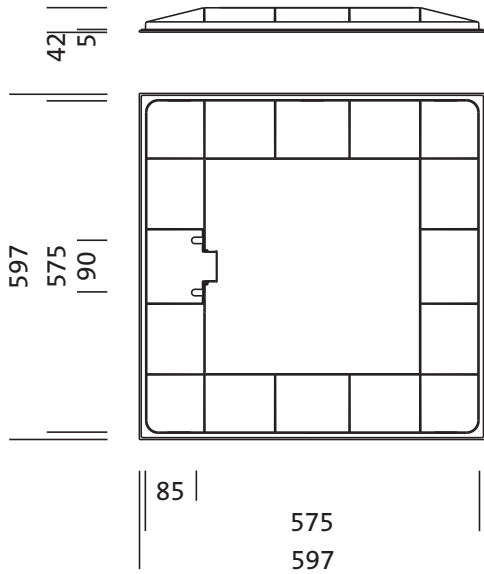

Order No.: 51MT1LD0JHFEDC02 | GTIN (EAN): 4058352219539


Planning data: Tar21,LED4290lm830,DA,li,M600

**51MT1LD0JHFEDC02: 1x
LED**

4058352219539

51MT1LD0JHFEDC02

LED 3000 K | CRI ≥ 80 ϕ_N 4290 lm



ϕ_{\downarrow} 100% ϕ_{\uparrow} 0%

Luminance values (cd/m²)

	C 0/180	C 90/270
L ₈₀	611	1141
L ₇₀	688	2130
L ₆₅	747	2777

UGR 15.8 18

X 4H Y 8H ρ 70/50/20 S 0.25H